

ATTACHMENT "B" NOTES:

THE FOLLOWING BMPs AS OUTLINED IN, BUT NOT LIMITED TO, THE CALIFORNIA STORMWATER BEST MANAGEMENT PRACTICES HANDBOOK, JANUARY 2003, OR THE LATEST REVISED EDITION, MAY APPLY DURING THE CONSTRUCTION OF THIS PROJECT. (ADDITIONAL MEASURES MAY BE REQUIRED IF DEEMED APPROPRIATE BY THE PROJECT ENGINEER OR THE BUILDING OFFICIAL)

EROSION CONTROL

- EC1- SCHEDULING
- EC2- PRESERVATION OF EXISTING VEGETATION
- EC3- HYDRAULIC MULCH
- EC4- HYDROSEEDING
- EC5- SOIL BINDERS
- EC6- STRAW MULCH
- EC7- GEOTEXTILES & MATS
- EC8- WOOD MULCHING
- EC9- EARTH DIKES AND DRAINAGE SWALES
- EC10- VELOCITY DISSIPATION DEVICES
- EC11- SLOPE DRAINS
- EC12- STREAMBANK STABILIZATION
- EC13- POLYACRYLAMIDE

TEMPORARY SEDIMENT CONTROL

- SE1- SILT FENCE
- SE2- SEDIMENT BASIN
- SE3- SEDIMENT TRAP
- SE4- CHECK DAM
- SE5- FIBER ROLLS
- SE6- GRAVEL BAG BERM
- SE7- STREET SWEEPING AND VACUUMING
- SE8- SANDBAG BARRIER
- SE9- STRAW BALE BARRIER
- SE10- STORM DRAIN INLET PROTECTION

WIND EROSION CONTROL

- WE1- WIND EROSION CONTROL

EQUIPMENT TRACKING CONTROL

- TC1- STABILIZED CONSTRUCTION ENTRANCE EXIT
- TC2- STABILIZED CONSTRUCTION ROADWAY
- TC3- ENTRANCE/OUTLET TIRE WASH

NON-STORMWATER MANAGEMENT

- NS1- WATER CONSERVATION PRACTICES
- NS2- DEWATERING OPERATIONS
- NS3- PAVING AND GRINDING OPERATIONS
- NS4- TEMPORARY STREAM CROSSING
- NS5- CLEAR WATER DIVERSION
- NS6- ILLICIT CONNECTION/DISCHARGE
- NS7- POTABLE WATER/IRRIGATION
- NS8- VEHICLE AND EQUIPMENT CLEANING
- NS9- VEHICLE AND EQUIPMENT FUELING
- NS10- VEHICLE AND EQUIPMENT MAINTENANCE
- NS11- PILE DRIVING OPERATIONS
- NS12- CONCRETE CURING
- NS13- CONCRETE FINISHING
- NS14- MATERIAL AND EQUIPMENT USE
- NS15- DEMOLITION ADJACENT TO WATER
- NS16- TEMPORARY BATCH PLANTS

WASTE MANAGEMENT & MATERIAL POLLUTION CONTROL

- WM1- MATERIAL DELIVERY AND STORAGE
- WM2- MATERIAL USE
- WM3- STOCKPILE MANAGEMENT
- WM4- SPILL PREVENTION AND CONTROL
- WM5- SOLID WASTE MANAGEMENT
- WM6- HAZARDOUS WASTE MANAGEMENT
- WM7- CONTAMINATION SOIL MANAGEMENT
- WM8- CONCRETE WASTE MANAGEMENT
- WM9- SANITARY/SEPTIC WASTE MANAGEMENT
- WM10- LIQUID WASTE MANAGEMENT






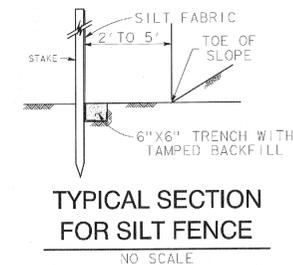


TABLE B
CRITICAL SLOPE/SHEET FLOW LENGTH COMBINATIONS

| SLOPE PERCENTAGE | SHEET FLOW LENGTH NOT TO EXCEED |
|------------------|---------------------------------|
| 0-25% (0-4:1) | 20' |
| 25-50% (4:1-2:1) | 15' |
| OVER 50% (2:1) | 10' |

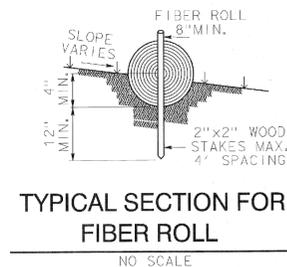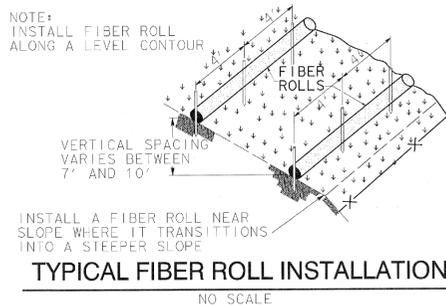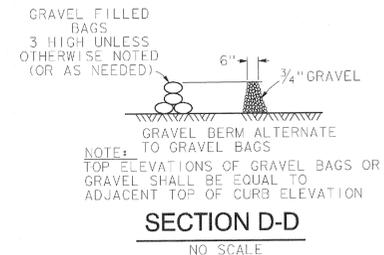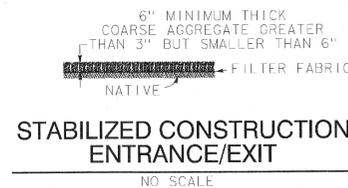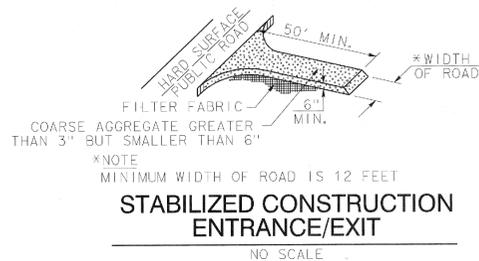

Donald A. O'Brien

SEE SHEET 5 FOR
EROSION CONTROL PLAN

MIDTOWN SITE RESTORATION PROJECT- LOS OSOS, CA

EROSION CONTROL NOTES AND DETAILS

| | | | |
|-------------------------------|-------------------------|-------------------------------|------|
| DESIGN/DRAWN: KD/TW | COUNTY PLAN CHECKER: | DEVELOPMENT SERVICES ENGINEER | DATE |
| JOB NO.: 16460 | COUNTY W.O. NO.: 300448 | PROJECT ENGINEER | DATE |
| CALIFORNIA COORDINATES: N 670 | | E: 1150 | |

SHEET 4 OF 10

RICK ENGINEERING COMPANY
711 TANK FARM ROAD - SUITE 110
SAN LUIS OBISPO, CA 93401
805.544.0707
IFAX 805.544.2052
rickengineering.com

San Luis Obispo San Diego Bakersfield Riverside Orange Sacramento Phoenix Tucson

BID SET