

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

TABLE OF CONTENTS

	Beginning w/ <u>Page No.</u>
NOTICE AND INSTRUCTIONS TO BIDDERS	1
NOTICE TO BIDDERS.....	2
BID PROTESTS	5
SPECIAL INSTRUCTIONS TO BIDDERS	6
BID PROPOSAL AND FORMS.....	7
BID PROPOSAL	8
ADDENDA ACKNOWLEDGMENT	10
BIDDERS INFORMATION LIST	12
DESIGNATION OF SUBCONTRACTORS FORM – BASE BID	13
DESIGNATION OF SUBCONTRACTORS FORM – ADDITIVE BID ITEM.....	14
BIDDER'S NON-COLLUSION DECLARATION (STATE FORM).....	15
BIDDER'S BOND.....	16
CONTRACT AGREEMENT	19
AGREEMENT	20
AGREEMENT SIGNATURE PAGE.....	29
PERFORMANCE BOND.....	30
PAYMENT BOND.....	33
SPECIAL PROVISIONS	36
SECTION 1. SPECIFICATIONS AND PLANS	40
1-1.01 SPECIFICATIONS AND PLANS.....	40
SECTION 2. PROPOSAL REQUIREMENTS AND CONDITIONS.....	42
2-1.01 PROPOSAL REQUIREMENTS AND CONDITIONS	42
2-1.02 REQUIRED LISTING OF PROPOSED SUBCONTRACTORS	43
SECTION 3. AWARD AND EXECUTION OF CONTRACT.....	44
3-1.01 AWARD OF CONTRACT.....	44
3-1.02 CONTRACT BONDS	44
3-1.03 EXECUTION OF CONTRACT	45
SECTION 4. PROSECUTION AND PROGRESS OF THE WORK	46

4-1.01	GENERAL.....	46
4-1.02	LIQUIDATED DAMAGES.....	46
4-1.03	CONTRACT SUBMITTALS.....	46
4-1.04	MANDATORY PRE-CONSTRUCTION CONFERENCE.....	47
SECTION 5. GENERAL AND MISCELLANEOUS		48
5-1.01	DEFINITIONS AND TERMS.....	48
5-1.02	SCOPE OF WORK.....	48
5-1.03	CONTROL OF WORK	49
5-1.04	PREVAILING WAGE.....	50
5-1.05	PROGRESS SCHEDULE	51
5-1.06	PRESERVATION OF PROPERTY	52
5-1.07	MEASUREMENT AND PAYMENT	52
5-1.08	DETERMINATION OF DISPUTES	54
5-1.09	AUDIT OF RECORDS.....	58
5-1.10	CONTRACTOR’S REPORTS	58
5-1.11	REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES	58
5-1.12	SUBCONTRACTING	58
5-1.13	CONSTRUCTION SUBMITTALS.....	59
5-1.14	MEANS AND METHODS.....	60
5-1.15	LEGAL ADDRESS OF THE CONTRACTOR	60
5-1.16	WEEKLY PROGRESS MEETINGS	60
5-1.17	GOVERNMENT CODE CLAIM REQUIREMENTS	61
5-1.18	SURFACE MINING AND RECLAMATION ACT	61
5-1.19	FAIR EMPLOYMENT AND HOUSING ACT	62
5-1.20	SOLID WASTE MANAGEMENT	62
SECTION 6. (BLANK).....		66
SECTION 7. (BLANK).....		66
SECTION 9. DESCRIPTION OF WORK.....		9-1
SECTION 10. CONSTRUCTION DETAILS.....		10-1
SECTION 11. AMENDMENT TO STANDARD SPECIFICATION.....		11-1
SECTION 12. ENVIRONMENTAL PERMIT SUMMARY FORM		12-1

ATTACHMENTS

A- POTHOLING INFORMATION

B – THE GAS COMPANY LETTER

C – CONCEPTUAL WATER POLLUTION CONTROL PLANS

PLANS

**COUNTY OF SAN LUIS OBISPO
DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION**

**NOTICE AND INSTRUCTIONS
TO BIDDERS**

FOR

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

**COUNTY OF SAN LUIS OBISPO
DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
NOTICE TO BIDDERS**

Sealed proposals will be received at the office of the County Clerk, 1055 Monterey Street, Room D-120, San Luis Obispo, California 93408 until 3:00 P.M. on Thursday, _____, 20__, which bids will then be opened and declared at 3:15 o'clock P.M. on the above mentioned date at a public meeting at 1055 Monterey Street, Room D-120, by the County Clerk, for the following Public Works Project:

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

Any bid received at the Office of the Clerk of the Board of Supervisors of the County of San Luis Obispo after 3:00 P.M. on the date specified above shall not be considered, and shall be returned to the bidder unopened.

Bids are required for the entire work described herein. The award of the contract, if it be awarded, will be to the responsible bidder with the lowest responsive bid price on the base bid without any consideration of any prices on the additive bid item. The County of San Luis Obispo reserves the right to add the additive bid item to the award of the contract after the lowest responsible bidder has been determined, and the bidder is bound by its bid amount for said additive bid item. Such award, if made, will be made within 60 calendar days after the opening of proposals, and bidder agrees to be bound by its bid, including all of its bid prices, for the entire 60 day period.

A bound copy of a reduced size set of the Project Plans, the Agreement, the General and Special Provisions, and blank forms suitable for use in bidding on said work may be obtained from the Department of Public Works, Room 207, County Government Center, San Luis Obispo, CA 93408 and may be purchased therefrom for \$ _____, (tax included), per bound copy, said purchase cost not to be refunded. No bid will be considered which is not on the forms herein provided. **A full size set of the Project Plans and cross sections, if available, are charged separately at the department's current rates and will be provided only upon request.**

Pursuant to the provisions of Section 1773 of the California Labor Code, the Board of Supervisors of the County of San Luis Obispo has obtained from the Director of the California Department of Industrial Relations the general prevailing rate of per diem wages and the general prevailing rate for holiday and overtime work for the locality in which the work is to be performed for each needed craft, classification, or type of workman. Copies of said prevailing rate of per diem wages are on file in the Office of the Clerk of the Board of Supervisors and available at the California Department of Industrial Relations' web site address at: www.dir.ca.gov/DLSR/PWD.

Bidders are advised that any contractor who is awarded a public works project and intends to use a craft or classification not shown on the general prevailing wage determination may be required to pay the wage rate of that craft or classification most closely related to it as shown in the general determinations effective at the time of the call for bids.

Travel and Subsistence Payments shall be in accordance with Section 1773.1 of the Labor Code. Wage rates for holiday and overtime work shall be in accordance with Section 1773 of the Labor Code. Attention is directed to the provisions in Sections 1777.5, 1777.6, and 1777.7 of the Labor Code concerning the employment of apprentices by the Contractor or any subcontractor. Attention is directed to the provisions in Section 1776 of the Labor Code concerning payroll records.

Attention is directed to the provisions in Sections 1810 – 1815 of the Labor Code concerning work hours.

The bidder's attention is directed to the provisions of Section 2-1.02, "Required Listing of Proposed Subcontractors," of the Special Provisions regarding the requirement that proposed subcontractors be listed in the bidder's proposal. A "DESIGNATION OF SUBCONTRACTORS – BASE BID" and "DESIGNATION OF SUBCONTRACTORS – ADDITIVE BID ITEM" forms for listing subcontractors, as required, is included in the section titled "Bid Proposal and Forms" of the Contract Documents. These forms must be completed and submitted with bidder's bid proposal.

All bonds and endorsements thereto to be submitted pursuant to this contract shall be written by a company authorized to do surety business in the State of California.

Each bid must be accompanied by a form of bidder's security, namely cash, certified check, cashier's check, or bidder's bond, in the amount of ten percent (10%) of the total of the total base bid.

All addenda issued before the time in which to submit bids expires shall form a part of the Contract Documents and shall be covered in the bid. Bidders shall acknowledge and confirm receipt of each and every addendum in their bid proposal.

Within ten (10) calendar days, not including Saturdays, Sundays and legal holidays, after receipt of notice that the contract has been awarded, the successful bidder, shall execute a written contract with the County in the form prescribed herein.

At the time of execution of the contract, the successful bidder shall submit the certificates of insurance stipulated in Article 7 of the Agreement, and, in addition thereto, shall furnish a "Performance Bond" in the sum of one hundred percent (100%) of the contract base bid plus the additive bid item, if added by the County, to guarantee the performance of the contract, and a "Payment Bond" in the sum of one hundred percent (100%) of the base bid plus the additive bid item, if added by the County.

In accordance with San Luis Obispo County Code, Title 8, Health and Sanitation, Chapter 8.12, "Solid Waste Management", a project "Recycling Plan" and "Disposal Report" are required for this contract. The bidder's attention is directed to Sections 4-1.03, "Contract Submittals", and 5-1.20, "Solid Waste Management" of the Special Provisions.

Attention is directed to the provisions of Section 5-1.07, "Measurement and Payment," of the Special Provisions permitting the substitution of equivalent securities for any moneys withheld to ensure performance of this contract. Said Section 5-1.07 is incorporated by reference in this invitation for bid as if fully set forth at length.

The Board of Supervisors reserves the right to reject any or all bids, and to waive discrepancies, irregularities, informalities or any other errors in the bids or bidding, if to do so seems to best serve

the public interest. The right of Board of Supervisors to waive errors applies even if the Contract Documents state that a discrepancy, irregularity, informality or other error makes a bid nonresponsive, so long as the error does not constitute a material error.

The successful bidder must be licensed to perform the work in accordance with the laws of the State of California. Accordingly, the successful bidder shall possess a Class A general engineering contractor's license at the time this contract is awarded. In the alternative, the successful bidder shall possess a specialty contractor's license that permits the successful bidder to perform with his or her own organization contract work amounting to not less than 30% of the original total contract price and to subcontract the remaining work in accordance with Section 5-1.055, "Subcontracting," of the Amendments to the Standard Specifications. Failure of the bidder to be properly and adequately licensed shall constitute a failure to execute the contract and shall result in the forfeiture of the bidder's security.

Bidders must satisfy themselves by personal examination of the location of the proposed work and by such other means as they prefer as to the actual conditions and requirements of the work, and shall not at any time after submission of the bid dispute, complain, or assert that there was any misunderstanding in regard to the nature or amount of work to be done.

By order of the Board of Supervisors County of San Luis Obispo made this _____ day of _____, 20____.

County Clerk and Ex-officio Clerk
of the Board of Supervisors

By _____
Deputy Clerk

BID PROTESTS

Any bid protest must be submitted in writing to the Department of Public Works, Room 207, County Government Center, 976 Osos Street, San Luis Obispo, CA 93408; Attention: Design Engineer before 5 p.m. of the 7th business day following bid opening.

The initial protest document shall contain a complete statement of the basis for the protest and all evidence and documents supporting the protest available to the protesting party. The protest shall refer to the specific portion of the document which forms the basis for the protest. The protest shall include the name, address and telephone number of the person representing the protesting party. The party filing the protest shall concurrently transmit a copy of the initial protest document and any attached documentation to all other parties with a direct financial interest which may be adversely affected by the outcome of the protest. Such parties shall include all other bidders who appear to have a reasonable prospect of receiving an award depending upon the outcome of the protest. The County Board of Supervisors will issue a decision on the protest.

The procedure and time limits set forth in this section are mandatory and are the bidder's sole and exclusive remedy in the event of bid protest and failure to comply with these procedures shall constitute a waiver of any right to further pursue the bid protest, including filing a Government Code Claim or legal proceedings.

SPECIAL INSTRUCTIONS TO BIDDERS

All bidder Requests for Information must be submitted no later than 3 days prior to the bid opening date. Requests submitted after said date may not be considered. Bidders should submit Requests for Information to the County during the bid period at the following website:

http://www.slocounty.ca.gov/PW/Design_Division/Projects_Out_To_Bid.htm

Attention is directed to Section 4-1.03, "Contract Submittals," of the Special Provisions regarding the time period to submit the listed items upon receipt of the fully executed contract.

Attention is directed to Section 5-1.19, "Fair Employment and Housing Act," of the Special Provisions.

**COUNTY OF SAN LUIS OBISPO
DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION**

BID PROPOSAL AND FORMS

FOR

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

BID PROPOSAL

TO: THE BOARD OF SUPERVISORS OF THE COUNTY OF SAN LUIS OBISPO, STATE OF CALIFORNIA:

Pursuant to and in compliance with your Notice to Bidders, the undersigned, as bidder, declares that the only person or parties interested in this proposal as principals are those named herein; that this proposal is made without collusion with any other person, firm or corporation; that he/she is aware of the provisions of Section 3700 of the Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self insurance in accordance with the provisions of that code, and he/she will comply with such provisions before commencing the performance of the work of this contract; that he/she has carefully examined the location of the proposed work, the annexed proposed form of contract, and he/she proposes, and agrees if this proposal is accepted, that he/she will contract with the Board of Supervisors of the County of San Luis Obispo in the form of the copy of the contract annexed hereto, to provide all necessary machinery, tools, apparatus and other equipment needed, and to do all of the work and furnish all the materials specified in the contract, in the manner and the time therein prescribed, and according to the requirements of the Department of Public Works and Transportation as therein set forth, and that he/she will take in full payment therefor the following unit prices, to-wit:

SEE NEXT PAGE FOR BID PROPOSAL FORM

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437
BID PROPOSAL**

BASE BID: BIKE LANE IMPROVEMENTS						
ITEM NO.	CODE NO.	DESCRIPTION OF ITEM	ESTIMATED QUANTITY	UNIT	BID UNIT PRICE	BID PRICE
1	074016	CONSTRUCTION SITE MANAGEMENT	1	LS	LUMP SUM	
2	074028	FIBER ROLLS	3800	LF		
3	074035	TEMPORARY CHECK DAM (TYPE 2)	175	LF		
4	120090	CONSTRUCTION AREA SIGNS	1	LS	LUMP SUM	
5	120100	TRAFFIC CONTROL SYSTEM	1	LS	LUMP SUM	
6	150742	REMOVE ROADSIDE SIGN	4	EA		
7	150769 (F)	REMOVE ASPHALT CONCRETE	7250	SF		
8	150805	REMOVE CULVERT	230	LF		
9	152255	RESET MAILBOX	4	EA		
10	152390	RELOCATE ROADSIDE SIGN	6	EA		
11	190101 (F)	ROADWAY EXCAVATION	1460	CY		
12	203032	EROSION CONTROL (HYDROSEED)	0.6	AC		
13	250201	CLASS 2 AGGREGATE BASE	1040	CY		
14	390133	HOT MIX ASPHALT (TYPE A)	360	TON		
15	394002	PLACE ASPHALT CONCRETE (MISCELLANEOUS AREA)	260	SY		
16	566011	ROADSIDE SIGN, ONE POST	2	EA		
TOTAL BID FOR BASE BID						

ADDITIVE BID ITEM 1						
ITEM NO.	CODE NO.	DESCRIPTION OF ITEM	ESTIMATED QUANTITY	UNIT	BID UNIT PRICE	BID PRICE
17	120100	TRAFFIC CONTROL SYSTEM	1	LS	LUMP SUM	
18	150711	REMOVE PAINTED TRAFFIC STRIPE	1940	LF		
19	150714	REMOVE THERMOPLASTIC TRAFFIC STRIPE	2330	LF		
20	150715	REMOVE THERMOPLASTIC PAVEMENT MARKING	60	SF		
21	374002	FOG SEAL COAT	95280	SF		
22	840515	THERMOPLASTIC PAVEMENT MARKINGS	270	SF		
23	840656	PAINT TRAFFIC STRIPE (2 COAT)	10450	LF		
24	850111	PAVEMENT MARKERS (RETROREFLECTIVE)	194	EA		
TOTAL BID FOR ADDITIVE BID ITEM 1						
TOTAL BID FOR BASE PLUS ADDITIVE BID ITEM 1						

(F) is the designation for final pay quantities as defined in Section 9-1.015, "Final Pay Quantities," of the Standard Specifications.

Bidder's Name: _____

Bidder represents that he/she has hereinabove set forth for each unit basis item of work a unit price and a total for the item, and for each lump sum item a total for the item, all in clearly legible figures in the respective spaces provided for that purpose. In the case of unit basis items, the amount set forth under the "Total" column is the extension of the unit price bid on the basis of the approximate quantity for the item.

In case of discrepancy between the unit price and the total set forth for a unit basis item, the unit price shall prevail, provided, however, if the amount set forth as a unit price is ambiguous, unintelligible, or uncertain for any cause, or is omitted, or is the same amount as the entry in the "Total" column, then the amount set forth in the "Total" column for the item shall prevail and shall be divided by the estimated quantity for the item and the price thus obtained shall be the unit price.

Bidder shall execute and submit with their proposal, each of the following:

- BIDDERS INFORMATION LIST
- DESIGNATION OF SUBCONTRACTORS – BASE BID
- DESIGNATION OF SUBCONTRACTORS – ADDITIVE BID ITEM
- BIDDER'S NON-COLLUSION DECLARATION (STATE FORM)
- BIDDER'S BOND

Bidder declares that he/she has read, and agrees to, the Special Provisions, including, without limitation, the provisions of Sections 1, 2, 3, 4, and 5 thereof.

Bidder shall list the name and address of each subcontractor to whom the bidder proposes to directly subcontract portions of the work as required by the provisions in Section 2-1.02, "Required Listing of Proposed Subcontractors," of these Special Provisions. The list of subcontractors shall also set forth the portion of work that will be done by each subcontractor listed. The "DESIGNATION OF SUBCONTRACTORS" form for listing the subcontractors is included in the section titled "Bid Proposal and Forms" of the Contract Documents.

Accompanying this bid proposal is a bidder's bond, cash, cashier's check, or a certified check, payable to the County of San Luis Obispo, for the sum of _____ Dollars (\$ _____), said amount being at least ten percent (10%) of the total of the base bid. The proceeds thereof shall become the property of the County of San Luis Obispo if the proposal is withdrawn after the time fixed in the Notice to Bidders for the opening of bids, or if, in case this bid is accepted by said Board of Supervisors and such bidder has received notice that the contract has been awarded to him/her, the undersigned shall fail within ten (10) calendar days, not including Saturdays, Sundays, and legal holidays, thereafter to execute a contract with the County and furnish the certificates of insurance and Payment and Performance bonds required by the Contract Documents. Otherwise, said guarantee, except a bidder's bond, will be returned to the undersigned.

This bid proposal may be withdrawn, in writing, prior to the time fixed in the Notice to Bidders for the opening of bids. It is understood and agreed that this bid proposal will not be withdrawn after the time fixed in the Notice to Bidders for the opening of bids. Bidders further agree that the failure of the County to open bids for this project exactly at the time fixed in said Notice shall not extend the time within which bids may be withdrawn.

The undersigned bidder will sign and deliver to the County of San Luis Obispo the written contract, together with the certificates of insurance and bonds described in the Notice to Bidders, within ten (10) calendar days, not including Saturday, Sundays, and legal holidays, after the undersigned has received notice that the contract has been awarded to him/her.

The undersigned, as bidder, declares that he/she is aware of the provisions of Section 3700 of the California Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self insurance in accordance with the provisions of that code, and will comply with such provisions before commencing the performance of the work of this contract.

The bidder's execution of the signature portion of this bid proposal shall also constitute an endorsement and execution of those certifications, questionnaires, and assurances which are a part of this proposal.

ADDENDA: The undersigned acknowledges and confirms the receipt of the following Addenda:

<u>Addenda Number</u>	<u>Date</u>
_____	_____
_____	_____
_____	_____

and agrees that said addenda are covered in the bid proposal and shall form a part of the Contract Documents.

If bidder or other interested person is a corporation, state legal name of corporation, also names of the president, secretary, treasurer, and manager thereof; if a partnership, state true name of firm, also names of all individual co-partners composing firm; if bidder or other interested person is an individual, state first and last names in full.

Bidder warrants and represents that he/she is licensed in accordance with an Act providing for the registration of Contractors, License No. _____, Class _____, License Expiration Date _____. (Note: The successful bidder must possess the license classification specified in the Notice to Bidders upon award of this contract.)

Name of Bidder _____

Signature of Bidder _____

Printed Name and Title _____

Business Address _____

Telephone Number _____

Date _____

NOTICE.If bidder is a corporation, the legal name of the corporation shall be set forth above together with the signature of the officer or officers authorized to sign contract in behalf of the corporation; if bidder is a partnership, the true name of the firm shall be set forth above together with the signature of the partner or partners authorized to sign contracts in behalf of the partnership; and if the bidder is an individual, his or her signature shall be placed above. If signature is by an agent, other than an officer of a corporation or a member of a partnership, a Power of Attorney must be on file with the County prior to opening of bids or submitted with the bid; otherwise, the bid will be disregarded as irregular and unauthorized.

RETURN THIS FORM WITH YOUR BID PROPOSAL

BIDDERS INFORMATION LIST

All bidders/proposers are required to provide the following information for all DBE and non-DBE contractors, who provided a proposal, bid, quote, or were contacted by the proposed prime contractor. This information is required from the proposed prime contractor and shall be submitted with their bid proposal. The Department of Public Works will use this information to maintain and update a "Bidder's List" to assist in the overall annual Disadvantaged Business Enterprise (DBE) availability goal setting process required for Federal-aid projects. This information is also being made available to other local agencies for the same purpose. *To the extent permitted by law, all information submitted will be held in strict confidence and will not be shared without your consent except as noted above.*

Contractor: Prime Contractor Subcontractor Supplier Other: _____

Firm Name: _____ Phone: _____

Business Address: _____ Fax: _____

License No. and Classification _____ Years in Business: _____

Contact Person: _____

Is the firm currently certified as a DBE by Caltrans? No Yes Cert. Number: _____

Gross Annual Receipts for last year:

- less than \$1 million less than \$5 million less than \$10 million
 less than \$15 million more than \$15 million

Type of work/ services/ materials provided for this job:

- Contractor Supplier Manufacturer Trucking Broker
 Other (describe): _____

Contractor Specialty for this job:

- Roadway Construction (including signing, paving, and concrete) (237310)
 Roadway Painting/Striping (237310)
 Highway Lighting & Signal Installation (238210)
 Bridge Construction (237310)
 Tunnel Construction (237990)
 Water, Sewer, & Pipeline Construction (237110)
 Power & Communication Transmission Line (including conduit construction) (237130)
 Landscaping (561730)
 Irrigation (237110)
 Other Heavy Construction (including parks, reclamation, reservoir, water & sewer treatment facilities) (237990)
 Masonry (including retaining walls and foundations) (238140)
 Concrete Retaining Walls (238110)
 Building Construction (236210/236220)
 Other (describe): _____

- Copy sheet as needed
- None of the information requested on this form is material to the County's determination of which Bidder's Bid is the lowest responsive bid.

RETURN THIS FORM WITH YOUR BID PROPOSAL

DESIGNATION OF SUBCONTRACTORS FORM – BASE BID

In compliance with the provisions of Sections 4100-4113 of the Public Contract Code of the State of California, and any amendments thereto, the undersigned bidder sets forth the following:

- a. The name and location of the place of business of each subcontractor who will perform work or labor, or render service to the undersigned Prime Contractor in or about the construction of the work or improvement, or a subcontractor licensed by the State of California who, under subcontract to the Prime Contractor, specially fabricates and installs a portion of the work or improvement according to detailed drawings contained in the plans and specifications, in an amount in excess of one-half of one percent of the undersigned Prime Contractor's total bid or in the case of bids for the construction of streets and highways, including bridges, in excess of one-half of one percent or ten thousand dollars (\$10,000), whichever is greater.*
- b. The portion of the work which will be done by each such subcontractor. Only one subcontractor shall be listed for each such portion.

Bid Schedule Item No.	Description of Portion of Work (if applicable)	Subcontractor	License No.	Address	Approximate Dollar Value

By: _____
 (Bidder's Signature/Printed Name and Title/Company Name)

*NOTE: When there is a failure to list a subcontractor, as required, the law provides that the Contractor agrees to do the work with his or her own forces. In such case, bidder must be authorized to perform said work. Any bid not complying with the provisions hereof may be rejected.

RETURN THIS FORM WITH YOUR BID PROPOSAL

DESIGNATION OF SUBCONTRACTORS FORM – ADDITIVE BID ITEM

In compliance with the provisions of Sections 4100-4113 of the Public Contract Code of the State of California, and any amendments thereto, the undersigned bidder sets forth the following:

- a. The name and location of the place of business of each subcontractor who will perform work or labor, or render service to the undersigned Prime Contractor in or about the construction of the work or improvement, or a subcontractor licensed by the State of California who, under subcontract to the Prime Contractor, specially fabricates and installs a portion of the work or improvement according to detailed drawings contained in the plans and specifications, in an amount in excess of one-half of one percent of the undersigned Prime Contractor's total bid or in the case of bids for the construction of streets and highways, including bridges, in excess of one-half of one percent or ten thousand dollars (\$10,000), whichever is greater.*
- b. The portion of the work which will be done by each such subcontractor. Only one subcontractor shall be listed for each such portion.

Bid Schedule Item No.	Description of Portion of Work (if applicable)	Subcontractor	License No.	Address	Approximate Dollar Value

By: _____ (Bidder's Signature/Printed Name and Title/Company Name)

*NOTE: When there is a failure to list a subcontractor, as required, the law provides that the Contractor agrees to do the work with his or her own forces. In such case, bidder must be authorized to perform said work. Any bid not complying with the provisions hereof may be rejected.

RETURN THIS FORM WITH YOUR BID PROPOSAL

BIDDER'S NON-COLLUSION DECLARATION (STATE FORM)

Bidder hereby states, under penalty of perjury, that the bid is not made in the interest of, or on behalf of, any undisclosed person, partnership, company, association, organization, or corporation; that the bid is genuine and not collusive or sham; that the bidder has not directly or indirectly induced or solicited any other bidder to put in a false or sham bid, and has not directly or indirectly colluded, conspired, connived, or agreed with any bidder or anyone else to put in a sham bid, or that anyone shall refrain from bidding; that the bidder has not in any manner, directly or indirectly, sought by agreement, communication, or conference with anyone to fix the bid price of the bidder or any other bidder, or to fix any overhead, profit, or cost element of the bid price, or of that of any other bidder, or to secure any advantage against the public body awarding the contract of anyone interested in the proposed contract; that all statements contained in the bid are true; and, further, that the bidder has not, directly or indirectly, submitted his or her bid price or any breakdown thereof, or the contents thereof, or divulged information or data relative thereto, or paid, and will not pay, any fee to any corporation, partnership, company association, organization, bid depository, or to any member or agent thereof to effectuate a collusive or sham bid.

I declare under penalty of perjury under the laws of the State of California that the foregoing is true and correct.

(Name of Company)

By: _____

Printed Name

Title

Date: _____

RETURN THIS FORM WITH YOUR BID PROPOSAL

BIDDER'S BOND

KNOW ALL BY THESE PRESENTS:

That we, _____

as Principal, and _____

as Surety, are held and firmly bound unto the County of San Luis Obispo, State of California (hereinafter called "County") in the penal sum of Ten Percent (10%) of the total aggregate amount of the bid of the Principal above named, submitted by said Principal to the County for the work described below, for the payment of which sum in lawful money of the United States, well and truly to be made, we bind ourselves, our heirs, executors, administrators and successors, jointly and severally, firmly by these presents. In no case shall the liability of the Surety hereunder exceed the sum of _____

_____ (\$_____).

THE CONDITION OF THIS OBLIGATION IS SUCH,

That whereas a bid to County for certain construction specifically described as follows, for which bids are to be opened on _____, 20____, has been submitted by Principal to County for:

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

NOW, THEREFORE, if the aforesaid Principal shall not withdraw said bid after the time fixed in the Notice to Bidders for the opening of the same, and shall within ten (10) calendar days, not including Saturdays, Sundays, and legal holidays, after receipt of written notice that the contract has been awarded to him/her, enter into a written contract with County, in the prescribed form, in accordance with the bid as accepted, and file with the County the certificates of insurance as stipulated in Article 7 of the Agreement and the two bonds, one to guarantee faithful performance and the other to guarantee payment for labor and materials, as required by law, then this obligation shall be null and void; otherwise, it shall remain in full force and effect, and the penal sum guaranteed by this bond shall be forfeited to the County.

Surety, for value received, hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of said contract or to the work to be performed thereunder or the specifications accompanying the same shall in any manner affect its obligations on this bond, and it does hereby waive notice of any such change, extension, alteration, or addition.

In the event suit is brought upon said bond by County and judgment is recovered, the Surety shall pay all costs incurred by County in such suit, including a reasonable attorney's fee to be fixed by the court. Death of the Principal shall not relieve Surety of its obligations hereunder.

IN WITNESS WHEREOF, we have hereunto set our hands and seals on this _____ day
of _____, 20____.

(Seal)

(Seal)

(Seal)

Principal

(Seal)

(Seal)

(Seal)

Surety

Address

NOTE:

Signatures of those executing for Surety must be properly acknowledged.

**COUNTY OF SAN LUIS OBISPO
DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION**

CONTRACT AGREEMENT

FOR

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

COUNTY OF SAN LUIS OBISPO

AGREEMENT

THIS AGREEMENT, made and entered into this _____ day of _____, 20_____, between the County of San Luis Obispo, a political subdivision and county of the State of California, party of the first part, hereinafter called "County" and _____ the party of the second part, hereinafter called "Contractor".

WITNESSETH, that for and in consideration of the mutual covenants and agreements hereinafter contained, the parties hereto agree as follows:

ARTICLE 1 – WORK

That the Contractor will, at its own proper cost and expense, do all the work and furnish all the equipment and materials necessary to construct and complete in good and workmanlike manner to the satisfaction of the Board of Supervisors of said County, for

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

all in strict accordance with the Contract Documents, including without limitation, the Project Plans, the Standard Specifications of the State of California, Department of Transportation, dated May 2006 (hereinafter called, "Standard Specifications"), the Standard Plans of the State of California, Department of Transportation, dated May 2006 (hereinafter called, "Standard Plans"), and the Special Provisions therefor, on file in the Department of Public Works and Transportation and the Office of the Clerk of the Board of Supervisors of the County of San Luis Obispo, State of California.

ARTICLE 2 – CONTRACT

This Agreement, together with the Notice and Instructions to Bidders, Bid Proposal and Forms, Standard Specifications, Standard Plans, the Special Provisions, including without limitation the Project Plans incorporated therein, and all addenda thereto, form the contract, and said documents by this reference become as fully a part of this Agreement as if set forth in full and are herein sometimes referred to as "Contract" or as "Contract Documents". The terms set forth below, when utilized in said documents, shall mean as follows:

PUBLIC WORKS DIRECTOR: Means the Director of Public Works and Transportation (hereinafter, also the Department of Public Works) of the County of San Luis Obispo, State of California, acting either directly or through properly authorized agent(s), acting within the scope of the particular duties delegated to them, including registered engineers employed by the Department of Public Works and Transportation.

COUNTY CLERK: Means the Clerk of the Board of Supervisors of the County of San Luis Obispo, State of California.

ARTICLE 3 – CONTRACT TIMES

The Contractor shall begin work within ten (10) calendar days not including Saturdays, Sundays, or legal holidays, from the date of receipt of the County's Notice to Contractor to Proceed, and the work to be accomplished under this contract shall be completed within the time limit provided in Section 4, "Prosecution and Progress of the Work", of the Special Provisions. Attention is directed to the provisions of said Section 4, "Prosecution and Progress of the Work", of the Special Provisions for the amount of liquidated damages.

ARTICLE 4 – CONTRACT PRICE

The total Contract price is the amount of the Contractor's bid as set forth in the award of the Contract approved by the County's Board of Supervisors. The Contractor will receive and accept and the County will pay the prices specified in the attached Bid Proposal, which is incorporated herein by reference, as full compensation for furnishing all labor, materials, and equipment for doing all the work contemplated and embraced in this Agreement. To the extent permitted by law, the Contractor assumes during the progress of the work and before its acceptance, any and all loss or damage arising out of the nature of the work aforesaid or from the action of the elements, or from any unforeseen difficulties or obstructions which may arise or be encountered in the prosecution of the work until its acceptance by the County; and assumes any and all expenses incurred by or in consequence of the suspension or discontinuance of work, for well and faithfully completing the work, and the whole thereof, in the manner and to the requirements of the Plans, Special Provisions, Standard Specifications, Standard Plans, and the Public Works Director.

ARTICLE 5 – SUBCONTRACTING

The Contractor's attention is directed to the provisions of Section 2-1.02, "Required Listing of Proposed Subcontractors," of the Special Provisions and the requirements contained therein.

Additionally, the Contractor's attention is directed to the provisions of the "Subletting and Subcontracting Fair Practices Act" set forth in Sections 4100-4114 of the Public Contract Code.

ARTICLE 6

The Contractor agrees that the Public Works Director shall decide as to the meaning of the Standard Specifications, Standard Plans, and Special Provisions for the work, including without limitation the Project Plans incorporated therein, where the same may be found to be obscure or in dispute and the decision shall be final. The Public Works Director shall have the right to correct any errors or omissions therein when such corrections are necessary to the proper fulfillment of the intention of the Special Provisions, Standard Specifications and Standard Plans; the action of such corrections is to take effect from the time said Public Works Director gives notice thereof to the Contractor.

ARTICLE 7 - INSURANCE REQUIREMENTS

Contractor, at its sole cost, shall purchase and maintain the insurance policies set forth below on all of its operations under this Agreement. All of the insurance companies providing insurance for Contractor shall have, and provide evidence of, an A.M. Best & Co. rating of A:VII or above, unless

exception is granted by Risk Manager. Further, all policies shall be maintained for the full term of this Agreement and related warranty period if applicable.

7.01 SCOPE AND LIMITS OF REQUIRED INSURANCE POLICIES

A. COMMERCIAL GENERAL LIABILITY

Policy shall include coverage at least as broad as set forth in Insurance Services Office Commercial General Liability Coverage (CG 00 01) with policy limits of not less than \$2 million dollars combined single limit per occurrence. Policy shall be endorsed with the following specific language or contain equivalent language in the policy:

- i.) The County of San Luis Obispo, its officers, officials, employees, and volunteers are named as an additional insured for all liability arising out of the operations by or on behalf of the named insured in the performance of this Agreement. General liability coverage can be provided in the form of an endorsement to the Contractor's insurance as least as broad as ISO Form CG 20 10 11 85 or if not available, through the addition of both CG 20 10 and CG 20 37 (if a later edition is used).
- ii.) The insurance provided herein shall be considered primary coverage to the County of San Luis Obispo with respect to any insurance or self insured retention maintained by the County. Further, the County's insurance shall be considered excess insurance only and shall not be called upon to contribute to this insurance.
- iii.) The policy shall not be cancelled or materially changed without first giving thirty days prior written notice to the County of San Luis Obispo, Department of Public Works.

B. BUSINESS AUTOMOBILE POLICY

Policy shall include coverage at least as broad as set forth in the liability section of Insurance Services Office Business Auto Coverage (CA 00 01) with policy limits of no less than \$1 million dollars combined single limit for each occurrence. Said insurance shall include coverage for owned, non-owned, and hired vehicles. Policy shall be endorsed with the following specific language or contain equivalent language in the policy:

- i.) The County of San Luis Obispo, its officers, officials, employees, and volunteers are named as an additional insured for all liability arising out of the operations by or on behalf of the named insured in the performance of this Agreement.
- ii.) The policy shall not be cancelled or materially changed without first giving thirty days prior written notice to the County of San Luis Obispo, Department of Public Works.

C. WORKERS' COMPENSATION / EMPLOYERS' LIABILITY INSURANCE

- i. Workers' Compensation: policy shall provide statutory limits as required by State of California. Policy shall be endorsed with the following specific language or contain equivalent language in the policy:
 - a. Contractor and its insurer shall waive all rights of subrogation against the County, its officers and employees for workers' compensation losses arising out of this Agreement.
 - b. The policy shall not be cancelled or materially changed without first giving thirty days prior written notice to the County of San Luis Obispo, Department of Public Works.
- ii. Employer's Liability: policy shall provide \$1 million dollars per accident for bodily injury or disease.

If the Contractor maintains higher limits than the minimum shown above, the County requires and shall be entitled to coverage for the higher limits maintained by the Contractor.

7.02 DEDUCTIBLES AND SELF-INSURANCE RETENTIONS

All deductibles and/or self-insured retentions which apply to the insurance policies required herein will be declared in writing and approved by the County prior to commencement of this Agreement.

7.03 DOCUMENTATION

Prior to commencement of work and annually thereafter for the term of this Agreement, Contractor will provide to the County of San Luis Obispo, Department of Public Works, Room 207, County Government Center, CA 93408, Attention Design Engineer, Contract No. 300437, properly executed certificates of insurance clearly evidencing the coverage, limits, and endorsements specified in this Agreement. Further, at the County's request, the Contractor shall provide certified copies of the insurance policies within thirty days of request.

Failure of the County to demand such certificates or other evidence of Contractor's full compliance with these insurance requirements or failure of the County to identify a deficiency in compliance from the evidence provided shall not be construed as a waiver of Contractor's obligation to obtain and maintain such insurance.

7.04 ABSENCE OF INSURANCE COVERAGE

County may direct Contractor to immediately cease all activities with respect to this Agreement if it determines that Contractor fails to carry, in full force and effect, all insurance policies with coverage levels at or above the limits specified in this Agreement. Any delays or expense caused due to stopping of work and change of insurance shall be considered Contractor's delay and expense.

7.05 SPECIAL RISKS OR CIRCUMSTANCES

The County reserves the right to modify these requirements, including limits, based on the nature of the risk, prior experience, insurer, coverage, or other special circumstances.

ARTICLE 8 – INDEMNIFICATION

Contractor shall defend, indemnify, and hold harmless the County, its officers, employees, and volunteers from all claims, demands, damages, costs, expenses, judgments, attorney fees, liabilities, or other losses (hereafter, collectively “claims”) that may be asserted by any person or entity, and that arise out of or relate in any way to any acts or omissions relating to the performance of any duty, obligation, or work hereunder. The obligation to indemnify shall be effective and shall extend to all such claims, in their entirety, even when such claims arise from the comparative negligence of the County, its officers or employees. However, this indemnity will not extend to any claims arising out of the sole negligence or willful misconduct of the County, its officers or employees.

The preceding paragraph applies to any theory of recovery relating to said act or omission by the Contractor, or its agents, employees, or other independent contractors directly responsible to Contractor, including, but not limited to the following:

1. Violation of statute.
2. Professional malpractice.
3. Willful, intentional or other wrongful acts, or failures to act.
4. Negligence or recklessness.
5. Furnishing of defective or dangerous products.
6. Broad Form Property Damage (Including Completed Operations).
7. Premises Liability.
8. Strict Liability.
9. Inverse condemnation.
10. Violation of civil rights
11. Violation of any federal or state statute, regulation, or ruling resulting in a determination by the Internal Revenue Service, California Franchise Tax Board, or any other California entity responsible for collecting payroll taxes, when the Contractor is not an independent contractor.

Nothing contained in the foregoing indemnity provisions shall be construed to require the Contractor to indemnify the County, against any responsibility or liability in contravention of Civil Code 2782.

It is the intent of the parties to provide the County the fullest indemnification, defense, and “hold harmless” rights allowed under the law. If any word(s) contained herein are deemed by a court to be

in contravention of applicable law, said word(s) shall be severed from this contract and the remaining language shall be given full force and effect.

All of the preceding indemnification rights granted the County above shall survive any termination of this agreement.

ARTICLE 9 – FINAL PAYMENT

It is mutually agreed between the parties hereto, that no certificate given or payments made under this contract, except the final payment, shall be evidence of the performance of this contract, either wholly or in part, against any claim of the Contractor. Final payment for the work performed under this contract shall not be made until the lapse of thirty-five (35) calendar days after the notice of completion of said work has been filed for record and no payment shall be construed to be an acceptance of any defective work or improper materials. The Contractor further agrees that acceptance by the Contractor of the final payment due under this contract, and the adjustment and payment of his/her bill rendered for any work done in accordance with any amendments of this Contract, shall be and shall operate as a release to the County of San Luis Obispo from any and all claims or liabilities on account of work performed under this Contract except claims or liabilities for which written notice of claim or protest has been filed with the Public Works Director. Besides guarantees required elsewhere, the Contractor shall and does hereby guarantee all workmanship and material for a period of one year from and after both the date of acceptance of the work and the recordation of the notice of completion by the County and shall repair or replace any or all work and material, together with any other portions of the work which may be displaced in so doing, that in the opinion of the County is or becomes defective during the period of said guarantee without expense whatsoever to the County.

ARTICLE 10 – CONTRACTOR’S REPRESENTATIONS

The Contractor hereby declares that he/she has read the Contract Documents pertaining to the work to be accomplished hereunder, has carefully examined the plans and detail drawings of the work to be performed and fully understands the intent and meaning of the same.

It is further stipulated and agreed that the Contractor shall keep himself/herself fully informed of all laws, ordinances, and regulations which do or may affect the conduct of the work, the materials used therein or persons engaged or employed thereupon and all such orders of bodies and tribunals having any jurisdiction over the same. If it be found that the Special Provisions or Standard Specifications for the work conflict with any such law, ordinance or regulation the Contractor shall immediately report same to the Public Works Director in writing. The Contractor shall at all times observe and comply with and shall cause all his/her agents, employees, and independent contractors hired by the Contractor to observe and comply with all such existing and future laws, ordinances, regulations, or decrees.

ARTICLE 11 – APPRENTICES

Attention is directed to the provisions in Sections 1777.5, 1777.6, and 1777.7 of the Labor Code concerning the employment of apprentices by the Contractor or any subcontractor.

The Contractor and any subcontractor shall comply with the requirements of Sections 1777.5, 1777.6, and 1777.7 of the Labor Code in the employment of apprentices.

To insure compliance and complete understanding of the law relating to apprentices, and specifically the required ratio thereunder, each contractor or subcontractor should, where some question exists, contact the Division of Apprenticeship Standards, 455 Golden Gate Avenue, San Francisco, California, or one of its branch offices prior to commencement of work on this contract. Responsibility for compliance with said Labor Code Sections lies with the prime contractor.

ARTICLE 12 – PAYROLL RECORDS

Attention is directed to the provisions in Section 1776 of the Labor Code concerning Contractor and subcontractor payroll records.

The Contractor and any subcontractor shall comply with the requirements of Section 1776 of the Labor Code.

ARTICLE 13 – EQUAL EMPLOYMENT OPPORTUNITY

During the performance of this contract, Contractor agrees to comply with all of the Equal Employment Opportunity provisions of Executive Order No. 11246 of September 24, 1965, as amended by Executive Order 11375 of October 13, 1967, and as supplemented in Department of Labor regulations (41 CFR Chapter 60), including the following:

1. The Contractor will not discriminate against any employee or applicant for employment because of race, color, religion, sex, or national origin. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment without regard to their race, color, religion, sex, or national origin. Such action shall include, but not be limited to the following: employment, upgrading, demotion or transfer, recruitment or recruitment advertising, layoffs or termination, rates of pay or other forms of compensation, and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided by the Department of Public Works setting forth the provisions of this nondiscrimination clause.
2. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, color, religion, sex, or national origin.
3. The Contractor will send to each labor union or representative of workers with which he/she has a collective bargaining agreement or other contract or understanding, a notice, to be provided by the Department of Public Works, advising the said labor union or worker's representative of the Contractor's commitments under this Article 14 and shall post copies of the Notice in conspicuous places available to employees and applicants for employment.
4. The Contractor will comply with all provisions of Executive Order 11246 of September 24, 1965, and of the rules, regulations (41 CFR, Part 60) and relevant orders of the Secretary of Labor.
5. The Contractor will furnish all information and reports required by Executive Order 11246 of September 24, 1965, and by rules, regulations, and orders of the Secretary of Labor, or pursuant thereto, and will permit access to his books, records, and accounts by the County of San Luis

Obispo and the Secretary of Labor for purposes of investigation to ascertain compliance with such rules, regulations, and orders.

6. In the event of the Contractor's noncompliance with the nondiscrimination clauses of this contract or with any of the said rules, regulations or orders, this contract may be cancelled, terminated or suspended in whole or in part and the Contractor may be declared ineligible for further government contracts or federally assisted construction contracts in accordance with procedures authorized in Executive Order 11246 of September 24, 1965, and such other sanctions may be imposed and remedies invoked as provided in Executive Order 11246 of September 24, 1965, or by rule, regulation or order of the Secretary of Labor, or as otherwise provided by law.
7. The Contractor will include the provisions of this Article 14 in every subcontract or purchase order unless exempted by rules, regulations, or orders of the Secretary of Labor issued pursuant to Section 204 of Executive Order 11246 of September 24, 1965, so that such provisions will be binding upon each subcontractor or vendor. The Contractor will take such action with respect to any subcontract or purchase order as the Public Works Director or the Secretary of Labor may direct as a means of enforcing such provisions including sanctions for noncompliance: provided, however, that in the event a contractor becomes involved in, or is threatened with litigation with a subcontractor or vendor as a result of such direction by the Secretary of Labor, the Contractor may request the United States to enter into such litigation to protect the interests of the United States.

ARTICLE 15 - SAFETY

All work conducted by the Contractor and/or subcontractors in the execution of this contract shall be in accordance with current CAL OSHA requirements. Full compensation for compliance with the provisions of this Article 15 shall be considered as included in the other items of work and no additional compensation will be allowed therefor.

ARTICLE 16 – BONDS

Contractor agrees that the Payment Bond and Performance Bond attached to this Agreement are for reference purposes only, and shall not be considered a part of this Agreement or any other Contract Document. Contractor further agrees that said bonds are separate obligations of the Contractor and its surety, and that any attorney's fee provision contained in any payment bond or performance bond shall not apply to any legal action between Contractor and County to enforce any provision of the Contract Documents.

ARTICLE 17 – ATTORNEYS FEES

No provisions of the Contract Documents provide either the Contractor or the County the right to be awarded any attorney's fees and/or costs under Civil Code section 1717 in any legal action brought by either party to enforce any provision of the Contract Documents against the other party. The parties agree that any references to attorney's fees in language describing indemnification obligations do not constitute a contractual provision that would provide either the Contractor or the County the right to be awarded any attorney's fees and/or costs under Civil Code section 1717 in any legal action brought by either party to enforce any provision of the Contract Documents against the other party. Any other language in the Contract Documents providing for a recovery of attorney's fees shall be

strictly construed as not including the recovery of any attorney's fees incurred by either Contractor or County in any legal action brought by either party to enforce any provision of the Contract Documents against the other party.

The parties agree that the Contract Documents contain no provisions that would allow either the Contractor or the County to be awarded attorney's fees and/or costs under Civil Code section 1717. Nothing in this Article affects any right by Contractor or County to recover attorney's fees or costs by operation of any law other than Civil Code section 1717.

In the event of any conflict between language in this Article and any other language in the Contract Documents, the language in this Article shall prevail.

IN WITNESS WHEREOF, the parties to these presents have hereunto set their hands the year and date first above written, being authorized thereto.

COUNTY OF SAN LUIS OBISPO

CONTRACTOR

By: _____
Chairperson of the Board of Supervisors
County of San Luis Obispo

ATTEST:

By: _____

Clerk of the Board of Supervisors
of the County of San Luis Obispo

Date: _____

By: _____
Deputy Clerk
County of San Luis Obispo

Printed Name and Title
(If Contractor is a corporation, a partnership,
or a joint venture, attach evidence of
authority to sign)

APPROVAL RECOMMENDED
PAAVO OGREN

By: PAAVO OGREN
Director of Public Works

By: _____

Date: 12/5/12

(Printed Name and Title)

APPROVED AS TO FORM AND
LEGAL EFFECT:

Date: _____

RITA L. NEAL
County Counsel
County of San Luis Obispo

Address for giving notices:

By: Rita L. Neal

Date: 12/5/12

PERFORMANCE BOND

KNOW ALL BY THESE PRESENTS: That

WHEREAS, the Board of Supervisors of the County of San Luis Obispo, State of California,
has awarded to _____

(hereinafter designated as "Principal") a contract for _____

_____ ; and

WHEREAS, said Principal is required under the terms of said contract to furnish a bond for
the faithful performance of said contract;

NOW, THEREFORE, we, the Principal and _____
_____, as Surety, are held and firmly bound unto

the County of San Luis Obispo, (hereinafter called "County"), in the penal sum of

(\$ _____), lawful money of the United States, for the payment of which sum well and
truly to be made, we bind ourselves, our heirs, executors, administrators and successors, jointly and
severally, firmly by these presents.

The condition of this obligation is such that if the above bounded Principal, his or its heirs,
executors, administrators, successors or assigns, shall in all things stand to and abide by, and well
and truly keep and perform the covenants, conditions and agreements in the said contract and any
alteration thereof made as therein provided, on his/her or their part, to be kept and performed at the
time and in the manner therein specified, and in all respects according to their true intent and

meaning, and shall indemnify and save harmless County, its officers, agents, and employees, as therein stipulated, then this obligation shall become null and void; otherwise it shall be and remain in full force virtue and effect.

And the said Surety, for value received, hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of the contract or to the work to be performed thereunder or the specifications accompanying the same shall in any manner affect its obligations on this bond, and it does hereby waive notice of any such change, extension of time, alteration, or additions to the terms of the contract or to the work or to the specifications.

In the event suit is brought upon this bond by County and judgment is recovered, Surety shall pay all costs incurred by County in such suit, including a reasonable attorney's fee to be fixed by the Court.

Death of the Principal shall not relieve Surety of its obligations hereunder.

IN WITNESS WHEREOF, one identical counterpart of this instrument, which shall for all purposes be deemed an original thereof, has been duly executed by Principal and Surety above named, on the

_____ day of _____, 20_____.

_____ (Seal)

_____ (Seal)

_____ (Seal)

Principal

_____ (Seal)

_____ (Seal)

_____ (Seal)

Surety

_____ Address

NOTE:

Signatures of those executing for Surety must be properly acknowledged.

PAYMENT BOND

KNOW ALL BY THESE PRESENTS:

WHEREAS, the Board of Supervisors of the County of San Luis Obispo, State of California,
and _____

_____ (hereinafter designated as "Principal") have
entered into an agreement for _____

which said Agreement, and all of the Contract Documents attached to or forming a part of said Agreement, are hereby referred to and made a part hereof; and

WHEREAS, pursuant to law, the Principal is required before entering upon the performance of the Work, to file a good and sufficient bond with the body by whom the contract is awarded, to secure claims to which reference is made in Sections 3247 through 3252, inclusive, of the Civil Code of California, and Sections 3181, 3110, 3111 and 3112 of the Civil Code of California,

NOW, THEREFORE, said Principal and the undersigned _____

as corporate surety, are held and firmly bound unto the County of San Luis Obispo, and unto all laborers, materialmen, and other persons referred to in said statutes in the sum of

_____ (\$_____), lawful money of the United States for the payment of which sum well and

truly made, we bind ourselves, our heirs, executors, administrators, successors, or assigns, jointly and severally by these presents.

The condition of this obligation is such that if the said Principal, his/her or its heirs, executors, administrators, successors or assigns, or subcontractors, shall fail to pay any of the persons named in Civil Code Section 3181, or amounts due under the Unemployment Insurance Code with respect to work or labor performed by any such claimant, or any amounts required to be deducted, withheld, and paid over to the Employment Development Department from the wages of employees of the Principal and his subcontractors pursuant to Section 13020 of the Unemployment Insurance Code, with respect to such work and labor, that the surety herein will pay for the same in an amount not exceeding the sum specified in this bond, otherwise the above obligation shall be void. In case suit is brought upon this bond, the said surety will pay a reasonable attorney's fee to be fixed by the court.

This bond shall inure to the benefit of any of the persons named in Civil Code Section 3181 as to give a right of action to such persons or their assigns in any suit brought upon this bond.

Should the condition of this bond be fully performed, then this obligation shall become null and void, otherwise it shall be and remain in full force, virtue, and effect.

And the said Surety, for value received, hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of the contract or to the work to be performed thereunder or the specifications accompanying the same shall in any manner affect its obligations on this bond, and it does hereby waive notice of any such change, extension of time, alteration, or additions to the terms of the contract or to the work or to the specifications.

Death of the Principal shall not relieve Surety of its obligations hereunder.

IN WITNESS WHEREOF one identical counterpart of this instrument, which shall for all purposes be deemed an original thereof, has been duly executed by the Principal and Surety above named, on the _____ day of _____, 20____.

_____ (Seal)

_____ (Seal)

_____ (Seal)

Principal

_____ (Seal)

_____ (Seal)

_____ (Seal)

Surety

_____ Address

NOTE:
Signatures of those executing for Surety must be properly acknowledged.

**COUNTY OF SAN LUIS OBISPO
DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION**

SPECIAL PROVISIONS

FOR

**VINEYARD DRIVE BIKE LANES
FROM BETHEL ROAD TO ASHTON WAY
IN TEMPLETON, CA
CONTRACT NO. 300437**

THIS PAGE LEFT BLANK INTENTIONALLY

CONTRACT NO. 300437

The Special Provisions contained herein have been prepared by or under the direction of the following registered engineer(s):

PREPARED BY:


DESIGN ENGINEER



DATE 12/5/12

RECOMMENDED FOR APPROVAL AND ADVERTISING BY:


DEPUTY PUBLIC WORKS DIRECTOR

DATE 12/5/12

APPROVED BY:


PUBLIC WORKS DIRECTOR

DATE 12/5/12

The Special Provisions contained herein have been prepared by or under the direction of the following registered engineer(s):

PREPARED BY:


PROJECT ENGINEER, CIVIL
(For Section 10 only)



11.14.12
DATE

SECTION 1. SPECIFICATIONS AND PLANS

1-1.01 SPECIFICATIONS AND PLANS

The work embraced herein shall be done in accordance with the Standard Specifications of the State of California, Department of Transportation, dated May 2006 (hereinafter called, "Standard Specifications"), the Standard Plans of the State of California, Department of Transportation, dated May 2006 (hereinafter called, "Standard Plans"), insofar as they may apply and in accordance with these Contract Documents. Wherever State Agencies, Departments, or Officers are referred to in the above mentioned Standard Specifications and Standard Plans, the comparable County of San Luis Obispo Agency, Department, or Officer having jurisdiction shall be meant thereby for the purpose of these Contract Documents.

The County hereby elects under Public Contract Code 20396 to have said applicable provisions of the Standard Specifications and Standard Plans referenced above, including those provisions modified by these Special Provisions, governed by the State Contract Act to the extent, and only to the extent, one or both of the following conditions is satisfied: (1) the applicable provisions of the Standard Specifications or Standard Plans expressly refer to the State Contract Act; or (2) the County would lack the authority to implement the applicable provisions of the Standard Specifications or Standard Plans absent the County's election to have the County's election to have the County's implementation of the provisions governed by the State Contract Act.

No amendment by the Department of Transportation to the Standard Specifications shall apply to these Contract Documents unless the amendment is expressly set forth in these Special Provisions.

In case of conflict between the Standard Specifications and the contract Special Provisions herein, the Special Provisions shall take precedence over such conflicting portions.

THIS PAGE LEFT BLANK INTENTIONALLY

SECTION 2. PROPOSAL REQUIREMENTS AND CONDITIONS

2-1.01 PROPOSAL REQUIREMENTS AND CONDITIONS

Attention is directed to the provisions in Section 2, “Proposal Requirements and Conditions,” of the Standard Specifications and these Special Provisions for the requirements and conditions which the bidder must observe in preparation and the submission of their bid.

The bidder's bond shall conform to the bond form in the section titled “Bid Proposal and Forms” of the Contract Documents and shall be properly filled out and executed. The bidder’s bond form included in the Contract Documents may be used.

The following provisions for Section 2, “Proposal Requirements and Conditions,” of the Standard Specifications are hereby modified as set forth hereafter.

Section 2-1.03, “Examination of Plans, Specifications, Contract, and Site of Work,” of the Standard Specifications is hereby amended by modifying the first sentence of the 4th paragraph to read: “Inspection of such records may be made at the Department of Public Works and Transportation of the County of San Luis Obispo.”

Section 2-1.05, “Proposal Forms” of the Standard Specifications, is hereby amended by substituting the words, “General and Special Provisions” for the words, “Proposal and Contract” in the first sentence of the 2nd paragraph and by substituting the words, “Notice to Bidders” for the words, “Notice to Contractors” in the first sentence of the 3rd paragraph. The 4th paragraph is hereby amended to read: “Proposal forms shall be obtained from the Department of Public Works and Transportation, County Government Center, San Luis Obispo, CA. 93408.” The 5th paragraph is hereby deleted.

Section 2-1.07, “Proposal Guaranty” of the Standard Specifications, is hereby amended by substituting the words, “made payable to the County of San Luis Obispo” for the words, “made payable to the Director of Transportation” in the first paragraph. The 2nd paragraph is hereby amended by adding the following sentence, “The provisions of the Public Contract Code § 10181 are applicable to this contract.” The first sentence of the last paragraph is hereby amended by substituting the words, “General and Special Provisions” for the words, “Proposal and Contract”. The last sentence of the last paragraph is hereby deleted.

Section 2-1.08, “Withdrawal of Proposals” of the Standard Specifications, is hereby amended by substituting the words, “Office of the Clerk of the Board of Supervisors of the County of San Luis Obispo” for the words, “Office Engineer, Division of Construction” in the first sentence. The last sentence is hereby amended by modifying it to read: “Any bid received at the Office of the Clerk of the Board of Supervisors of the County of San Luis Obispo after the date and

time specified in the Notice to Bidders shall not be considered and shall be returned to the bidder unopened nor may any bid be withdrawn after the time fixed in the public notice for the opening of bids.”

Section 2-1.105, “Previous Disqualification, Removal or Other Prevention of Bidding”, of the Standard Specifications, is hereby amended by deleting the first paragraph.

Section 2-1.108, “Compliance with Orders of the National Labor Relations Board”, of the Standard Specifications, is hereby amended by modifying the last paragraph to read: “The statement required by said Section 10232 is included in the section titled “Bid Proposal and Forms” of the Contract Documents.”

Section 2-1.11, “Ineligibility to Contract”, of the Standard Specifications is hereby amended by modifying the last paragraph to read: “A form for the statement required by Section 10285.1 is included in the section titled “Bid Proposal and Forms” of the Contract Documents.”

2-1.02 REQUIRED LISTING OF PROPOSED SUBCONTRACTORS

The designated subcontractors listed in the bidder's proposal shall list therein the name and address of all subcontractors to whom the bidder proposes to subcontract portions of the work in an amount in excess of 1/2 of one percent of the total bid, or in the case of bids for the construction of streets and highways, including bridges, in excess of 1/2 of the one percent or \$10,000, whichever is greater, in accordance with the Subletting and Subcontracting Fair Practices Act commencing with Section 4100 of the Public Contract Code. The bidder’s attention is invited to other provisions of said Act related to the imposition of penalties for a failure to observe its provisions by using unauthorized subcontractors or by making unauthorized substitutions.

The bidder shall complete and submit two “DESIGNATION OF SUBCOBTRACTORS” forms with bidder’s bid proposal in order to be considered responsive, one form for the Base Bid and one form for the Additive Bid Item.

SECTION 3. AWARD AND EXECUTION OF CONTRACT

3-1.01 AWARD OF CONTRACT

Attention is directed to the provisions of Section 3, “Award and Execution of Contract,” of the Standard Specifications and these Special Provisions for the requirements and conditions concerning award and execution of the contract.

The award of the contract, if it be awarded, will be to the responsible bidder with the lowest responsive bid price on the base bid without any consideration of any prices on the additive bid item. The County of San Luis Obispo has the option of adding the additive bid item after the lowest responsible bidder has been determined, and the bidder is bound by its bid amount for said additive item. Such award, if made, will be made within 45 calendar days after the opening of proposals, and bidder agrees to be bound by its bid, including all of its bid prices, for the entire 45 day period.

If the lowest responsible bidder refuses or fails to execute the contract, the Board of Supervisors of the County of San Luis Obispo may award the contract to the second lowest responsible bidder. Such award, if made, will be made within 75 calendar days after the opening of proposals. If the second lowest responsible bidder refuses or fails to execute the contract, the Board of Supervisors of the County of San Luis Obispo may award the contract to the third lowest responsible bidder. Such award, if made, will be made within 105 calendar days after the opening of proposals. The periods of time specified above within which the award of contract may be made shall be subject to extension for such further period as may be agreed upon in writing between the County of San Luis Obispo and the bidder concerned.

3-1.02 CONTRACT BONDS

The successful bidder shall furnish two (2) bonds:

1. The Payment bond to secure the claim payments of laborers, workers, mechanics, or materialmen providing goods, labor, or services under the contract. This bond shall be equal to one hundred percent (100%) of the base plus the additive bid item, if added by the County.
2. The Performance bond to guarantee the faithful performance of the contract. This bond shall be equal to one hundred percent (100%) of the base bid plus the additive bid item, if added by the County.

Forms for the two (2) required bonds are included in the section titled “Bid Proposal and Forms” of the Contract Documents.

Surety on said bonds must agree that death of the Contractor shall not relieve the surety of its obligation hereunder. The said surety, for the value received, must stipulate and agree that all alterations, extension of time, extra and additional work, and other changes authorized by these Specifications or any part of the

contract may be made without securing consent of the surety on the contract bonds, and such actions shall not in any way affect the obligations of the surety on the bonds.

Attention is directed to the provisions in Section 6-1.075, "Guarantee," of the Amendments to the Standard Specifications.

3-1.03 EXECUTION OF CONTRACT

The contract shall be signed by the successful bidder and returned, together with the contract bonds, copy of insurance policies, and Certificates of Insurance, with documents to verify any self insurance coverage within ten (10) calendar days, not including Saturdays, Sundays, and legal holidays, after the bidder has received the contract for execution.

The contract shall not be deemed executed by the successful bidder unless all of the above documents are received by the County with the signed contract within said time period. The bidder's security may be forfeited for failure to execute the contract within the time specified.

SECTION 4. PROSECUTION AND PROGRESS OF THE WORK

4-1.01 GENERAL

Attention is directed to the provisions in Section 8, "Prosecution and Progress," of the Standard Specifications and these Special Provisions.

The Contractor shall begin work within ten (10) working days from the date of receipt of the County's "Notice to Proceed."

This work shall be diligently prosecuted to completion before the expiration of 45 WORKING DAYS from the date of receipt of the County's "Notice to Proceed." The Contractor shall not begin work in advance of receiving the County's "Notice to Proceed."

4-1.02 LIQUIDATED DAMAGES

Attention is directed to Section 8-1.07, "Liquidated Damages," of the Standard Specifications and these Special Provisions.

It is agreed by the parties to the contract that in the case all the work called for under the contract in all parts and requirements is not finished or completed within the number of working days as set forth in these Special Provisions, damage will be sustained by the County of San Luis Obispo, and that it is and will be impractical and extremely difficult to ascertain and determine the actual damage which the County will sustain in the event of and by reason of such delay; and it is therefore agreed that the Contractor will pay to the County of San Luis Obispo the sum of ONE THOUSAND FIVE HUNDRED DOLLARS (\$1,500) per day for each and every calendar days delay in finishing the work in excess of the number of working days prescribed above as liquidated and agreed damages; and the Contractor agrees to pay said liquidated damages herein provided for, and further agrees that the County may deduct the amount thereof from any moneys due or that may become due the Contractor under the contract.

The language in Sections 10253 through 10260 of the Public Contract Code are incorporated herein by reference as though fully set forth herein (with the word "Director" therein construed to mean the Public Works Director); provided, however, that prequalification of bidders shall not be required, and any references in said sections to prequalification of bidders are hereby deleted.

4-1.03 CONTRACT SUBMITTALS

The Contractor shall submit the following to the Engineer within ten (10) calendar days, not including Saturdays, Sundays, and legal holidays, of the Contractor's receipt of the fully executed contract:

- Water Pollution Control Plan
- Recycling Plan

- Proposed Progress Schedule
- Identity of Project Safety Officer

The Contractor shall allow ten (10) days, not including Saturdays, Sundays, and legal holidays, for the Engineer's review. The Contractor shall revise and resubmit the submittal within 5 days, not including Saturdays, Sundays, and legal holidays, of receipt of the Engineer's comments. No claim will be allowed for damages or extensions of time because of delays in work resulting from rejection of the submittals or from revisions and resubmittal of the submittals. The number of working days within which the Contractor must complete the work under this contract shall be reduced by 1 working day for each day the Contractor fails to submit or resubmit the required submittal to the Engineer within the prescribed time allowances.

The Engineer's review and approval shall not waive any contract requirements and shall not relieve the Contractor from complying with Federal, State and local laws, regulations, and requirements. No claim will be allowed for damages or extensions of time because of delays in work resulting from any documents submitted by Contractor to any federal, state, or local agency that are determined by such agency to be incomplete or not in compliance with any applicable laws, regulations or requirements.

4-1.04 MANDATORY PRE-CONSTRUCTION CONFERENCE

Prior to the issuance of the "Notice to Proceed" a mandatory pre-construction conference will be held at the office of the Construction Engineer for the purpose of discussing with the Contractor the scope of work, contract drawings, specifications, existing conditions, materials to be ordered, equipment to be used, and all essential matters pertaining to the prosecution and the satisfactory completion of the project as required. The Contractor's representatives at this conference shall include major superintendents and shall include major subcontractors' representatives. So long as the County provides the Contractor at least 5 calendar days advance notice of the date and time of said conference. The number of working days within which the Contractor must complete the work under this contract shall be reduced by 1 working day for each day said conference is delayed by the Contractor's failure to attend the conference with the appropriate representatives.

A written record of attendance and items discussed will be made by the Engineer and a copy of the record kept in the Engineer's files. If for any reason a pre-construction conference is not held the Engineer will notify the Contractor in writing.

SECTION 5. GENERAL AND MISCELLANEOUS

5-1.01 DEFINITIONS AND TERMS

Attention is directed to the provisions in Section 1, “Definitions and Terms,” of the Standard Specifications with the modifications as set forth hereafter.

Section 1-1.13, “Department,” of the Standard Specifications is hereby amended to read: “The County of San Luis Obispo acting by and through its Department of Public Works and Transportation.”

Section 1-1.15, “Director,” of the Standard Specifications is hereby amended to read: “The Director of the Department of Public Works and Transportation of the County of San Luis Obispo.”

Section 1-1.18, “Engineer,” of the Standard Specifications is hereby amended to read: “Any duly authorized representative either employed by or contracting with the Department of Public Works and Transportation acting within the scope of the particular duties delegated to them.”

Section 1-1.19, “Engineer’s Estimate,” of the Standard Specifications is hereby amended to read: “The contract bid form indicating the approximate quantities of work to be performed as contained in the Bid Proposal.”

Section 1-1.26, “Liquidated Damages,” of the Standard Specifications is hereby amended to read: “The amount prescribed in Section 4, “Prosecution and Progress of the Work,” of the Special Provisions pursuant to Government Code Section 53069.85 to be paid to the County, or to be deducted from any payments due, or to become due, the Contractor for each day’s delay in completing the whole or any specified portion of work beyond the time allowed in the Contract Documents.”

Section 1-1.39, “State,” of the Standard Specifications is hereby amended to read: “The State of California and its political subdivision, the County of San Luis Obispo.”

Section 1-1.40, “State Contract Act,” of the Standard Specifications is hereby amended to read: “Only those sections or provisions of Chapter 1 of Part 2 of Division 2 of the Public Contract Code (Section 10100 et seq.) which are specifically incorporated into this contract are applicable to this contract. All other sections and provisions of Chapter 1 of Part 2 of Division 2 of the Public Contract Code are not applicable to this contract and do not constitute a part hereof.”

5-1.02 SCOPE OF WORK

Attention is directed to the provisions in Section 4, “Scope of Work,” of the Standard Specifications with the modifications as set forth hereafter.

Section 4-1.03B(1), "Increases of More Than 25 Percent," of the Standard Specifications is amended by adding the following sentence to the last paragraph: "Additionally, such written request by the Contractor shall be accompanied by adequate, detailed data to support actual costs incurred."

Section 4-1.03B(2), "Decreases of More Than 25 Percent," of the Standard Specifications is hereby amended by modifying the first sentence of the first paragraph to read: "Should the total pay quantity of any item of work required under the contract be less than 75 percent of the Engineer's Estimate therefor, the Engineer may reserve the right to make no adjustment in the corresponding unit price for that item if he/she so elects, except that an adjustment in compensation pursuant to this Section will be made if requested in writing by the Contractor. Additionally, such written request by the Contractor shall be accompanied by adequate, detailed data to support actual costs incurred."

Section 4-1.03D, "Extra Work," of the Standard Specifications is hereby amended by adding the following sentences to the 2nd paragraph: "All extra work shall be reported daily by the Contractor upon forms furnished by the Engineer, signed by both parties at the conclusion of each workday. Said daily extra work reports shall thereafter be considered the true record of the extra work performed and shall become the basis of payment therefor."

5-1.03 CONTROL OF WORK

Attention is directed to Section 5, "Control of Work," of the Standard Specifications with the modifications as set forth hereafter.

Section 5-1.07, "Lines and Grades," of the Standard Specifications is hereby amended to read: "Stakes or marks will be set by the Engineer as the Engineer determines to be necessary to establish the lines and grades required for the completion of the work specified in these specifications, on the plans, and in the Special Provisions.

When the Contractor requests stakes or marks to be set, the Contractor shall notify the Engineer of the request in writing no less than three (3) working days in advance of starting operations that require their use. The Contractor shall also submit to the Engineer for acceptance, a tentative schedule of all anticipated staking requests for the initial thirty (30) working days of the contract. The Engineer shall determine if the staking request schedule is reasonable before recognizing any requests for stakes or marks to be set. Said schedule shall correlate with any order of work specified in the Contract Special Provisions. If any vegetation needs to be cleared or grubbed, as determined by the Engineer, before stakes or marks can be set, then the Contractor shall clear the obstructing vegetation for the proper placement of stakes or marks. The Engineer and the Contractor shall agree on the extent of vegetation removal necessary to prepare the work site for the setting of stakes or marks. Vegetation removal for the preparation of the work site for the setting of stakes or marks shall be considered as included in the various items of work involved and no additional compensation will be allowed therefor. The Contractor will not be entitled to any

compensation for any perceived delay, nor entitled to an extension of time for any perceived delay without due cause for the period between when the work site is deemed cleared by the Engineer and when the stakes or marks are set for use by the Contractor.

Stakes and marks set by the Engineer shall be carefully preserved by the Contractor. In case the stakes and marks are destroyed or damaged, the stakes and marks will be replaced or restored at the Engineer's earliest convenience. The Contractor will be charged \$875.00 for each stake or mark replaced or restored which in the judgment of the Engineer had been carelessly or willfully destroyed or damaged by the Contractor's operations. This charge will be deducted from any moneys due or to become due the Contractor.”

Section 5-1.116, “Differing Site Conditions,” of the Amendments to the Standard Specifications is hereby amended by including the following language from Section 7104 of the Public Contract Code: “7104. Any public works contract of a local public entity which involves digging trenches or other excavations that extend deeper than four feet below the surface shall contain a clause which provides the following: (a) That the contractor shall promptly, and before the following conditions are disturbed, notify the public entity, in writing, of any: (1) Material that the contractor believes may be material that is hazardous waste, as defined in Section 25117 of the Health and Safety Code, that is required to be removed to a Class I, Class II, or Class III disposal site in accordance with provisions of existing law. (2) Subsurface or latent physical conditions at the site differing from those indicated. (3) Unknown physical conditions at the site of any unusual nature, different materially from those ordinarily encountered and generally recognized as inherent in work of the character provided for in the contract. (b) That the public entity shall promptly investigate the conditions, and if it finds that the conditions do materially so differ, or do involve hazardous waste, and cause a decrease or increase in the contractor's cost of, or the time required for, performance of any part of the work shall issue a change order under the procedures described in the contract. (c) That, in the event that a dispute arises between the public entity and the contractor whether the conditions materially differ, or involve hazardous waste, or cause a decrease or increase in the contractor's cost of, or time required for, performance of any part of the work, the contractor shall not be excused from any scheduled completion date provided for by the contract, but shall proceed with all work to be performed under the contract. The contractor shall retain any and all rights provided either by contract or by law which pertain to the resolution of disputes and protests between the contracting parties.”

5-1.04 PREVAILING WAGE

Attention is directed to the provisions in Section 7-1.01A(2), “Prevailing Wage,” of the Standard Specifications and these Special Provisions.

Pursuant to the provisions of Section 1773 of the California Labor Code, the Board of Supervisors of the County of San Luis Obispo has obtained from the Director of the California Department of Industrial Relations the general

prevailing rate of per diem wages and the general prevailing rate for holiday and overtime work for the locality in which the work is to be performed for each needed craft, classification, or type of workman. Copies of said prevailing rate of per diem wages are on file in the Office of the Clerk of the Board of Supervisors and available at the California Department of Industrial Relations' web site at:

www.dir.ca.gov/DLSR/PWD.

The wage rates determined by the Director of Industrial Relations refer to expiration dates. Prevailing wage determinations with a single asterisk after the expiration date are in effect on the date of advertisement for bids and are good for the life of the contract. Prevailing wage determinations with double asterisks after the expiration date indicate that the wage rate to be paid for work performed after this date has been determined. If work is to extend past this date, the new rate shall be paid and incorporated in the contract. The Contractor shall contact the Department of Industrial Relations as indicated in the wage rate determinations to obtain predetermined wage changes.

Pursuant to Section 1773.2 of the Labor Code, a copy of said general prevailing rates shall be posted by the Contractor in a prominent place at the site of the work.

Additionally, the Director of Industrial Relations has reserved the right to issue corrected wage determinations for certain crafts contained in the prevailing wage determinations applicable to this contract. These corrected prevailing wage rates shall apply to this contract in the same manner as if they had been published in the prevailing wage determinations applicable to this contract. These revisions to the general prevailing wage rates are on file at the Office of the Clerk of the Board of Supervisors and available at the California Department of Industrial Relations' web site at:

www.dir.ca.gov/DLSR/PWD.

Additionally, changes in general prevailing wage determinations which conform to Labor Code Section 1773.6 and Title 8 California Code of Regulations Section 16204 shall apply to the contract when issued by the Director of Industrial Relations at least ten (10) calendar days prior to the date of the Notice to Bidders for the project. Changes, if any, to the general prevailing wage rate will be on file at the Office of the Clerk of the Board of Supervisors and available at the California Department of Industrial Relations' web site at:

www.dir.ca.gov/DLSR/PWD.

5-1.05 PROGRESS SCHEDULE

Progress schedules will be required for this contract and shall conform to the provisions in Section 8-1.04, "Progress Schedules," of the Standard Specifications.

The Contractor shall submit to the Engineer a practicable progress schedule in conformance with the provisions in Section 4-1.03, "Contract Submittals," of these Special Provisions, and within 5 working days of the Engineer's written request at any other time.

5-1.06 PRESERVATION OF PROPERTY

Attention is directed to the provisions in Section 7-1.11, "Preservation of Property," of the Standard Specifications is hereby amended by adding the following to the end of the second paragraph: "Pursuant to Section 8771(b) of the California Business and Professions Code, existing survey monuments that control the location of subdivisions, tracts, boundaries, roads, streets, or highways, or provide survey control that are within or adjacent to the Contractor's operations, shall be located and referenced by or under the direction of a licensed land surveyor or registered civil engineer prior to the time when any streets, highways, other rights-of-way, or easements are improved, constructed, reconstructed, maintained, resurfaced, or relocated. In the event that any existing survey monument is disturbed in any way by the Contractor's operations as determined by a licensed land surveyor or registered civil engineer, they shall be reset accordingly and a corner record shall be filed with the county surveyor prior to the recording of a certificate of completion for the project. Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in locating existing survey monuments by or under the direction of a licensed land surveyor or registered civil engineer, resetting any disturbed survey monument and filing a corner record, shall be considered as included in the prices paid for the various contract items of work and no additional compensation will be allowed therefor."

5-1.07 MEASUREMENT AND PAYMENT

Attention is directed to the provisions in Section 9, "Measurement and Payment," of the Standard Specifications with the modifications as set forth hereafter.

The 13th paragraph of Section 9-1.01, "Measurement of Quantities," of the Standard Specifications shall be amended to read as follows: "Whenever pay quantities of materials are determined by weighing, the scales shall be operated by a weighmaster licensed in accordance with provisions of the California business and Professions Code, Division 5, Chapter 7. The contractor shall furnish a Public Weighmaster's certificate, or a private Weighmaster's certificate (load slip) with each load and a Daily Record of Platform Scale Weights. The Weighmaster's certificates shall be numbered consecutively to correspond with the Daily Record of Platform Scale Weights. The Daily Record of Platform Scale Weights shall be prepared using a form supplied by the County and shall be delivered to the Engineer at the end of each day. Contractor shall provide the County sufficient advance notice so as to enable a representative of the County to be present to witness the Weighing and check the Daily Record of Platform Scale Weights."

Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications is hereby amended by adding the following: "Additionally, the written notice of potential claim shall be submitted on Caltrans form CEM-6201 and shall be certified with reference to the California False Claims Act, Government Code Sections 12650-12655. The notice shall set forth the reasons for which the Contractor believes additional compensation will or may be due and the nature of the costs involved. Unless the amount of the potential claim has been stated in the written notice, the Contractor shall within 15 working days of submitting said notice, furnish an estimate of the cost of the affected work and impacts, if any, on project completion. Said estimate of costs may be changed or updated by the Contractor when conditions have changed. When the affected work is completed, the Contractor shall submit substantiation of actual costs. Failure to do so shall be sufficient cause for denial of any claim subsequently filed on the basis of said notice of potential claim.

Should the Contractor, in conjunction with or subsequent to the assertion of a potential claim, request inspection and copying of documents or records in the possession of the County that pertain to the potential claim, the Contractor shall make its records of the project, as deemed by the County to be pertinent to the potential claim, available to the County for inspection and copying."

Section 9-1.05, "Stop Notices," of the Standard Specifications is hereby amended by adding the following statement: "Stop notice information may be obtained from the Department of Public Works and Transportation."

Section 9-1.06, "Partial Payments," of the Standard Specifications is hereby amended by adding the following statement: "The Contractor will be required to certify each progress pay estimate. The certification will include the following Contractor Concurrence: By signing below, Contractor hereby attests that (1) it has reviewed the basis for the proposed payment amount set forth in this document; (2) any and all work relating to said proposed payment amount was performed by Contractor (or its Subcontractor(s)) in full compliance with the Contract Documents; and (3) the quantities and amounts shown herein accurately reflect the quantities and amounts of work for which the Contractor is presently entitled to payment under the Contract Documents."

Section 9-1.065, "Payment of Withheld Funds," of the Standard Specifications is hereby amended to read: "Attention is directed to Section 9-1.06, "Partial Payments," of the Standard Specifications, to these Special Provisions and in particular to the retention provisions therein.

Upon the Contractor's request, the County will make payment to the Contractor of funds withheld to ensure performance of this contract if the Contractor, in accordance with Public Contract Code Section 22300, deposits in escrow with the County, or with a state or federally chartered bank in California securities equivalent to the amount withheld. Securities eligible for investment under this section shall include bank or savings and loan certificates of deposit, the securities enumerated in Government Code Section 16430, interest bearing demand deposit accounts, standby letters of credit, or any other security mutually

agreed to by the Contractor and the County. Upon satisfactory completion of the contract, the securities shall be returned to the Contractor. Alternatively, the Contractor may request that the County make payment of retention earned directly to the escrow agent as provided in subdivision (b) of Section 22300 of the Public Contract Code.

Each of the following conditions shall apply to the deposit of securities into escrow:

- (a) The Contractor shall bear the expense of the County and the escrow agent (either the County or the bank) in connection with the escrow deposit made.
- (b) Securities or certificates of deposit to be placed in escrow shall be of a value at least equivalent to the amounts of retention to be paid to the Contractor pursuant to this section.
- (c) The value of any securities placed in escrow shall be based upon the market value of such securities as of the date the securities are deposited in escrow, and not upon the face value of the securities. Such securities shall be valued by the County, whose decision on valuation of the securities shall be final.
- (d) The escrow agreement shall provide that the escrow agent must convert the securities deposited therein for cash, in whole or in part, to meet the defaults by the Contractor upon a unilateral demand for such conversion by the Public Works Director, and further that any amount so demanded shall be paid to the County upon said unilateral demand for payment.
- (e) The Contractor shall be the beneficial owner of any securities substituted for moneys withheld and shall receive any interest thereon.
- (f) The Contractor shall enter into an escrow agreement satisfactory to the County, which agreement shall be substantially similar to the form set forth in Public Contract Code Section 22300. The Contractor shall obtain the written consent of the surety to such agreement. The Public Works Director is authorized to sign such escrow agreements on behalf of the County.

Section 9-1.07B, "Final Payments and Claims," of the Standard Specifications is hereby amended by deleting the introductory phrase "After acceptance by the Director," and inserting in its place the phrase: "After the Engineer makes a formal recommendation to the Director that the Public Works Department initiates the internal procedures that would allow the Board to accept the work at a future Board meeting,"

5-1.08 DETERMINATION OF DISPUTES

Public Contract Code Sections 10240 through 10245.4 shall not be applicable to this contract. Section 9-1.10, "Arbitration," of the Standard Specifications is hereby deleted. All disputes and claims arising under or by virtue of this contract shall be directed to and be determined by the Public Works Director. The Public

Works Director's determination of disputes and claims pursuant to these Special Provisions shall constitute the decision of the County.

The parties agree that to the extent Article 1.5 of the Public Contract Code (Public Contract Code Section 20104 et seq) is applicable to any claims made under this contract, nothing in Article 1.5 excuses Contractor's compliance with the claim procedures set forth in the Standard Specifications (as amended by these Contract Documents). Nothing in Article 1.5 extends the time limit or supercedes the notice requirements set forth in the Standard Specifications (as amended by these Contract Documents). The parties mutually agree that all information required of the Contractor under said Standard Specifications (as amended by these Contract Documents) is hereby incorporated into the requirements of Article 1.5.

Article 1.5 (commencing with Section 20104) of Chapter 1 of Part 3 of Division 2 of the Public Contract Code provides as follows:

Article 1.5 Resolution of Construction Claims

20104. (a) (1) This article applies to all public works claims of three hundred seventy-five thousand dollars (\$375,000) or less which arise between a contractor and a local agency. (2) This article shall not apply to any claims resulting from a contract between a contractor and a public agency when the public agency has elected to resolve any disputes pursuant to Article 7.1 (commencing with Section 10240) of Chapter 1 of Part 2.

(b) (1) "Public work" has the same meaning as in Sections 3100 and 3106 of the Civil Code, except that "public work" does not include any work or improvement contracted for by the state or the Regents of the University of California. (2) "Claim" means a separate demand by the Contractor for (A) a time extension, (B) payment of money or damages arising from work done by, or on behalf of, the Contractor pursuant to the contract for a public work and payment of which is not otherwise expressly provided for or the claimant is not otherwise entitled to, or (C) an amount the payment of which is disputed by the local agency.

(c) The provisions of this article or a summary thereof shall be set forth in the plans or specifications for any work which may give rise to a claim under this article.

(d) This article applies only to contracts entered into on or after January 1, 1991.

20104.2. For any claim subject to this article, the following requirements apply:

(a) The claim shall be in writing and include the documents necessary to substantiate the claim. Claims must be filed on or before the date of final payment. Nothing in this subdivision is intended to extend the time limit or supersede notice requirements otherwise provided by contract for the filing of claims.

(b) (1) For claims of less than fifty thousand dollars (\$50,000), the local agency shall respond in writing to any written claim within 45 days of receipt of the claim, or may request, in writing, within 30 days of receipt of the claim, any additional documentation supporting the claim or relating to defenses to the claim the local agency may have against the claimant. (2) If additional information is thereafter required, it shall be requested and provided pursuant to this subdivision, upon mutual agreement of the local agency and the claimant. (3) The local agency's written response to the claim, as further documented, shall be submitted to the claimant within 15 days after receipt of the further documentation or within a period of time no greater than that taken by the claimant in producing the additional information, whichever is greater.

(c) (1) For claims of over fifty thousand dollars (\$50,000) and less than or equal to three hundred seventy-five thousand dollars (\$375,000), the local agency shall respond in writing to all written claims within 60 days of receipt of the claim, or may request, in writing, within 30 days of receipt of the claim, any additional documentation supporting the claim or relating to defenses to the claim the local agency may have against the claimant. (2) If additional information is thereafter required, it shall be requested and provided pursuant to this subdivision, upon mutual agreement of the local agency and the claimant. (3) The local agency's written response to the claim, as further documented, shall be submitted to the claimant within 30 days after receipt of the further documentation, or within a period of time no greater than that taken by the claimant in producing the additional information or requested documentation, whichever is greater.

(d) If the claimant disputes the local agency's written response, or the local agency fails to respond within the time prescribed, the claimant may so notify the local agency, in writing, either within 15 days of receipt of the local agency's response or within 15 days of the local agency's failure to respond within the time prescribed, respectively, and demand an informal conference to meet and confer for settlement of the issues in dispute. Upon a demand, the local agency shall schedule a meet and confer conference within 30 days for settlement of the dispute.

(e) Following the meet and confer conference, if the claim or any portion remains in dispute, the claimant may file a claim as provided in Chapter 1 (commencing with Section 900) and Chapter 2 (commencing with Section 910) of Part 3 of Division 3.6 of Title 1 of the Government Code. For purposes of those provisions, the running of the period of time within which a claim must be filed shall be tolled from the time the claimant submits his or her written claim pursuant to subdivision (a) until the time that claim is denied as a result of the meet and confer process, including any period of time utilized by the meet and confer process.

(f) This article does not apply to tort claims and nothing in this article is intended nor shall be construed to change the time periods for filing tort claims or actions specified by Chapter 1 (commencing with Section 900) and Chapter 2

(commencing with Section 910) of Part 3 of Division 3.6 of Title 1 of the Government Code.

20104.4. The following procedures are established for all civil actions filed to resolve claims subject to this article:

(a) Within 60 days, but no earlier than 30 days, following the filing or responsive pleadings, the court shall submit the matter to nonbinding mediation unless waived by mutual stipulation of both parties. The mediation process shall provide for the selection within 15 days by both parties of a disinterested third person as mediator, shall be commenced within 30 days of the submittal, and shall be concluded within 15 days from the commencement of the mediation unless a time requirement is extended upon a good cause showing to the court or by stipulation of both parties. If the parties fail to select a mediator within the 15-day period, any party may petition the court to appoint the mediator.

(b) (1) If the matter remains in dispute, the case shall be submitted to judicial arbitration pursuant to Chapter 2.5 (commencing with Section 1141.10) of Title 3 of Part 3 of the Code of Civil Procedure, notwithstanding Section 1141.11 of that code. The Civil Discovery Act of 1986 (Article 3 (commencing with Section 2016) of Chapter 3 of Title 3 of Part 4 of the Code of Civil Procedure) shall apply to any proceeding brought under this subdivision consistent with the rules pertaining to judicial arbitration. (2) Notwithstanding any other provision of law, upon stipulation of the parties, arbitrators appointed for purposes of this article shall be experienced in construction law, and, upon stipulation of the parties, mediators, and arbitrators shall be paid necessary and reasonable hourly rates of pay not to exceed their customary rate, and such fees and expenses shall be paid equally by the parties, except in the case of arbitration where the arbitrator, for good cause, determines a different division. In no event shall these fees or expenses be paid by state or county funds. (3) In addition to Chapter 2.5 (commencing with Section 1141.10) of Title 3 of Part 3 of the Code of Civil Procedure, any party who after receiving an arbitration award requests a trial de novo but does not obtain a more favorable judgment shall, in addition to payment of costs and fees under that chapter, pay the attorney's fees of the other party arising out of the trial de novo.

(c) The court may, upon request by any party, order any witnesses to participate in the mediation or arbitration process.

20104.6. (a) No local agency shall fail to pay money as to any portion of a claim which is undisputed except as otherwise provided in the contract.

(b) In any suit filed under Section 20104.4, the local agency shall pay interest at the legal rate on any arbitration award or judgment. The interest shall begin to accrue on the date the suit is filed in a court of law.

5-1.09 AUDIT OF RECORDS

The Contractor shall maintain and make available for examination and audit by the State Auditor General and/or duly authorized representatives of the State, County, or Federal Governments, all books, papers, accounting records, and other documents pertaining to the cost and performance of this contract.

The Contractor shall retain said books, papers, accounting records, and other documents for a period of three years after the date of final payment under this contract (Government Code Section 8546.7).

5-1.10 CONTRACTOR'S REPORTS

The Contractor shall complete a daily report indicating location worked, total manpower per construction trade for each task, major equipment on site, each subcontractor's manpower and equipment, weather conditions, and other related information involved in the performance of the work. The daily report shall be completed on forms furnished by the Engineer and shall be submitted to the Engineer at the conclusion of each workday. The report shall comment on the daily progress and status of the work within each major component of the work.

5-1.11 REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES

When the presence of asbestos or hazardous substances are not shown on the plans or indicated in the specifications and the Contractor encounters materials which the Contractor reasonably believes to be asbestos or a hazardous substance as defined in Section 25914.1 of the Health and Safety Code, and the asbestos or hazardous substance has not been rendered harmless, the Contractor may continue work in unaffected areas reasonably believed to be safe. The Contractor shall immediately cease work in the affected area and report the condition to the Engineer in writing.

In conformance with Section 25914.1 of the Health and Safety Code, removal of asbestos or hazardous substances including exploratory work to identify and determine the extent of the asbestos or hazardous substance will be performed by separate contract.

If delay of work in the area delays the current controlling operation, the delay will be considered a right of way delay and the Contractor will be compensated for the delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

5-1.12 SUBCONTRACTING

No subcontract releases the Contractor from the contract or relieves the Contractor of their responsibility for a subcontractor's work.

If the Contractor violates Public Contract Code §4100 et seq., the County may exercise the remedies provided under violates Public Contract Code §4100. The

County may refer the violation to the Contractors State License Board as provided under Public Contract Code §4111.

The Contractor shall perform work equaling at least 30 percent of the value of the original total bid with the Contractor's own employees and equipment, owned or rented, with or without operators.

Each subcontract shall comply with the contract.

Each subcontractor shall have an active and valid State contractor's license with a classification appropriate for the work to be performed (Business and Professions Code, §7000 et seq.).

The Contractor shall submit copies of subcontracts upon request by the Engineer.

The Contractor shall submit a Subcontracting Request form prior to commencement of that portion of the work.

The Contractor shall not use a debarred subcontractor. Pursuant to the provisions in Section 1777.1 of the Labor Code, the Labor Commissioner publishes and distributes a list of contractors ineligible to perform work as a subcontractor on a public works project. This list of debarred contractors is available from the Department of Industrial Relations web site at:

<http://www.dir.ca.gov/DLSE/Debar.html>.

Upon request by the Engineer, the Contractor shall immediately remove and not again use a subcontractor who fails to prosecute the work satisfactorily.

5-1.13 CONSTRUCTION SUBMITTALS

Construction project submittals, including shop drawings and manufacturer's product specifications, shall be supplied for all material, equipment items, and for other items of work required by its contract documents. The Contractor shall supply 5 copies of manufacturer's scaled, dimensioned shop drawings complete with all information required to describe the item and demonstrate compliance with contract drawings and these specifications. Submittals will only be accepted from the Contractor (not sub-contractor or material supplier). Neither fabrication nor onsite preparation shall be started before receipt of written review from the County.

Each submittal shall be sequentially numbered, dated, and appropriately titled with the specification number and description.

The Contractor's responsibility for errors, omissions, and deviations from the requirements of the contract documents in submittals is not relieved by the County's review. The Contractor shall be responsible for confirming and correlating all quantities and dimensions, the compatibility of different components, selecting fabrication processes and techniques of construction, coordinating its work with that of other trades or other contractors at the site, and

performing its work in a safe and satisfactory manner. The County will require 10 working days for submittal review. No claim will be allowed for damages or extensions of time because of delays in work resulting from rejection of material or from revisions and resubmittal of shop drawings, project data, or samples.

Resubmittals will be reviewed and returned in the same review period as the original submittals. It is considered reasonable that the Contractor shall make a complete and acceptable submittal by the second submission. The Engineer reserves that right to withhold monies due to the Contractor to cover additional costs of any review beyond the second submittal. Full compensation for preparing submittals and shop drawings, as required, shall be considered as included in the contract items of work involved and no additional compensation will be allowed therefor.

5-1.14 MEANS AND METHODS

The Engineer will not have control over, be in charge of, nor be responsible for construction means, methods, techniques, sequences, or procedures, or for the safety precautions and programs in connection with the work, since these are solely Contractor's responsibility, unless otherwise required by the Contract Documents.

5-1.15 LEGAL ADDRESS OF THE CONTRACTOR

Both the address given in the proposal and the Contractor's office in the vicinity of the work are hereby designated as places to either of which drawings, letters, notices, or other articles or communications to the Contractor may be mailed, transmitted electronically, or delivered. The mailing, electronic transmission, or delivery at either of these places shall be deemed sufficient notice thereof upon the Contractor.

Nothing herein contained shall be deemed to preclude the service of any drawing, letter, notice, article, or communication to, or upon, the Contractor or Contractor's representative personally. The address named in the proposal may be changed at any time by written notice from the Contractor to the Engineer.

5-1.16 WEEKLY PROGRESS MEETINGS

Weekly meetings shall be held at the project site to review the progress of the work and to discuss any problems which may have occurred. Meeting shall include the Engineer, inspectors, and the Contractor's foreman. The Contractor shall provide an updated schedule at the weekly meeting.

Full compensation for preparing updated schedules and attending the progress meetings, as required, shall be considered as included in the contract items of work involved and no additional compensation will be allowed therefor.

5-1.17 GOVERNMENT CODE CLAIM REQUIREMENTS

Nothing in these Contract Documents shall excuse a Contractor from fully complying with the requirements of Part 3 of division 3.6 of Title 1 of the Government Code (commencing with section 900). Said requirements must be complied with before filing any claim in any court of law, and are in addition to the other claims procedures set forth in the Contract Documents shall be considered a substitute or alternative procedure for complying with the requirements of Part 3 of Division 3.6 of Title 1 of the Government Code (commencing with section 900.)

5-1.18 SURFACE MINING AND RECLAMATION ACT

Imported borrow or aggregate material must come from a surface mine permitted under the Surface Mining and Reclamation Act of 1975 (SMARA), Pub Res Code § 2710, et seq., or from an exempt site.

The Department of Conservation, Office of Mine Reclamation maintains a list of permitted mine sites. For the list of permitted sites, go to:

http://www.conservation.ca.gov/omr/ab_3098_list

If Contractor obtains import borrow or aggregate material from a surface mine not on this list, Contractor shall submit written proof the mine is exempt from SMARA to the Engineer.

5-1.19 FAIR EMPLOYMENT AND HOUSING ACT

A portion of the funding for this project has been provided by the State of California, acting by and through the Department of Transportation (“STATE”) through agreement with the County, and as part of the requirements for receiving funding, the County has agreed to require inclusion of the nondiscrimination and compliance provisions of this section in all contracts and subcontracts to perform work under the funding agreement.

The Contractor and all subcontractors shall comply with the provisions of the Fair Employment and Housing Act (Gov. Code § 1290-0 et seq.), and the applicable regulations promulgated thereunder (Cal. Code Regs. Title 2, §7285.0, et seq.) The applicable regulations of the Fair Employment and Housing Commission Implementing Government Code, section I 2900(a-f), set forth in Chapter 5 of Division 4 of Title 2 of the California Code of Regulations are incorporated herein by reference and made a part hereof as if set forth in full. The Contractor and all subcontractors shall give written notice of their obligations under these Special Provisions to labor organizations with which they have a collective bargaining or other agreements, as appropriate.

The Contractor shall permit access to the records of employment, employment advertisements, application forms, and other pertinent data and records by State Fair Employment and Housing Commission, or any other agency of the State of

California designated by State Fair Employment and Housing Commission, for purposes of investigation to ascertain compliance with these Special Provisions.

For willful violation of this Fair Employment Provision, the STATE has the right to terminate their funding agreement with the County, either in whole or in part. In such event, the surety under the Contractor’s Performance Bond shall be liable for loss or damage sustained by the County and the STATE in securing the goods or services under this contract.

5-1.20 SOLID WASTE MANAGEMENT

For the purpose of complying with San Luis Obispo County Code, Title 8, Health and Sanitation, Chapter 8.12, , “Solid Waste Management,” the Contractor shall recycle at least 50% of the construction and demolition waste generated by the project.

The following is a list of IWMA-Certified Recycling Facilities:

C&D Recycling Facility at Cold Canyon Landfill	805-549-8332
C&D Recycling Facility at Chicago Grade Landfill	805-466-2985
North SLO County Recycling	805-434-0043
API (roll-off/debris box company)	805-928-8689
R&R (a roll-off/debris box company)	805-929-8000
Recycling Facility at the Paso Robles Landfill	805-238-2028
Santa Maria Transfer Station	805-922-9255
Bedford Enterprises/SMART	805-922-4977

The Contractor shall complete and sign the “RECYCLING PLAN” form in conformance with the provisions in Section 4-1.03, “Contract Submittals,” of these Special Provisions. This form must be submitted and approved prior to receiving the Notice to Proceed.

This form must show how at least 50% of the project construction and demolition waste will be recycled.

The Contractor shall maintain receipts or other documentation for any facility or site that received waste from the project.

The Contractor shall submit a complete and accurate “DISPOSAL REPORT” form with original receipts and supporting documentation. This form must be submitted and approved prior to receiving the Notice of Completion.

If the Contractor fails to submit the required information showing the 50% recycling goal was met, the County could impose a penalty equal to 2 percent of the total contract amount.

Full compensation for complying with these requirements shall be considered as included in the prices paid for the various items of work generating such construction and demolition waste and no additional compensation will be allowed therefor.

The following are copies of the “RECYCLING PLAN” and “DISPOSAL REPORT” forms:

RECYCLING PLAN FOR COUNTY PROJECTS

SECTION 1. PROJECT INFORMATION			
Contract Title	Contractor Name		
	Contractor Phone	Contractor Fax	
Contract Number	Street Address		
Total Contract Amount	City, State, Zip		
Print Name and Title	Signature		Date
SECTION 2. RECYCLING PLAN			
	Before Construction (estimated tons)		
	Landfill (Tons)	Recycling Facility (Tons)	Reuse (Tons)
Materials	Location	Location	Location
Cleared Vegetation			
Asphalt Concrete			
Concrete			
Metals (including spent equipment)			
Lumber			
Drywall			
Mixed Recyclables			
Trash			
Totals			
% Diversion			
Official Use Only			
Recycling Plan Approved <input type="checkbox"/>	Recycling Plan Denied <input type="checkbox"/>		
Information Required:			
Print Name and Title	Signature		Date

DISPOSAL REPORT FOR COUNTY PROJECTS

SECTION 1. PROJECT INFORMATION	
Contract Title	Contractor Name
Contract Number	Contractor Phone
Total Contract Amount	Contractor Fax
Street Address	
City, State, Zip	
<p>Contractor Certification: I certify under penalty of perjury that the information provided in this form is complete and accurate.</p>	
Print Name and Title	Signature
	Date
SECTION 2. DISPOSAL REPORT	
After Construction (actual tons)	
Materials	Landfill (Tons)
Cleared Vegetation	Recycling Facility (Tons)
Asphalt Concrete	Location
Concrete	Location
Metals (including spent equipment)	Reuse
Lumber	(Tons)
Drywall	Location
Mixed Recyclables	Location
Trash	Location
Totals	
% Diversion	
<p>I have reviewed and approved the information submitted in this report for completeness</p>	
Resident Engineer's Name:	Signature:
	Date:
Official Use Only	
Disposal Report Approved <input type="checkbox"/>	Disposal Report Denied <input type="checkbox"/>
Information Required	
Print Name and Title	Signature
	Date

SECTION 6. (*BLANK*)

SECTION 7. (*BLANK*)

SECTION 8. MATERIALS

8-1.01 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS

The Department maintains the following list of Prequalified and Tested Signing and Delineation Materials. The Engineer shall not be precluded from sampling and testing products on the list of Prequalified and Tested Signing and Delineation Materials.

The manufacturer of products on the list of Prequalified and Tested Signing and Delineation Materials shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each type of traffic product supplied.

For those categories of materials included on the list of Prequalified and Tested Signing and Delineation Materials, only those products shown within the listing may be used in the work. Other categories of products, not included on the list of Prequalified and Tested Signing and Delineation Materials, may be used in the work provided they conform to the requirements of the Standard Specifications.

Materials and products may be added to the list of Prequalified and Tested Signing and Delineation Materials if the manufacturer submits a New Product Information Form to the New Product Coordinator at the Transportation Laboratory. Upon a Departmental request for samples, sufficient samples shall be submitted to permit performance of required tests. Approval of materials or products will depend upon compliance with the specifications and tests the Department may elect to perform.

PAVEMENT MARKERS, PERMANENT TYPE

Retroreflective With Abrasion Resistant Surface (ARS)

1. Apex, Model 921AR (4" x 4")
2. Ennis Paint, Models C88 (4" x 4"), 911 (4" x 4") and C80FH
3. Ray-O-Lite, Models "AA" ARC II (4" x 4") and ARC Round Shoulder (4" x 4")
4. 3M Series 290 (3.5" x 4")
5. 3M Series 290 PSA
6. Glowlite, Inc Model 988AR (4" x 4")

Retroreflective With Abrasion Resistant Surface (ARS)

(for recessed applications only)

1. Ennis Paint, Model 948 (2.3" x 4.7")
 2. Ennis Paint, Model 944SB (2" x 4")*
 3. Ray-O-Lite, Model 2002 (2" x 4.6")
 4. Ray-O-Lite, Model 2004 (2" x 4")*
- *For use only in 4.5 inch wide (older) recessed slots

Non-Reflective, 4-inch Round

1. Apex Universal (Ceramic)
2. Apex Universal, Models 929 (ABS) and 929PP (Polypropylene)
3. Glowlite, Inc. (Ceramic) and PP (Polypropylene)

4. Hi-Way Safety, Inc., Models P20-2000W and 2001Y (ABS)
5. Interstate Sales, "Diamond Back" (Polypropylene)
6. Novabrite Models Cdot (White) Cdot-y (Yellow), Ceramic
7. Novabrite Models Pdot-w (White) Pdot-y (Yellow), Polypropylene
8. Three D Traffic Works TD10000 (ABS), TD10500 (Polypropylene)

PAVEMENT MARKERS, TEMPORARY TYPE

Temporary Markers For Long Term Day/Night Use (180 days or less)

1. Vega Molded Products "Temporary Road Marker" (3" x 4")
2. Filtrona Extrusion, Halftrack model 25, 26 and RPM 35

Temporary Markers For Short Term Day/Night Use (14 days or less)

(For seal coat or chip seal applications, clear protective covers are required)

1. Apex Universal, Model 932
2. Filtrona Extrusion, Models T.O.M., T.R.P.M., and "HH" (High Heat)
3. Hi-Way Safety, Inc., Model 1280/1281
4. Glowlite, Inc., Model 932

STRIPING AND PAVEMENT MARKING MATERIAL

Permanent Traffic Striping and Pavement Marking Tape

1. Advanced Traffic Marking, Series 300 and 400
2. Brite-Line, Series 1000
3. Brite-Line, "DeltaLine XRP"
4. Swarco Industries, "Director 35" (For transverse application only)
5. Swarco Industries, "Director 60"
6. 3M, "Stamark" Series 380 and 5730
7. 3M, "Stamark" Series 420 (For transverse application only)

Temporary (Removable) Striping and Pavement Marking Tape (180 days or less)

1. Advanced Traffic Marking, Series 200
2. Brite-Line, Series 100
3. Garlock Rubber Technologies, Series 2000
4. P.B. Laminations, Aztec, Grade 102
5. Swarco Industries, "Director-2"
6. Trelleborg Industries, R140 Series
7. 3M Series 620 "CR", and Series A750
8. 3M Series A145, Removable Black Line Mask
(Black Tape: for use only on Hot mix asphalt surfaces)
9. Advanced Traffic Marking Black "Hide-A-Line"
(Black Tape: for use only on Hot mix asphalt surfaces)
10. Brite-Line "BTR" Black Removable Tape
(Black Tape: for use only on Hot mix asphalt surfaces)
11. Trelleborg Industries, RB-140
(Black Tape: for use only on Hot mix asphalt surfaces)

Preformed Thermoplastic (Heated in place)

1. Flint Trading Inc., "Hot Tape"
2. Flint Trading Inc., "Premark Plus"

3. Ennis Paint Inc., "Flametape"

Ceramic Surfacing Laminate, 6" x 6"

1. Highway Ceramics, Inc.

CLASS 1 DELINEATORS

One Piece Driveable Flexible Type, 66-inch

1. Filtrona Extrusion, "Flexi-Guide Models 400 and 566"
2. Carsonite, Curve-Flex CFRM-400
3. Carsonite, Roadmarker CRM-375
4. FlexStake, Model 654 TM
5. GreenLine Model CGD1-66

Special Use Type, 66-inch

1. Filtrona Extrusion, Model FG 560 (with 18-inch U-Channel base)
2. Carsonite, "Survivor" (with 18-inch U-Channel base)
3. Carsonite, Roadmarker CRM-375 (with 18-inch U-Channel base)
4. FlexStake, Model 604
5. GreenLine Model CGD (with 18-inch U-Channel base)
6. Impact Recovery Model D36, with #105 Driveable Base
7. Safe-Hit with 8-inch pavement anchor (SH248-GP1)
8. Safe-Hit with 15-inch soil anchor (SH248-GP2) and with 18-inch soil anchor (SH248-GP3)

Surface Mount Type, 48-inch

1. Bent Manufacturing Company, Masterflex Model MFEX 180-48
2. Carsonite, "Channelizer"
3. FlexStake, Models 704, 754 TM, and EB4
4. Impact Recovery Model D48, with #101 Fixed (Surface-Mount) Base
5. Three D Traffic Works "Channelflex" ID No. 522248W

CHANNELIZERS

Surface Mount Type, 36-inch

1. Bent Manufacturing Company, Masterflex Models MF-360-36 (Round) MF-180-36 (Flat) and MFEX 180—36
2. Filtrona Extrusion, Flexi-Guide Models FG300PE, FG300UR, and FG300EFX
3. Carsonite, "Super Duck" (Round SDR-336)
4. Carsonite, Model SDCF03601MB "Channelizer"
5. FlexStake, Models 703, 753 TM, and EB3
6. GreenLine, Model SMD-36
7. Hi-way Safety, Inc. "Channel Guide Channelizer" Model CGC36
8. Impact Recovery Model D36, with #101 Fixed (Surface-Mount) Base
9. Safe-Hit, Guide Post, Model SH236SMA and Dura-Post, Model SHL36SMA
10. Three D Traffic Works "Boomerang" 5200 Series

Lane Separation System

1. Filtrona Extrusion, "Flexi-Guide (FG) 300 Curb System"

2. Qwick Kurb, "Klemmfix Guide System"
3. Dura-Curb System
4. Tuff Curb

CONICAL DELINEATORS, 42-inch

(For 28-inch Traffic Cones, see Standard Specifications)

1. Bent Manufacturing Company "T-Top"
2. Plastic Safety Systems "Navigator-42"
3. TrafFix Devices "Grabber"
4. Three D Traffic Works "Ringtop" TD7000, ID No. 742143
5. Three D Traffic Works, TD7500
6. Work Area Protection Corp. C-42

OBJECT MARKERS

Type "K", 18-inch

1. Filtrona Extrusion, Model FG318PE
2. Carsonite, Model SMD 615
3. FlexStake, Model 701 KM
4. Safe-Hit, Model SH718SMA

Type "Q" Object Markers, 24-inch

1. Bent Manufacturing "Masterflex" Model MF-360-24
2. Filtrona Extrusion, Model FG324PE
3. Carsonite, "Channelizer"
4. FlexStake, Model 701KM
5. Safe-Hit, Models SH824SMA_WA and SH824GP3_WA
6. Three D Traffic Works ID No. 531702W and TD 5200
7. Three D Traffic Works ID No. 520896W

CONCRETE BARRIER MARKERS AND TEMPORARY RAILING (TYPE K) REFLECTORS

Impactable Type

1. ARTUK, "FB"
2. Filtrona Extrusion, Models PCBM-12 and PCBM-T12
3. Duraflex Corp., "Flexx 2020" and "Electriflexx"
4. Hi-Way Safety, Inc., Model GMKRM100
5. Plastic Safety Systems "BAM" Models OM-BARR and OM-BWAR
6. Three D Traffic Works "Roadguide" Model TD 9300

Non-Impactable Type

1. ARTUK, JD Series
2. Plastic Safety Systems "BAM" Models OM-BITARW and OM-BITARA
3. Vega Molded Products, Models GBM and JD
4. Plastic Vacuum Forming, "Cap-It C400"

METAL BEAM GUARD RAIL POST MARKERS

(For use to the left of traffic)

1. Filtrona Extrusion, "Mini" (3" x 10")
2. Creative Building Products, "Dura-Bull, Model 11201"
3. Duraflex Corp., "Railrider"
4. Plastic Vacuum Forming, "Cap-It C300"

CONCRETE BARRIER DELINEATORS, 16-inch

(For use to the right of traffic)

1. Filtrona Extrusion, Model PCBM T-16
2. Safe-Hit, Model SH216RBM
3. Three D Traffic Works "Roadguide" Model 9400

CONCRETE BARRIER-MOUNTED MINI-DRUM (10" x 14" x 22")

1. Stinson Equipment Company "SaddleMarker"

GUARD RAILING DELINEATOR

(Place top of reflective element at 48 inches above plane of roadway)

Wood Post Type, 27-inch

1. Filtrona Extrusion, FG 427 and FG 527
2. Carsonite, Model 427
3. FlexStake, Model 102 GR
4. GreenLine GRD 27
5. Safe-Hit, Model SH227GRD
6. Three D Traffic Works "Guardflex" TD9100
7. New Directions Mfg, NDM27

Steel Post Type

1. Carsonite, Model CFGR-327

RETROREFLECTIVE SHEETING

Channelizers, Barrier Markers, and Delineators

1. Avery Dennison T-6500 Series (For rigid substrate devices only)
2. Avery Dennison WR-7100 Series
3. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
4. Reflexite, PC-1000 Metalized Polycarbonate
5. Reflexite, AC-1000 Acrylic
6. Reflexite, AP-1000 Metalized Polyester
7. Reflexite, Conformalight, AR-1000 Abrasion Resistant Coating
8. 3M, High Intensity

Traffic Cones, 4-inch and 6-inch Sleeves

1. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
2. Reflexite, Vinyl, "TR" (Semi-transparent) or "Conformalight"
3. 3M Series 3840
4. Avery Dennison S-9000C

Drums

1. Avery Dennison WR-6100

2. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
3. Reflexite, "Conformalight", "Super High Intensity" or "High Impact Drum Sheeting"
4. 3M Series 3810

Barricades: Type I, Medium-Intensity (Typically Enclosed Lens, Glass-Bead Element)

1. Nippon Carbide Industries, CN8117
2. Avery Dennison, W 1100 series
3. 3M Series CW 44

Barricades: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)

1. Avery Dennison, W-2100 Series

Vertical Clearance Signs: Structure Mounted

1. 3M Model 4061, Diamond Grade DG3, Fluorescent Yellow

Signs: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)

1. Avery Dennison, T-2500 Series
2. Nippon Carbide Industries, Nikkalite 18000

Signs: Type III, High-Intensity (Typically Encapsulated Glass-Bead Element)

1. Avery Dennison, T-5500A and T-6500 Series
2. Nippon Carbide Industries, Nikkalite Brand Ultralite Grade II
3. 3M 3870 and 3930 Series

Signs: Type IV, High-Intensity (Typically Unmetallized Microprismatic Element)

1. Avery Dennison, T-6500 Series
2. Nippon Carbide Industries, Crystal Grade, 94000 Series
3. Nippon Carbide Industries, Model No. 94847 Fluorescent Orange
4. 3M Series 3930 and Series 3924S

Signs: Type VI, Elastomeric (Roll-Up) High-Intensity, without Adhesive

1. Avery Dennison, WU-6014
2. Novabrite LLC, "Econobrite"
3. Reflexite "Vinyl"
4. Reflexite "SuperBright"
5. Reflexite "Marathon"
6. 3M Series RS20

Signs: Type VII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)

1. 3M Series 3924S, Fluorescent Orange
2. 3M LDP Series 3970

Signs: Type VIII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)

1. Avery Dennison, T-7500 Series
2. Avery Dennison, T-7511 Fluorescent Yellow
3. Avery Dennison, T-7513 Fluorescent Yellow Green
4. Avery Dennison, W-7514 Fluorescent Orange
5. Nippon Carbide Industries, Nikkalite Crystal Grade Series 92800
6. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92847 Fluorescent Orange

Signs: Type IX, Very-High-Intensity (Typically Unmetallized Microprismatic Element)

1. 3M VIP Series 3981 Diamond Grade Fluorescent Yellow
2. 3M VIP Series 3983 Diamond Grade Fluorescent Yellow/Green
3. 3M VIP Series 3990 Diamond Grade
4. Avery Dennison T-9500 Series
5. Avery Dennison, T9513, Fluorescent Yellow Green
6. Avery Dennison, W9514, Fluorescent Orange
7. Avery Dennison, T-9511 Fluorescent Yellow

SPECIALTY SIGNS

1. Reflexite "Endurance" Work Zone Sign (with Semi-Rigid Plastic Substrate)

ALTERNATIVE SIGN SUBSTRATES

Fiberglass Reinforced Plastic (FRP) and Expanded Foam PVC

1. Fiber-Brite (FRP)
2. Sequentia, "Polyplate" (FRP)
3. Intoplast Group "InteCel" (0.5 inch for Post-Mounted CZ Signs, 48-inch or less)(PVC)

Aluminum Composite, Temporary Construction Signs and Permanent Signs up to 4 foot, 7 Inches

1. Alcan Composites "Dibond Material, 80 mils"
2. Mitsubishi Chemical America, Alpolic 350
3. Bone Safety Signs, Bone Light ACM

THIS PAGE LEFT BLANK INTENTIONALLY

SECTION 9. DESCRIPTION OF WORK

The Vineyard Drive Bike Lane Project consists of the construction of Class II bike lanes along Vineyard Drive between Bethel Road and Ashton Way in Templeton. The work shall include excavation, removal of existing roadway surface, miscellaneous drainage improvements, signage, traffic striping and markings, and such other items or detail work not mentioned herein that are required by the Plans, the Standard Specifications, Standard Plans, or these Special Provisions shall be performed, constructed, furnished and/or installed.

THIS PAGE LEFT BLANK INTENTIONALLY

SECTION 10. CONSTRUCTION DETAILS

SECTION 10-1 GENERAL

10-1.01 ORDER OF WORK

Order of work shall conform to the provisions in Section 5-1.05, "Order of Work," of the Standard Specifications and these Special Provisions.

The work shall conform to the inherent stages of construction described in the Contractor's Progress Schedule as accepted by the Engineer. Work may proceed that is not in conflict with work in preceding stages, provided satisfactory progress is maintained in said preceding stages of construction.

After having received written Notice to Proceed, the Contractor shall install the required construction area signs in accordance with these Special Provisions. No other work will be allowed until the placement of the construction area signs has been completed.

The Contractor's attention is directed to the provisions of "Water Pollution Control" of these Special Provisions, requiring acceptance of the WPCP and installation of the specified BMPs before any work is performed.

Construction shall not begin prior to April 15, 2013 nor end after September 27, 2013. If construction activities occur outside of said time period, it is the Contractor's responsibility to meet all SWPPP requirements per the 2009-0009-DWQ Construction General Permit.

The Contractor's attention is directed to the provisions of "Existing Highway Facilities," "Hot Mix Asphalt (Type A)," and other requirements of these Special Provisions regarding order of work.

Full compensation for conforming to these requirements shall be considered as included in the prices paid for the various items of work and no additional compensation will be allowed therefor.

10-1.02 CONSTRUCTION SITE MANAGEMENT GENERAL

Summary

This work includes preventing and controlling spills, dewatering, and managing materials, waste, and nonstormwater.

Implement effective handling, storage, usage, and disposal practices to control material pollution and manage waste and nonstormwater at the job site before they come in contact with storm drain systems and receiving waters.

The following abbreviations are used in this Special Provision:

DTSC: Department of Toxic Substance Control.
ELAP: Environmental Laboratory Accreditation Program.
WPC: Water Pollution Control.

Submittals

Before you start dewatering, submit a dewatering and discharge work plan under Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications and "Water Pollution Control" of these Special Provisions. The dewatering and discharge work plan must include:

1. Title sheet and table of contents.
2. Description of dewatering and discharge activities detailing locations, quantity of water, equipment, and discharge point.
3. Estimated schedule for dewatering and discharge start and end dates of intermittent and continuous activities.
4. Discharge alternatives, such as dust control or percolation.
5. Visual monitoring procedures with inspection log.
6. Copy of written approval to discharge into a sanitary sewer system at least 5 business days before starting discharge activities.

Submit the following:

1. Material Safety Data Sheet at least 5 business days before material is used or stored.
2. Monthly inventory records for material used or stored.

Submit written approval from the local health agency, city, county, and sewer district before discharging from a sanitary or septic system directly into a sanitary sewer system.

CONSTRUCTION

Spill Prevention and Control

General

Keep material or waste storage areas clean, well-organized, and equipped with enough cleanup supplies for the material being stored.

Implement spill and leak prevention procedures for chemicals and hazardous substances stored on the job site. Whenever you spill or leak chemicals or hazardous substances at the job site, you are responsible for all associated cleanup costs and related liability.

Report minor, semi-significant, and significant or hazardous spills to the WPC manager. The WPC manager must notify the Engineer immediately.

As soon as it is safe, contain and clean up spills of petroleum materials and sanitary and septic waste substances listed under 40 CFR, Parts 110, 117, and 302.

Minor Spills

Minor spills consist of quantities of oil, gasoline, paint, or other materials that are small enough to be controlled by a 1st responder upon discovery of the spill.

Clean up a minor spill using the following procedures:

1. Contain the spread of the spill
2. Recover the spilled material using absorption
3. Clean the contaminated area
4. Dispose of the contaminated material and absorbents promptly and properly under "Waste Management" of these Special Provisions

Semi-Significant Spills

Semi-significant spills consist of spills that can be controlled by a 1st responder with help from other personnel.

Clean up a semi-significant spill immediately using the following procedures:

1. Contain the spread of the spill.
2. On paved or impervious surfaces, encircle and recover the spilled material with absorbent materials. Do not allow the spill to spread widely.
3. If the spill occurs on soil, contain the spill by constructing an earthen dike and dig up the contaminated soil for disposal.
4. If the spill occurs during precipitation, cover the spill with 10-mil plastic sheeting or other material to prevent contamination of runoff.
5. Dispose of the contaminated material promptly and properly under "Waste Management" of these Special Provisions.

Significant or Hazardous Spills

Significant or hazardous spills consist of spills that cannot be controlled by job site personnel.

Immediately notify qualified personnel of a significant or hazardous spill. Take the following steps:

1. Do not attempt to clean up the spill until qualified personnel have arrived.
2. Notify the Engineer and follow up with a report.
3. Obtain the immediate services of a spill contractor or hazardous material team.
4. Notify local emergency response teams by dialing 911 and county officials by using the emergency phone numbers retained at the job site.
5. Notify the California Emergency Management Agency State Warning Center at (916) 845-8911.
6. Notify the National Response Center at (800) 424-8802 regarding spills of Federal reportable quantities under 40 CFR 110, 119, and 302.
7. Notify other agencies as appropriate, including:
 - 7.1 Fire Department
 - 7.2 Public Works Department

- 7.3 Coast Guard
- 7.4 Highway Patrol
- 7.5 City Police or County Sheriff's Department
- 7.6 Department of Toxic Substances
- 7.7 California Division of Oil and Gas
- 7.8 Cal/OSHA
- 7.9 Regional Water Resources Control Board

Prevent a spill from entering stormwater runoff before and during cleanup activities. Do not bury or wash the spill with water.

Material Management

General

Minimize or eliminate discharge of material into the air, storm drain systems, and receiving waters while taking delivery of, using, or storing the following materials:

1. Hazardous chemicals, including acids, lime, glues, adhesives, paints, solvents, and curing compounds
2. Soil stabilizers and binders
3. Fertilizers
4. Detergents
5. Plaster
6. Petroleum materials, including fuel, oil, and grease
7. Asphalt and concrete components
8. Pesticides and herbicides

Employees trained in emergency spill cleanup procedures must be present during the unloading of hazardous materials or chemicals.

Use less hazardous materials if practicable.

The following activities must be performed at least 100 feet from concentrated flows of stormwater, drainage courses, and inlets if within the floodplain and at least 50 feet if outside the floodplain, unless otherwise approved by the Engineer:

1. Stockpiling materials
2. Storing pile-driving equipment and liquid waste containers
3. Washing vehicles and equipment in outside areas
4. Fueling and maintaining vehicles and equipment

Material Storage

If materials are stored:

1. Store liquids, petroleum materials, and substances listed in 40 CFR 110, 117, and 302 and place them in secondary containment facilities as specified by US DOT for storage of hazardous materials.
2. Secondary containment facilities must be impervious to the materials stored there for a minimum contact time of 72 hours.

3. Cover secondary containment facilities during non-working days and whenever precipitation is forecasted. Secondary containment facilities must be adequately ventilated.
4. Keep secondary containment facilities free of accumulated rainwater or spills. After precipitation, or in the event of spills or leaks, collect accumulated liquid and place it into drums within 24 hours. Handle the liquid as hazardous waste under "Waste Management" of these special provisions unless testing confirms that the liquid is nonhazardous.
5. Do not store incompatible materials, such as chlorine and ammonia, in the same secondary containment facility.
6. Store materials in their original containers with the original material labels maintained in legible condition. Immediately replace damaged or illegible labels.
7. Secondary containment facilities must have the capacity to contain precipitation from a 24-hour-long, 25-year storm, plus 10 percent of the aggregate volume of all containers or the entire volume of the largest container within the facility, whichever is greater.
8. Store bagged or boxed material on pallets. Protect bagged or boxed material from wind and rain during non-working days and whenever precipitation is forecasted.
9. Provide sufficient separation between stored containers to allow for spill cleanup or emergency response access. Storage areas must be kept clean, well organized, and equipped with cleanup supplies appropriate for the materials being stored.
10. Repair or replace perimeter controls, containment structures, covers, and liners as necessary. Inspect storage areas before and after precipitation and at least weekly during other times.

Stockpile Management

Minimize stockpiling of materials at the job site.

Implement water pollution control practices within 72 hours of stockpiling material or before a forecasted storm event, whichever occurs first. If stockpiles are being used, do not allow soil, sediment, or other debris to enter storm drains, open drainages, and watercourses.

Active and inactive soil stockpiles must be:

1. Covered with soil stabilization material or a temporary cover
2. Surrounded with a linear sediment barrier

Stockpiles of asphalt concrete and PCC rubble, HMA, aggregate base, or aggregate subbase must be:

1. Covered with a temporary cover
2. Surrounded with a linear sediment barrier

Stockpiles of pressure-treated wood must be:

1. Placed on pallets
2. Covered with impermeable material

Stockpiles of cold mix asphalt concrete must be:

1. Placed on an impervious surface
2. Covered with an impermeable material
3. Protected from stormwater run-on and runoff

Control wind erosion year round under Section 14-9.02, "Dust Control," of the Standard Specifications.

Repair or replace linear sediment barriers and covers as needed to keep them functioning properly. Whenever sediment accumulates to 1/3 of the linear sediment barrier height, remove the accumulated sediment.

Waste Management

Solid Waste

Do not allow litter, trash, or debris to accumulate anywhere on the job site, including storm drain grates, trash racks, and ditch lines. Pick up and remove litter, trash, and debris from the job site at least once a week. The WPC manager must monitor solid waste storage and disposal procedures on the job site.

If practicable, recycle nonhazardous job site waste and excess material. If recycling is not practicable, dispose of it under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way," of the Standard Specifications.

Furnish enough closed-lid dumpsters of sufficient size to contain the solid waste generated by work activities. When refuse reaches the fill line, empty the dumpsters. Dumpsters must be watertight. Do not wash out dumpsters at the job site. Furnish additional containers and pick up dumpsters more frequently during the demolition phase of construction.

Solid waste includes:

1. Brick
2. Mortar
3. Timber
4. Metal scraps
5. Sawdust
6. Pipe
7. Electrical cuttings
8. Nonhazardous equipment parts
9. Styrofoam and other packaging materials
10. Vegetative material and plant containers from highway planting
11. Litter and smoking material, including litter generated randomly by the public
12. Other trash and debris

Furnish and use trash receptacles in the job site yard, field trailers, and locations where workers gather for lunch and breaks.

Hazardous Waste and Contamination

If hazardous waste is, or will be, generated on the job site, the WPC manager must be thoroughly familiar with proper hazardous waste handling and emergency procedures under 40 CFR § 262.34(d)(5)(iii) and must have successfully completed training under 22 CA Code of Regs § 66265.16.

The WPC manager must:

1. Oversee and enforce hazardous waste management practices.
2. Inspect all hazardous waste storage areas daily, including all temporary containment facilities and satellite collection locations.
3. Oversee all hazardous waste transportation activities on the job site.

Submit a copy of uniform hazardous waste manifest forms to the Engineer within 24 hours of transporting hazardous waste.

Submit receiving landfill documentation of proper disposal to the Engineer within 5 business days of hazardous waste transport from the project.

Unanticipated Discovery of Asbestos and Hazardous Substances

Upon discovery of asbestos or a hazardous substance, comply with Section 14-11.02 "Asbestos and Hazardous Substances," of the Standard Specifications.

Hazardous Waste Management Practices

Handle, store, and dispose of hazardous waste under 22 CA Code of Regs Div 4.5.

Use the following storage procedures:

1. Store hazardous waste and potentially hazardous waste separately from nonhazardous waste at the job site.
2. For hazardous waste storage, use metal containers approved by the United States Department of Transportation for the transportation and temporary storage of hazardous waste.
3. Store hazardous waste in sealed, covered containers labeled with the contents and accumulation start date under 22 CA Code of Regs, Div 4.5. Labels must comply with the provisions of 22 CA Code of Regs, Div 4.5. § 66262.31 and § 66262.32. Immediately replace damaged or illegible labels.
4. Handle hazardous waste containers such that no spillage occurs.
5. Store hazardous waste away from storm drains, watercourses, moving vehicles, and equipment.
6. Furnish containers with adequate storage volume at convenient satellite locations for hazardous waste collection. Immediately move these containers to secure temporary containment facilities when no longer needed at the collection location or when full.

7. Store hazardous waste and potentially hazardous waste in secure temporary containment enclosures having secondary containment facilities impervious to the materials stored there for a minimum contact-time of 72 hours. Temporary containment enclosures must be located away from public access. Acceptable secure enclosures include a locked chain link fenced area or a lockable shipping container located within the project limits.
8. Design and construct secondary containment facilities with a capacity to contain precipitation from a 24-hour-long, 25-year storm; and 10 percent of the aggregate volume of all containers, or the entire volume of the largest container within the facility, whichever is greater.
9. Cover secondary containment facilities during non-working days and if a storm event is predicted. Secondary containment facilities must be adequately ventilated.
10. Keep secondary containment facility free of accumulated rainwater or spills. After a storm event, or in the event of spills or leaks, collect accumulated liquid and place into drums within 24 hours. Handle these liquids as hazardous waste unless testing determines them to be nonhazardous.
11. Do not store incompatible wastes, such as chlorine and ammonia, in the same secondary containment facility.
12. Provide sufficient separation between stored containers to allow for spill cleanup or emergency response access. Storage areas must be kept clean, well organized, and equipped with cleanup supplies appropriate for the wastes being stored.
13. Repair or replace perimeter controls, containment structures, covers, and liners as necessary. Inspect storage areas before and after a storm event, and at least weekly during other times.

Do not:

1. Overfill hazardous waste containers
2. Spill hazardous waste or potentially hazardous waste
3. Mix hazardous wastes
4. Allow hazardous waste or potentially hazardous waste to accumulate on the ground

Dispose of hazardous waste within 90 days of the start of generation. Use a hazardous waste manifest and a transporter registered with the DTSC and in compliance with the CA Highway Patrol Biennial Inspection of Terminals Program to transport hazardous waste to an appropriately permitted hazardous waste management facility.

Dust Control for Hazardous Waste or Contamination

Excavation, transportation, and handling of material containing hazardous waste or contamination must result in no visible dust migration. Have a water truck or tank on the job site at all times while clearing and grubbing and performing earthwork operations in work areas containing hazardous waste or contamination.

Stockpiling of Hazardous Waste or Contamination

Do not stockpile material containing hazardous waste or contamination unless ordered. Stockpiles of material containing hazardous waste or contamination must not be placed where affected by surface run-on or run-off. Cover stockpiles with 13 mils minimum thickness of plastic sheeting or 1 foot of nonhazardous material. Do not place stockpiles in environmentally sensitive areas. Stockpiled material must not enter storm drains, inlets, or waters of the State.

Contractor-Generated Hazardous Waste

You are the generator of hazardous waste generated as a result of materials you bring to the job site. Use hazardous waste management practices if you generate waste on the job site from the following substances:

1. Petroleum materials
2. Asphalt materials
3. Concrete curing compound
4. Pesticides
5. Acids
6. Paints
7. Stains
8. Solvents
9. Wood preservatives
10. Roofing tar
11. Road flares
12. Lime
13. Glues and adhesives
14. Materials classified as hazardous waste under 22 CA Code of Regs, Div 4.5

If hazardous waste constituent concentrations are unknown, use a laboratory certified by the ELAP under the California Department Of Public Health to analyze a minimum of 4 discrete representative samples of the waste to determine whether it is a hazardous waste and to determine safe and lawful methods for storage and disposal. Perform sampling and analysis in compliance with US EPA Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (SW-846) and under 22 CA Code of Regs, Div 4.5.

Use your US EPA Generator Identification Number and sign hazardous waste manifests for the hazardous waste you generate.

Identify contaminated soil resulting from spills or leaks by noticing discoloration, or differences in soil properties. Immediately notify the Engineer of spills or leaks. Clean up spills and leaks under the Engineer's direction and to the satisfaction of the Engineer. Soil with evidence of contamination must be sampled and analysis performed by a laboratory certified by ELAP.

If sampling and analysis of contaminated soil demonstrates that it is a hazardous waste, handle and dispose of the soil as hazardous waste. You are the generator of hazardous waste created as the result of spills or leaks for which you are responsible.

Prevent the flow of water, including ground water, from mixing with contaminated soil by using one or a combination of the following measures:

1. Berms
2. Cofferdams
3. Grout curtains
4. Freeze walls
5. Concrete seal course

If water mixes with contaminated soil and becomes contaminated, sample and analyze the water using a laboratory certified by the ELAP. If analysis results demonstrate that the water is a hazardous waste, manage and dispose of the water as hazardous waste.

County-Generated Hazardous Waste

If the County is the generator of hazardous waste during the work performed on this project, use hazardous waste management practices.

Labels must comply with the provisions of 22 CA Code of Regs § 66262.31 and § 66262.32. Mark labels with:

1. Date the hazardous waste is generated
2. The words "Hazardous Waste"
3. Composition and physical state of the hazardous waste (for example, asphalt grindings with thermoplastic or paint)
4. The word "Toxic"
5. Name, address, and telephone number of the Engineer
6. Contract number
7. Contractor or subcontractor name

Handle the containers such that no spillage occurs.

Hazardous Waste Transport and Disposal

Dispose of hazardous waste within California at a disposal site operating under a permit issued by the DTSC.

The Engineer will obtain the US EPA Generator Identification Number for hazardous waste disposal.

The Engineer will sign all hazardous waste manifests. Notify the Engineer 5 business days before the manifests are to be signed.

The County will not consider you a generator of the hazardous waste and you will not be obligated for further cleanup, removal, or remedial action for such material if handled or disposed of under these Special Provision and the appropriate State and federal laws and regulations and county and municipal ordinances and regulations regarding hazardous waste.

Paint Waste

Clean water-based and oil-based paint from brushes or equipment within a contained area in a way that does not contaminate soil, receiving waters, or storm drain systems. Handle and dispose of the following as hazardous waste: paints, thinners, solvents, residues, and sludges that cannot be recycled or reused. When thoroughly dry, dispose of the following as solid waste: dry latex paint, paint cans, used brushes, rags, absorbent materials, and drop cloths.

Concrete Waste

Use practices to prevent the discharge of asphalt concrete, PCC, and HMA waste into storm drain systems and receiving waters.

Collect and dispose of asphalt concrete, PCC, and HMA waste generated at locations where:

1. Concrete material, including grout, is used
2. Concrete dust and debris result from demolition
3. Sawcutting, coring, grinding, grooving, or hydro-concrete demolition creates a residue or slurry
4. Concrete trucks or other concrete-coated equipment is cleaned at the job site

Sanitary and Septic Waste

Do not bury or discharge wastewater from a sanitary or septic system within the highway. A sanitary facility discharging into a sanitary sewer system must be properly connected and free from leaks. Place a portable sanitary facility at least 50 feet away from storm drains, receiving waters, and flow lines.

Comply with local health agency provisions if using an on-site disposal system.

Liquid Waste

Use practices that will prevent job-site liquid waste from entering storm drain systems and receiving waters. Liquid waste include the following:

1. Drilling slurries or fluids
2. Grease-free and oil-free wastewater and rinse water
3. Dredgings, including liquid waste from cleaning drainage systems
4. Liquid waste running off a surface, including wash or rinse water
5. Other nonstormwater liquids not covered by separate permits

Hold liquid waste in structurally sound, leak-proof containers, such as roll-off bins or portable tanks.

Liquid waste containers must be of sufficient quantity and volume to prevent overflow, spills, and leaks.

Store containers at least 50 feet from moving vehicles and equipment.

Remove and dispose of deposited solids from sediment traps unless the Engineer approves another method.

Liquid waste may require testing to determine hazardous material content before disposal.

Dispose of drilling fluids and residue.

If a location approved by the Engineer is available within the job site, fluids and residue exempt under 23 CA Code of Regs § 2511(g) may be dried by evaporation in a leak-proof container. Dispose of the remaining as solid waste.

Nonstormwater Management

Water Control and Conservation

Manage water used for work activities in a way that will prevent erosion and the discharge of pollutants into storm drain systems and receiving waters. Obtain authorization before washing anything at the job site with water that could discharge into a storm drain system or receiving waters. Report discharges immediately.

Implement water conservation practices if water is used at the job site. Inspect irrigation areas. Adjust watering schedules to prevent erosion, excess watering, or runoff. Shut off the water source to broken lines, sprinklers, or valves and repair breaks within 24 hours. Reuse water from waterline flushing for landscape irrigation if practicable. Sweep and vacuum paved areas. Do not wash paved areas with water.

Direct runoff water, including water from water line repair, from the job site to areas where it can infiltrate into the ground. Do not allow runoff water to enter storm drain systems and receiving waters. Do not allow spilled water to escape filling areas for water trucks. Direct water from off-site sources around the job site if practicable. Minimize the contact of off-site water with job site water.

Illegal Connection and Discharge Detection and Reporting

Before starting work, inspect the job site and the job site's perimeter for evidence of illicit connections, illegal discharges, and dumping. After starting work, inspect the job site and perimeter on a daily schedule for illicit connections and illegal dumping and discharges.

Whenever illegal connections, discharges, or dumping are discovered, notify the Engineer immediately. Do not take further action unless ordered. Assume that unlabeled or unidentifiable material is hazardous.

Look for the following evidence of illicit connections, illegal discharges, and dumping:

1. Debris or trash piles
2. Staining or discoloration on pavement or soils
3. Pungent odors coming from drainage systems
4. Discoloration or oily sheen on water

5. Stains and residue in ditches, channels, or drain boxes
6. Abnormal water flow during dry weather
7. Excessive sediment deposits
8. Nonstandard drainage junction structures
9. Broken concrete or other disturbances at or near junction structures

Vehicle and Equipment Cleaning

Limit vehicle and equipment cleaning or washing at the job site except what is necessary to control vehicle tracking or hazardous waste. Notify the Engineer before cleaning vehicles and equipment at the job site with soap, solvents, or steam. Contain and recycle or dispose of resulting waste under "Waste Management" of these special provisions, whichever is applicable. Do not use diesel to clean vehicles or equipment. Minimize the use of solvents.

Clean or wash vehicles and equipment in a structure equipped with disposal facilities. You may wash vehicles in an outside area if the area is:

1. Paved with asphalt concrete, HMA, or PCC
2. Surrounded by a containment berm
3. Equipped with a sump to collect and dispose of wash water

Use as little water as practicable whenever washing vehicles and equipment with water. Hoses must be equipped with a positive shutoff valve.

Discharge liquid from wash racks to a recycling system or to another system approved by the Engineer. Remove liquids and sediment as necessary.

Vehicle and Equipment Fueling and Maintenance

If practicable, perform maintenance on vehicles and equipment off-site.

If fueling or maintenance must be done at the job site, assign a site or sites, and obtain authorization before using them. Minimize mobile fueling and maintenance activities. Fueling and maintenance activities must be performed on level ground in areas protected from stormwater run-on and runoff.

Use containment berms or dikes around fueling and maintenance areas. Keep adequate quantities of absorbent spill-cleanup material and spill kits in the fueling or maintenance area and on fueling trucks. Dispose of spill-cleanup material and kits immediately after use under "Waste Management" of these special provisions. Use drip pans or absorbent pads during fueling or maintenance.

Do not leave fueling or maintenance areas unattended during fueling and maintenance activities. Fueling nozzles must be equipped with an automatic shutoff control. Nozzles must be equipped with vapor-recovery fueling nozzles where required by the Air Quality Management District. Secure nozzles in an upright position when not in use. Do not top off fuel tanks.

Recycle or properly dispose of used batteries and tires under "Waste Management" of these special provisions.

If leaks cannot be repaired immediately, remove the vehicle or equipment from the job site.

Material and Equipment Used Over Water

Place drip pans and absorbent pads under vehicles and equipment used over water. Keep an adequate supply of spill-cleanup material with vehicles and equipment. Place drip pans or plastic sheeting under vehicles and equipment on docks, barges, or other surfaces over water whenever vehicles or equipment will be idle for more than 1 hour.

Furnish watertight curbs or toe boards on barges, platforms, docks, or other surfaces over water to contain material, debris, and tools. Secure material to prevent spills or discharge into the water due to wind.

Report discharges to receiving waters immediately upon discovery. Submit a discharge notification to the Engineer.

Structure Removal Over or Adjacent to Water

Do not allow demolished material to enter storm drain systems and receiving waters. Use covers and platforms approved by the Engineer to collect debris. Use attachments on equipment to catch debris during small demolition activities. Empty debris-catching devices daily.

Paving, Sealing, Sawcutting, Grooving, and Grinding Activities

Prevent material from entering storm drain systems and receiving waters including:

1. Cementitious material
2. Asphaltic material
3. Aggregate or screenings
4. Sawcutting, grooving, and grinding residue
5. Pavement chunks
6. Shoulder backing
7. Methacrylate
8. Sandblasting residue

Cover drainage inlets and use linear sediment barriers to protect downhill receiving waters until paving, sealing, sawcutting, grooving, and grinding activities are completed and excess material has been removed. Cover drainage inlets and manholes during the application of seal coat, tack coat, slurry seal, or fog seal.

Whenever precipitation is forecasted, limit paving, sawcutting, and grinding to places where runoff can be captured.

Do not start seal coat, tack coat, slurry seal, or fog seal activities whenever precipitation is forecasted during the application and curing period. Do not excavate material from existing roadways during precipitation.

Use a vacuum to remove slurry immediately after slurry is produced. Do not allow the slurry to run onto lanes open to traffic or off the pavement.

Collect the residue from PCC grooving and grinding activities with a vacuum attachment on the grinding machine. Do not leave the residue on the pavement or allow the residue to flow across pavement.

You may stockpile material excavated from existing roadways under "Material Management" of these special provisions if approved by the Engineer.

Do not coat asphalt trucks and equipment with substances that contain soap, foaming agents, or toxic chemicals.

Park paving equipment over drip pans or plastic sheeting with absorbent material to catch drips if the paving equipment is not in use.

Thermoplastic Striping and Pavement Markers

Do not preheat, transfer, or load thermoplastic within 50 feet of drainage inlets and receiving waters.

Do not unload, transfer, or load bituminous material for pavement markers within 50 feet of drainage inlets and receiving waters.

Collect and dispose of bituminous material from the roadway after removing markers under "Waste Management" of these special provisions.

Pile Driving

Keep spill kits and cleanup materials at pile driving locations. Park pile driving equipment over drip pans, absorbent pads, or plastic sheeting with absorbent material. Protect pile driving equipment by parking on plywood and covering with plastic whenever precipitation is forecasted.

Store pile driving equipment on level ground and protect it from stormwater run-on when not in use. Use vegetable oil instead of hydraulic fluid if practicable.

Concrete Curing

Do not overspray chemical curing compounds. Minimize the drift by spraying as close to the concrete as practicable. Do not allow runoff of curing compounds. Cover drainage inlets before applying the curing compound.

Minimize the use and discharge of water by using wet blankets or similar methods to maintain moisture when concrete is curing.

Concrete Finishing

Collect and dispose of water and solid waste from high-pressure water blasting under "Waste Management" of these special provisions. Collect and dispose of sand and solid waste from sandblasting under "Waste Management" of these special provisions. Before sandblasting, cover drainage inlets within 50 feet of sandblasting. Minimize the drift of dust and blast material by keeping the nozzle

close to the surface of the concrete. If the character of the blast residue is unknown, test it for hazardous materials and dispose of it properly.

Inspect containment structures for concrete finishing for damage before each day of use and before forecasted precipitation. Remove liquid and solid waste from containment structures after each work shift.

Sweeping

Sweep by hand or mechanical methods, such as vacuuming. Do not use methods that use only mechanical kick brooms.

Sweep paved roads at construction entrance and exit locations and paved areas within the job site:

1. During clearing and grubbing activities
2. During earthwork activities
3. During trenching activities
4. During roadway structural-section activities
5. When vehicles are entering and leaving the job site
6. After soil-disturbing activities
7. After observing off-site tracking of material

Monitor paved areas and roadways within the project. Sweep within:

1. 1 hour whenever sediment or debris is observed during activities that require sweeping
2. 24 hours whenever sediment or debris is observed during activities that do not require sweeping

Remove collected material, including sediment, from paved shoulders, drain inlets, curbs and dikes, and other drainage areas. You may stockpile collected material at the job site under "Material Management" of these special provisions. If stockpiled, dispose of collected material at least once per week under "Waste Management" of these special provisions.

You may dispose of sediment within the job site collected during sweeping activities. Protect the disposal areas against erosion.

Keep dust to a minimum during street sweeping activities. Use water or a vacuum whenever dust generation is excessive or sediment pickup is ineffective.

Remove and dispose of trash collected during sweeping under "Waste Management" of these Special Provisions.

Dewatering

Dewatering consists of discharging accumulated stormwater, groundwater, or surface water from excavations or temporary containment facilities.

Perform dewatering work as specified for the work items involved, such as temporary active treatment system or dewatering and discharge.

If dewatering and discharging activities are not specified under a work item and you perform dewatering activities:

1. Conduct dewatering activities under Caltrans Field Guide for Construction Site Dewatering.
2. Ensure that any dewatering discharge does not cause erosion, scour, or sedimentary deposits that could impact natural bedding materials.
3. Discharge the water within the project limits. If the water cannot be discharged within project limits due to site constraints or contamination, dispose of the water as directed by the Engineer.
4. Do not discharge stormwater or nonstormwater that has an odor, discoloration other than sediment, an oily sheen, or foam on the surface. Notify the Engineer immediately upon discovering any such condition.

PAYMENT

The contract lump sum price paid for "CONSTRUCTION SITE MANAGEMENT" includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in spill prevention and control, material management, waste management, nonstormwater management, and dewatering activities, including identifying, sampling, testing, handling, and disposing of hazardous waste resulting from your activities, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as ordered by the Engineer.

10-1.03

WATER POLLUTION CONTROL

GENERAL

Summary

This work includes developing and implementing a water pollution control program (WPCP) for projects where soil disturbance from work activities will be one of the following:

1. Less than 1 acre
2. Less than 5 acres if the project has an Environmental Protection Agency Small Construction Project Erosivity Waiver referred to herein as "Erosivity Waiver"

This project qualifies for an Erosivity Waiver because the soil disturbance is anticipated to be between 1 and 5 acres and the R-factor is less than 5. The Erosivity Waiver and R-factor are described in the National Pollution Discharge Elimination System (NPDES) General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Order No. 2009-0009-DWQ, NPDES No. CAS000002).

Schedule all work to occur from April 15 to September 27. Deviation from this schedule may void the Erosivity Waiver.

Information on forms, reports, and other documents can be found in the following Department manuals:

1. Field Guide for Construction Site Dewatering
2. Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Program (WPCP) Preparation Manual
3. Construction Site Best Management Practices (BMP) Manual

For the above-referenced manuals, go to the Department's Web site for the Division of Construction, Storm Water and Water Pollution Control Information or the Department's Publication Distribution Unit.

Do not start job site activities until:

1. The WPCP is approved.

Conceptual Water Pollution Control Plans have been prepared for the Contractor's information (see Attachment C)

If you operate a Contractor-support facility, protect stormwater systems and receiving waters from the discharge of potential pollutants by using water pollution control practices.

Contractor-support facilities include:

1. Staging areas
2. Storage yards for equipment and materials
3. Mobile operations
4. Batch plants for PCC and HMA
5. Crushing plants for rock and aggregate
6. Other facilities installed for your convenience, such as haul roads

Discharges from manufacturing facilities, such as batch plants and crushing plants, must comply with the general waste discharge requirements for Order No. 97-03-DWQ, NPDES General Permit No. CAS000001, issued by the State Water Resources Control Board (SWRCB) for "Discharge of Storm Water Associated with Industrial Activities Excluding Construction Activities" and referred to herein as "General Industrial Permit." For the General Industrial Permit, go to the Web site for the SWRCB.

If you operate a batch plant to manufacture PCC, HMA, or other material or a crushing plant to produce rock or aggregate, obtain coverage under the General Industrial Permit. You must be covered under the General Industrial Permit for batch plants and crushing plants located:

1. Outside of the job site
2. Within the job site that serve 1 or more contracts

If you obtain or dispose of material at a noncommercially operated borrow or disposal site, prevent water pollution due to erosion at the site during and after completion of your activities. Upon completion of your work, leave the site in a condition such that water will not collect or stand therein.

The County does not pay for water pollution control practices at Contractor-support facilities and noncommercially operated borrow or disposal sites.

Definitions

construction phase: Includes (1) highway construction phase for building roads and structures, (2) plant establishment and maintenance phase for placing vegetation for final stabilization, and (3) suspension phase for suspension of work activities or winter shutdown. The construction phase continues from the start of work activities to contract acceptance.

inactive area: Area where soil-disturbing work activities have not occurred within 15 days.

qualifying rain event: Storm that produces at least 0.5 inch of precipitation with a 48-hour or greater period between rain events.

storm event: Storm that produces or is forecasted to produce at least 0.10 inch of precipitation within a 24-hour period.

Submittals

General

Within 10 days of receipt of the fully executed contract:

1. Submit 1 electronic and 2 printed copies (double-sided) of your WPCP for review. Allow 10 days for the Engineer's review. The Engineer provides comments and specifies the date when the review stopped if revisions are required.
2. Resubmit a revised WPCP within 7 days of receiving the Engineer's comments. The Department's review resumes when the complete WPCP has been resubmitted.
3. When the Engineer accepts the WPCP, submit an electronic copy and 2 printed copies (double-sided) of the approved WPCP.

A qualified SWPPP practitioner (QSP) or qualified SWPPP developer (QSD) must prepare the WPCP.

The WPCP must comply with the Department's Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Plan (WPCP) Preparation Manual and must:

1. Show the location of disturbed soil areas, water bodies, and water conveyances
2. Describe the work involved in the installation, maintenance, repair, and removal of temporary water pollution control practices

3. Show the locations and types of water pollution control practices that will be used for:
 - 3.1. Stormwater and nonstormwater in areas outside the job site but related to work activities, including:
 - 3.1.1. Staging areas
 - 3.1.2. Storage yards
 - 3.1.3. Access roads
 - 3.2. Activities or mobile activities related to all NPDES permits
 - 3.3. Contractor-support facilities
4. Show the locations and types of temporary water pollution control practices that will be used in the work for each construction phase
5. Show the locations and types of water pollution control practices that will be installed permanently under the contract
6. Include a schedule showing when:
 - 6.1. Work activities will be performed that could cause the discharge of pollutants into stormwater
 - 6.2. Water pollution control practices associated with each construction phase will be implemented
 - 6.3. Soil stabilization and sediment control practices for disturbed soil areas will be implemented

Amend the WPCP whenever:

1. Changes in work activities could affect the discharge of pollutants
2. Water pollution control practices are added by Contract Change Order
3. Water pollution control practices are added at your discretion
4. Changes in the quantity of disturbed soil are substantial
5. Objectives for reducing or eliminating pollutants in stormwater discharges have not been achieved
6. Project receives a written notice or order from the RWQCB or any other regulatory agency

Allow the same review time for amendments to the WPCP as for the original WPCP.

Information After Storm Event

Within 48 hours after the conclusion of a storm event resulting in a discharge, after a nonstormwater discharge, or after receiving a written notice or an order from the RWQCB or another regulatory agency, the WPC manager must submit the following information:

1. Date, time, location, and nature of the activity and the cause of the notice or order
2. Type and quantity of discharge
3. Water pollution control practices in use before the discharge or before receiving the notice or order
4. Description of water pollution control practices and corrective actions taken to manage the discharge or cause of the notice

Training Records

Submit water pollution control training records for all employees and subcontractors who will be working at the job site. Include the training subjects, training dates, ongoing training, and tailgate meetings with your submittal. Submit records for:

1. Existing employees within 5 business days of obtaining WPCP approval
2. New employees within 5 business days of receiving the training
3. A subcontractor's employees at least 5 business days before the subcontractor starts work

Quality Control and Assurance

Training

Employees must receive initial water pollution control training before starting work at the job site.

For your project managers, supervisory personnel, subcontractors, and employees involved in water pollution control work:

1. Provide stormwater training in the following subjects:
 - 1.1. Water pollution control rules and regulations
 - 1.2. Implementation and maintenance for:
 - 1.2.1. Temporary soil stabilization
 - 1.2.2. Temporary sediment control
 - 1.2.3. Tracking control
 - 1.2.4. Wind erosion control
 - 1.2.5. Material pollution prevention and control
 - 1.2.6. Waste management
 - 1.2.7. Nonstormwater management
2. Conduct weekly training meetings covering:
 - 2.1. Deficiencies and corrective actions for water pollution control practices
 - 2.2. Water pollution control practices required for work activities during the week
 - 2.3. Spill prevention and control
 - 2.4. Material delivery, storage, usage, and disposal
 - 2.5. Waste management
 - 2.6. Nonstormwater management procedures

Water Pollution Control Manager

General

The water pollution control (WPC) manager must be a QSP or QSD. Assign 1 WPC manager to implement the WPCP. You may assign a QSD other than the WPC manager to develop the WPCP.

Responsibilities

The WPC manager must:

1. Be responsible for water pollution control work
2. Be the primary contact for water pollution control work

3. Oversee:
 - 3.1. Maintenance of water pollution control practices
 - 3.2. Inspections of water pollution control practices identified in the WPCP
 - 3.3. Inspections and reports for visual monitoring
 - 3.4. BMP status reports
4. Oversee and enforce hazardous waste management practices including spill prevention and control measures
5. Have authority to mobilize crews to make immediate repairs to water pollution control practices
6. Ensure that all employees have current water pollution control training
7. Implement the approved WPCP
8. Amend the WPCP if required
9. Be at the job site within 2 hours of being contacted
10. Have the authority to stop construction activities damaging water pollution control practices or causing water pollution

CONSTRUCTION

General

Manage work activities in a way that reduces the discharge of pollutants to surface waters, groundwater, and separate municipal storm sewer systems.

Continue WPCP implementation during any suspension of work activities.

The Contractor shall be responsible for delays and shall pay all costs associated with submitting a SWPPP due to Contractor's actions that result in one of the following:

1. More than 5 acres of soil disturbance on projects with an Erosivity Waiver
2. Failure to comply with the schedule if the delays void the Erosivity Waiver

Install facilities and devices used for water pollution control practices before performing work activities. Install soil stabilization materials for water pollution control practices in all inactive areas or before storm events.

Repair or replace water pollution control practices within 24 hours of discovering any damage, unless a longer period is authorized.

The County does not pay for the cleanup, repair, removal, disposal, or replacement of water pollution control practices due to improper installation or your negligence. You may request changes to the water pollution control work or the Engineer may order changes to water pollution control work. Changes may include additional or new water pollution control practices. Additional water pollution control work is paid for as extra work under Section 4-1.03D, "Extra Work," of the Standard Specifications.

Retain a printed copy of the approved WPCP at the job site.

Monitoring

Monitor and inspect water pollution control practices at the job site.

Notify the Engineer within 6 hours whenever any of the following occurs:

1. You identify discharges into receiving waters or drainage systems that are causing or could cause water pollution
2. You receive a written notice or order for the project from the RWQCB or any other regulatory agency

Monitor the National Weather Service's forecast on a daily basis. For the National Weather Service's forecast, go to the Web site for the National Weather Service.

Inspections

Use the Stormwater Site Inspection Report form for documenting site inspections. The WPC manager must oversee:

1. Inspections of water pollution control practices identified in WPCP:
 - 1.1. Before a forecasted storm event
 - 1.2. After a qualifying rain event that produces site runoff
 - 1.3. At 24-hour intervals during extended storm events
 - 1.4. On a predetermined schedule of at least once a week
2. Daily inspections of:
 - 2.1. Storage areas for hazardous materials and waste
 - 2.2. Hazardous waste disposal and transporting activities
 - 2.3. Hazardous material delivery and storage activities
3. Inspections of:
 - 3.1. Vehicle and equipment cleaning facilities:
 - 3.1.1. Daily if vehicle and equipment cleaning occurs daily
 - 3.1.2. Weekly if vehicle and equipment cleaning does not occur daily
 - 3.2. Vehicle and equipment maintenance and fueling areas:
 - 3.2.1. Daily if vehicle and equipment maintenance and fueling occurs daily
 - 3.2.2. Weekly if vehicle and equipment maintenance and fueling does not occur daily
 - 3.3. Vehicles and equipment at the job site for leaks and spills on a daily schedule. Verify that operators are inspecting vehicles and equipment each day of use.
 - 3.4. Demolition sites within 50 feet of storm drain systems and receiving waters daily.
 - 3.7. Paved roads at job site access points for street sweeping:
 - 3.7.1. Daily if earthwork and other sediment or debris-generating activities occur daily
 - 3.7.2. Weekly if earthwork and other sediment or debris-generating activities do not occur daily
 - 3.7.3. Within 24 hours of precipitation forecasted by the National Weather Service

Deficiencies

Whenever you or the Engineer identify a deficiency in the implementation of the approved WPCP, correct the deficiency:

1. Immediately, unless a later date is authorized
2. Before precipitation occurs

The County may correct the deficiency and deduct the cost of correcting the deficiency from payment if you fail to correct the deficiency by the agreed date or before the onset of precipitation.

MEASUREMENT AND PAYMENT

If you fail to comply with "Water Pollution Control" of these Special Provisions or fail to implement water pollution control practices during each estimate period, the County withholds 25 percent from progress payment.

Withholds for failure to perform water pollution control work are in addition to all other withholds provided for in the contract. The County returns performance-failure withholds in the progress payment following the correction for noncompliance.

Full compensation for complying with these Water Pollution Control Special Provisions shall be considered as included in the contract lump sum price paid for "CONSTRUCTION SITE MANAGEMENT" and no additional compensation will be allowed therefor.

The County does not pay for implementation of water pollution control practices in areas outside the right of way not specifically provided for in the drawings or in the Special Provisions.

The County does not pay for water pollution control practices installed at construction support facilities.

10-1.04

DUST CONTROL

This work consists of Contractor providing all the labor, materials, tools, equipment, and incidentals required for dust control in conformance with the provisions of Section 10, "Dust Control," of the Standard Specifications.

Dust control operations shall be performed by Contractor as follows:

1. Reduce the amount of disturbed area where possible.
2. Prevent airborne dust from leaving the site.
3. Control dust from all dirt and stock pile areas.
4. All trucks hauling dirt, sand, soil or other loose materials are to be covered or should maintain at least two feet of freeboard (minimum vertical distance between top of load and top of trailer) in accordance with California Vehicle Code Section 23114.

5. Ensure that trucks and equipment leaving the site do not carry soil material onto adjacent paved roads; clean adjacent paved roads at the end of each day if visible soil material is carried from the site onto those roads.

The Contractor shall prevent airborne dust from leaving the work site to the fullest extent possible. All trucks hauling dirt, sand, soil or other loose materials to and from the work site are to be covered to control dust. Any and all stockpiles shall have measures to control dust during construction. Any tracked soil onto adjacent paved roads as a result of the construction shall be cleaned off by the Contractor at the end of each workday. The application of either water or dust palliative shall be used to control dust.

Payment for dust control shall be considered as included in the contract prices paid for the various contract items of work involved and no separate payment will be made therefor.

10-1.05 FIBER ROLLS

Fiber Rolls shall consist of installing and maintaining fiber rolls in conformance with the details shown on the plans, the provisions in Section 21, "Erosion Control," of the Standard Specifications, and these Special Provisions.

Fiber rolls shall be installed on excavation slopes and other disturbed soil areas. **Plastic or other non-biodegradable netting will not be allowed.**

Fiber rolls shall be Type 1.

MATERIALS

Fiber Roll

Fiber roll shall be either:

1. Constructed with a premanufactured blanket consisting of either wood excelsior, rice or wheat straw, or coconut fibers or a combination of these materials. The blanket shall be between 6 feet and 8 feet in width and between 65 feet and 95 feet in length. Wood excelsior shall be individual fibers, of which 80 percent shall be 6 inches or longer in length. The blanket shall have a biodegradable jute, sisal, or coir fiber netting on at least one side. The blanket shall be rolled along the width and secured with jute twine spaced 6 feet apart along the full length of the roll and placed 6 inches from the ends of each roll. The finished roll shall be 6 inches nominal in diameter, a minimum of 20 feet in length, and shall weigh a minimum of 0.5 pound per linear foot. More than one blanket may be required to achieve the finished roll diameter. When more than one blanket is required, blankets shall be jointed longitudinally with an overlap of 6 inches along the length of the blanket.
2. A premanufactured roll of rice or wheat straw, wood excelsior, or coconut fiber encapsulated within a biodegradable jute, sisal, or coir fiber netting. The netting shall have a minimum durability of one year after installation.

The netting shall be secured tightly at each end of the roll. Rolls shall be between 8 inches and 12 inches in diameter. Rolls between 8 inches and 10 inches in diameter shall have a minimum weight of 1 pound per linear foot and a minimum length of 20 feet. Rolls between 10 inches and 12 inches in diameter shall have a minimum weight of 3 pounds per linear foot and a minimum length of 10 feet.

Stakes

Wood stakes shall be a minimum of 1" x 1" x 24" in size for Type 1 installation, or a minimum of 1" x 2" x 24" in size for Type 2 installation. Wood stakes shall be untreated fir, redwood, cedar, or pine and cut from sound timber. They shall be straight and free of loose or unsound knots and other defects which would render them unfit for the purpose intended. Metal stakes shall not be used.

Rope

Rope shall be biodegradable, such as sisal or manila, with a minimum diameter of ¼ inch.

INSTALLATION

Fiber rolls shall be installed as follows:

1. Fiber rolls (Type 1): Furrows shall be constructed to a depth between 2 inches and 4 inches, and to a sufficient width to hold the fiber roll. Stakes shall be installed 4 feet apart along the length of the fiber rolls and stopped at 12 inches from each end of the rolls. Stakes shall be driven to a maximum of 2 inches above, or flush with the top of the roll.
2. Fiber rolls shall be placed 10 feet apart along the slope for slope inclination (horizontal: vertical) of 2:1 and steeper, 15 feet apart along the slope for slope inclination between 2:1 and 4:1, 20 feet apart along the slope for slope inclination between 4:1 and 10:1, and a maximum of 50 feet apart along the slope for slope inclination of 10:1 and flatter.
3. The bedding area for the fiber rolls shall be cleared of obstructions including rocks, clods, and debris greater than one inch in diameter before installation.
4. Fiber rolls shall be installed approximately parallel to the slope contour.

If the intended function of the fiber rolls to disperse concentrated water runoff and to reduce runoff velocities is impaired, the Contractor shall take action to repair or replace the fiber rolls. Split, torn, or unraveling rolls shall be repaired or replaced. Broken or split stakes shall be replaced. Sagging or slumping fiber rolls shall be repaired with additional stakes or replaced. Locations where rills and other evidence of concentrated runoff have occurred beneath the rolls shall be corrected. Fiber rolls shall be repaired or replaced within 24 hours of identifying the deficiency.

MEASUREMENT AND PAYMENT

Quantities of fiber rolls to be paid for will be determined by the linear foot measured along the centerline of the installed roll. Where fiber rolls are joined and overlapped, the overlap will be measured as a single installed roll.

The contract price paid per linear foot for "FIBER ROLLS" shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing fiber rolls, complete in place, including furrow excavation and backfill, repairing or replacing fiber rolls as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

Damage to fiber rolls resulting from the Contractor's vehicles, equipment, or operations shall be repaired at the Contractor's expense.

10-1.06 TEMPORARY CHECK DAM (TYPE 2)

Temporary Check Dams shall consist of installing and maintaining temporary check dams in conformance with the details shown on the plans, the provisions in Section 21, "Erosion Control," of the Standard Specifications, and these Special Provisions.

Temporary check dams shall be one of the water pollution control practices for sediment control.

Temporary check dams shall be Type 2 (gravel bag).

MATERIALS

Gravel-filled Bag

Gravel-filled bags used for temporary check dams shall be knotted, roped, and placed at a maximum of 6 feet apart on the temporary cover fabric. Gravel-filled bags shall be between 30 pounds and 50 pounds in weight, between 24 inches and 32 inches in length, and between 16 inches and 20 inches in width. Gravel bag fabric shall be nonwoven polypropylene geotextile with a minimum unit weight of 8.0 ounces per square yard. The fabric shall have a minimum grab tensile strength (one-inch grip) of 200 pounds in conformance with the requirements in ASTM Designation: D 4632, and an ultraviolet (UV) stability of 70 percent tensile strength retained after 500 hours in conformance with the requirements in ASTM Designation: D 4355, xenon arc lamp method. Gravel shall consist of noncohesive material between 3/8 inch and 3/4 inch in diameter, free of clay balls, organic matter, and other deleterious material. The openings of gravel-filled bags shall be secured to prevent escape of gravel.

INSTALLATION

Temporary check dams shall be installed as follows:

1. The bedding area for the temporary check dam shall be cleared of obstructions including, rocks, clods, and debris greater than one inch in diameter before installation.
2. The temporary check dam shall be installed across and approximately perpendicular to the centerline of a ditch or drainage line.
3. The temporary check dam shall be installed with sufficient spillway depth to prevent flanking of concentrated flow around the ends of the check dam.

Details for an alternative temporary check dam shall be submitted to the Engineer for approval at least 7 days before installation.

When the temporary check dam is no longer required, as determined by the Engineer, it shall be removed and disposed of per Section 7-1.13, "Disposal of Material Outside the Highway Right of Way" of the Standard Specifications.

Ground disturbances including holes and depressions caused by the installation and removal of the temporary check dam shall be backfilled and repaired in conformance with the provisions in Section 5-1-36 "Property and Facility Preservation," of the Standard Specifications.

MAINTENANCE

Temporary check dams shall be maintained to provide sediment holding capacity and to reduce runoff velocities. Split, torn, or unraveling bags shall be repaired or replaced. Broken or split stakes shall be replaced. Locations where rills and other evidence of concentrated runoff have occurred beneath the check dams shall be corrected.

When sediment exceeds 1/3 of the height of the check dam above ground, or when directed by the Engineer, sediment shall be removed. The removed sediment shall be deposited within the project limits so that the sediment is not subject to erosion by wind or by water.

Temporary check dams shall be repaired or replaced the same day damage occurs. Washouts or scour beneath the temporary check dam shall be repaired. Temporary check dams damaged during the progress of work or resulting from the Contractor's vehicles, equipment, or operations shall be repaired or replaced at the Contractor's expense.

MEASUREMENT AND PAYMENT

Temporary check dam is measured by the linear foot along the centerline of the check dams.

The contract price paid per linear foot for "TEMPORARY CHECK DAM (TYPE 2)" shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing temporary check dams, complete in place, including removal of materials, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

10-1.07

OBSTRUCTIONS

Attention is directed to Sections 8-1.10, "Utility and Non-Highway Facilities," and 15, "Existing Highway Facilities" of the Standard Specifications and these Special Provisions.

The existing utilities shown on the plans have been incorporated from atlas drawings provided by the respective utility owner. As-builts for the utilities are not available. The Contractor shall coordinate with the Engineer and shall be responsible for preserving utilities in place and protecting them as necessary.

32" white oak tree at approximately station 18+39 (\pm) left, shall be protected in place. Full compensation for protection in place shall be considered as included in other various items of work as provided for in Section 7-1.11, "Preservation of Property," of the Standard Specifications.

It shall be the responsibility of the Contractor to work with the local utility companies to locate all underground utility facilities within the construction area prior to any excavation work. This requires that the Contractor notify by telephone "Underground Service Alert" at least two business days, but not more than 14 days, prior to commencing any excavation (including erecting stationary mounted construction area signs). Notification Center: Underground Service Alert – USA North Telephone Number: 1-800-227-2600.

The Contractor shall obtain and provide the "Inquire Identification Number" to the Engineer before excavation commences.

It shall be the responsibility of the Contractor to coordinate operations at locations that may require rearrangement of existing utility facilities by others, whether such are rearranged before, during, or after construction is completed.

There are no apparent conflicts with AT&T and Charter facilities. PG&E requires no relocations, but may need to be protected in place. Templeton CSD has facilities within the work zone that will be adjusted by them after construction is complete.

A gas distribution line exists within the work zone. A copy of a letter from The Gas Company is attached to this contract as Attachment B for informational purposes. The following shall be required when working over the gas distribution line;

- 1. The Contractor shall maintain a minimum of 20" of undisturbed cover over the existing gas line at all times and shall pothole along the line to verify the minimum depth of cover is maintained. The potholing shall be performed with a maximum spacing of 100' measured along the gas line.**
- 2. The Contractor shall NOT use heavy vibrating compaction equipment within 24" over the top of the existing gas line.**
- 3. Unless coordinated otherwise with the Gas Company, loading on the existing gas line shall be limited to a maximum pressure of 5,000 lb/sq ft when measured 20 inches above the existing gas line.**

Emergency Contacts:

ATT/SBC/PacBell 908 28 th Street Paso Robles, CA 93446	Steve Plemons Diane Vickers	(805) 237-8131
The Gas Company 1171 More Road (physical) Box 818 (mailing) Goleta, CA 93116-0818	Robert Grosfield Erin Lewis	(805) 681-8025
Pacific Gas & Electric, Los Padres Division 4325 S. Higuera San Luis Obispo, CA 93401	Claire Mastin	(805) 546-3888
Charter Communications 270 Bridge Street San Luis Obispo, CA 93401	Tim Lindsay	(805) 431-3047
Templeton CSD 420 Crocker Street Templeton, CA 93465	Jay Short	(805) 434-4907
AT&T Inquiries 22311 Brookhurst Street Suite 203 Huntington Beach, CA 92646	Joseph Forkert	(714) 963-7964

10-1.08

CONSTRUCTION AREA SIGNS

Construction area signs for temporary traffic control shall be furnished, installed, maintained and removed when no longer required in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these Special Provisions.

Attention is directed to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. Type II retroreflective sheeting shall not be used on construction area sign panels. Type III, IV, VII, VIII, or IX retroreflective sheeting shall be used for stationary mounted construction area sign panels.

Unless otherwise shown on the plans or specified in these Special Provisions, the color of construction area warning and guide signs shall have black legend and border on orange background.

Orange background on construction area signs shall be fluorescent orange.

Repair to construction area sign panels will not be allowed, except when approved by the Engineer. At night time under vehicular headlight illumination, sign panels that exhibit irregular luminance, shadowing or dark blotches shall be immediately replaced at the Contractor's expense.

The Contractor shall notify the appropriate regional notification center for operators of subsurface installations at least 2 working days, but not more than 14 calendar

days, prior to commencing excavation for construction area sign posts. The regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert – Northern California (USA)	(800) 642-2444 (800) 227-2600

Excavations required to install construction area signs shall be performed by hand methods without the use of power equipment, except that power equipment may be used if it is determined there are no utility facilities in the area of the proposed post holes. The post hole diameter, if backfilled with portland cement concrete, shall be at least 4 inches greater than the longer dimension of the post cross section.

Construction area signs placed within 15 feet from the edge of the travel way shall be mounted on stationary mounted sign supports as specified in "Construction Area Traffic Control Devices" of these Special Provisions.

The Contractor shall maintain accurate information on construction area signs. Signs that are no longer required shall be immediately covered or removed. Signs that convey inaccurate information shall be immediately replaced or the information shall be corrected. Covers shall be replaced when they no longer cover the signs properly. The Contractor shall immediately restore to the original position and location any sign that is displaced or overturned, from any cause, during the progress of work.

"CONSTRUCTION AREA SIGNS" will be paid for on a lump sum basis in the manner specified in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications.

10-1.09 TRAFFIC CONTROL SYSTEM

A traffic control system shall consist of closing traffic lanes in conformance with the details shown on the plans, the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications, and these Special Provisions. Attention is directed to the provisions of Section 7-1.08, "Public Convenience," and Section 7-1.09, "Public Safety" of the Standard Specifications and these Special Provisions.

Lane closures are prohibited on Vineyard Drive from 0700 to 0830 and from 1430 to 1800 on weekdays. Lane closures are not permitted on Friday afternoons preceding three-day weekend of a Federal holiday. Lane closures on Vineyard Drive are prohibited on weekends.

The provisions in this section will not relieve the Contractor from the responsibility to provide additional devices or take measures as may be necessary to comply with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

At the conclusion of each work day there shall not be a drop-off along the edge of traveled way greater than 0.15'. The Contractor shall place "LOW SHOULDER" signs along the traveled way where there is drop-off. Drop-offs greater than 0.15' will require back-filling the drop-off to a minimum 4:1 slope.

During traffic stripe operations and pavement marker placement operations using bituminous adhesive, traffic shall be controlled, at the option of the Contractor, with either stationary or moving lane closures. During other operations, traffic shall be controlled with stationary lane closures. Attention is directed to the provisions in Section 84-1.04, "Protection From Damage," and Section 85-1.06, "Placement," of the Standard Specifications.

If components in the traffic control system are displaced or cease to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location.

Streets and roads shall be posted by the Contractor with temporary "NO PARKING" signs on Type II Barricades. Temporary "NO PARKING" signs shall be 12" x 18", and shall display the message "TEMPORARY NO PARKING TOW AWAY" in red letters. Signs shall be posted with the appropriate dates listed, a minimum of 48 hours in advance of doing the work. In the event that a change in sign posting is required due to a change in the Contractor's work schedule, the Contractor shall repost the locations affected at the Contractor's own expense.

STATIONARY LANE CLOSURE

When lane closures are made for work periods only, at the end of each work period, all components of the traffic control system, except portable delineators placed along open trenches or excavation adjacent to the traveled way, shall be removed from the traveled way and shoulder. If the Contractor so elects, the components may be stored at selected central locations designated by the Engineer within the limits of the highway right of way.

One-way traffic shall be controlled through the project in conformance with the plan entitled "Traffic Control System for Lane Closure on Two Lane Conventional Highways" and these Special Provisions.

Utilizing a pilot car will be at the option of the Contractor. If the Contractor elects to use a pilot car, the cones shown along the centerline on the plan need not be placed. The pilot car shall have radio contact with personnel in the work area. The maximum speed of the pilot car through the traffic control zone shall be 25 miles per hour.

Under a 1-way reversing traffic control operation, traffic may be stopped in 1 direction for periods not to exceed 10 minutes. After each stoppage, all accumulated traffic for that direction must pass through the work zone before another stoppage is made.

The maximum length of a single stationary lane closure is 1 mile.

Not more than 1 stationary lane closures will be allowed in each direction of travel at one time. Concurrent stationary closures must be spaced no closer than 1 mile apart.

Moving Lane Closures will not be permitted.

MAINTAINING TRAFFIC

Maintaining traffic shall conform to the provisions in Sections 7-1.08, "Public Convenience," Section 7-1.09, "Public Safety," and Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications.

Public traffic shall be permitted to pass through construction at all times. During the times when men or equipment are actually working within the public roadway, a minimum of one 11-foot wide lane shall be provided for public traffic. At all other times a minimum of two 12-foot wide lanes reasonably smooth and satisfactory for the use of public traffic shall be provided and maintained irrespective of the state of construction. Adequate sight distance for vehicles exiting driveways shall be maintained. In addition, the Contractor shall backfill the excavated shoulder trench to match the edge of pavement on a 4:1 slope. The material shall be compacted in order to provide a temporary shoulder.

The Contractor shall conduct operations in such a manner that access of abutting property owners along the county road is not obstructed. Care will be taken by the Contractor that materials, parked equipment or open trench within the county road right-of-way will not block driveways or other access means used by the adjacent property owners.

TEMPORARY PAVEMENT DELINEATION

Temporary painted traffic stripes and painted pavement markings used for temporary delineation must comply with Section 84-3, "Painted Traffic Stripes and Pavement Markings," of Standard Specifications.

Temporary pavement markers must be the same color as the lane line or centerline markers being replaced. Temporary pavement markers must be temporary pavement markers on the Authorized Material List for short-term day/night use, 14 days or less, or long-term day/night use, 180 days or less. Place temporary pavement markers under the manufacturer's instructions.

Wherever work activities obliterate pavement delineation, place temporary or permanent pavement delineation before opening the traveled way to traffic. Temporary delineators can be used in lieu of channelizers when edgeline is obliterated. Place lane line and centerline pavement delineation for traveled ways open to traffic. On multilane roadways, place edge line delineation for traveled ways open to traffic.

Establish the alignment for the temporary pavement delineation including required lines or markers. Surfaces to receive an application of paint or removable traffic tape must be dry and free of dirt and loose material. Do not apply temporary

pavement delineation over existing pavement delineation or other temporary pavement delineation. Maintain temporary pavement delineation until it is superseded or you replace it with a new pattern of temporary pavement delineation or permanent pavement delineation.

When the Engineer determines the temporary pavement delineation is no longer required for the direction of traffic, remove the temporary pavement markers, underlying adhesive, and removable traffic tape from the final layer of surfacing and from the existing pavement to remain in place. Remove temporary pavement delineation that conflicts with any subsequent or new traffic pattern for the area.

Whenever lane lines or centerlines are obliterated and temporary pavement delineation to replace the lines is not shown, the minimum lane line and centerline delineation must consist of temporary pavement markers placed longitudinally at intervals not exceeding 24 feet. For temporary pavement markers on the Authorized Material List for long-term day/night use, 180 days or less, cement the markers to the surfacing with the adhesive recommended by the manufacturer except do not use epoxy adhesive to place the pavement markers in areas where removal of the markers will be required.

For temporary lane line or centerline delineation consisting entirely of temporary pavement markers on the Authorized Material List for short-term day/night use, 14 days or less, place the markers longitudinally at intervals not exceeding 24 feet. Do not use the markers for more than 14 days on lanes opened to traffic. Place the permanent pavement delineation before the end of the 14 days. If the permanent pavement delineation is not placed within the 14 days, replace the temporary pavement markers with additional temporary pavement delineation equivalent to the pattern specified or shown for the permanent pavement delineation for the area. The County does not pay for the additional temporary pavement delineation.

Temporary delineators can be used for temporary edge line delineation. Cement channelizer bases to the pavement under section 85 for cementing pavement markers to pavement except do not use epoxy adhesive to place channelizers on the top layer of the pavement. Channelizers must be one of the 36-inch, surface-mounted types on the Authorized Material List.

Remove the temporary edge line delineation when the Engineer determines it is no longer required for the direction of traffic.

MEASUREMENT AND PAYMENT

The contract lump sum price paid for "TRAFFIC CONTROL SYSTEM" shall include full compensation for furnishing all labor (except flagging costs), materials (including signs), tools, equipment, and incidentals, and for doing all the work involved in placing, removing, storing, maintaining, moving to new locations, replacing, and disposing of the components of the traffic control system including Temporary Pavement Delineation and for furnishing and operating the pilot car, (including driver, radios, other equipment, and labor required), as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

Flagging Cost will be paid for as provided in Section 12-2.02, "Flagging Cost" of the Standard Specifications.

The adjustment provisions in Section 4-1.03, "Changes," of the Standard Specifications shall not apply to the item of Traffic Control System. Adjustments in compensation for traffic control system will be made only for increased or decreased traffic control system required by changes ordered by the Engineer and will be made on the basis of the cost of the increased or decreased traffic control necessary. The adjustment will be made on a force account basis as provided in Section 9-1.03, "Force Account Payment," of the Standard Specifications for increased work, and estimated on the same basis in the case of decreased work.

10-1.10 EXISTING HIGHWAY FACILITIES

The work performed in connection with various existing highway facilities shall conform to the provisions in Section 15, "Existing Highway Facilities," of the Standard Specifications and these Special Provisions.

10-1.10A REMOVE TRAFFIC STRIPE AND MARKINGS

Remove Traffic Stripe shall consist of the removal of all painted and thermoplastic striping and pavement markings in conformance with the plans, the provisions in Section 15-2.02B, "Remove Traffic Stripe and Pavement Markings," of the Standard Specifications, the provisions under "Traffic Control System" of these Special Provisions, and these Special Provisions.

Traffic stripe and pavement markings shall be removed at the locations shown on the plans and as directed by the Engineer.

Attention is directed to "Construction Site Management" of these Special Provisions.

Waste from removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking contains lead chromate in average concentrations greater than or equal to 5 mg/L Soluble Lead or 1,000 mg/kg Total Lead. Residue produced from the removal of yellow thermoplastic and yellow paint contains heavy metals in concentrations that exceed thresholds established by the California Health and Safety Code and Title 22 of the California Code of Regulations. The Contractor shall assume that the residue is not regulated under the Federal Resource Conservation and Recovery Act (RCRA). Yellow thermoplastic and yellow paint may produce toxic fumes when heated.

The removed yellow thermoplastic and yellow paint shall be disposed of at a Class 1 disposal facility in conformance with the requirements of the disposal facility operator within 10 days after accumulating 220 pounds of residue and dust. The Contractor shall make necessary arrangements to test the yellow thermoplastic and yellow paint residue as required by the disposal facility and these Special Provisions. Testing shall include, at a minimum, (1) Total Lead by EPA Method

6010B and Chromium by EPA Method 7000 series, (2) Soluble Lead and Chromium by California Waste Extraction Test, and (3) Soluble Lead and Chromium by Toxicity Characteristic Leaching Procedure. From the first 222 gallons of waste, or portion thereof if less than 222 gallons of waste are produced, a minimum of four randomly selected samples shall be taken and analyzed individually. Samples shall not be composited. From each additional 888 gallons of waste, or portion thereof if less than 888 gallons are produced, a minimum of one additional random sample shall be taken and analyzed. Each sample shall be homogenized prior to analysis by the laboratory performing the analyses. A sample aliquot sufficient to cover the amount necessary for the total and the soluble analyses shall then be taken. This aliquot shall be homogenized a second time and the total and soluble (if necessary) run on this aliquot. The homogenization process shall not include grinding of the samples. The Contractor shall submit the name and location of the disposal facility and analytical laboratory along with the testing requirements to the Engineer not less than 5 days prior to the start of removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking. The analytical laboratory shall be certified by the Department of Health Services Environmental Laboratory Accreditation Program for all analyses to be performed. Test results shall be provided to the Engineer for review prior to signing a waste profile as requested by the disposal facility, prior to issuing an EPA identification number, and prior to allowing removal of the waste from the site.

The Contractor shall prepare a project specific Lead Compliance Plan to prevent or minimize worker exposure to lead while handling removed yellow thermoplastic and yellow paint residue. Attention is directed to Title 8, California Code of Regulations, Section 1532.1, "Lead," for specific Cal-OSHA requirements when working with lead.

The Lead Compliance Plan shall contain the elements listed in Title 8, California Code of Regulations, Section 1532.1(e)(2)(B). Before submission to the Engineer, the Lead Compliance Plan shall be approved by an Industrial Hygienist certified in Comprehensive Practice by the American Board of Industrial Hygiene. The Plan shall be submitted to the Engineer at least 7 days prior to beginning removal of yellow thermoplastic and yellow paint.

Prior to removing yellow thermoplastic and yellow painted traffic stripe and pavement marking, personnel who have no prior training, including County personnel, shall complete a safety training program provided by the Contractor that meets the requirements of Title 8, California Code of Regulations, Section 1532.1, "Lead," and the Contractor's Lead Compliance Program.

Personal protective equipment, training, and washing facilities required by the Contractor's Lead Compliance Plan shall be supplied to County personnel by the Contractor. The number of County personnel will be 3.

Where grinding or other methods approved by the Engineer are used to remove yellow thermoplastic and yellow painted traffic stripe and pavement marking, the removed residue, including dust, shall be contained and collected immediately. Collection shall be by a high efficiency particulate air (HEPA) filter equipped

vacuum attachment operated concurrently with the removal operations or other equally effective methods approved by the Engineer. The Contractor shall submit a written work plan for the removal, storage, and disposal of yellow thermoplastic and yellow painted traffic stripe and pavement marking to the Engineer for approval not less than 7 days prior to the start of the removal operations. Removal operations shall not be started until the Engineer has approved the work plan.

The removed yellow thermoplastic and yellow painted traffic stripe and pavement marking residue shall be stored and labeled in covered containers. Labels shall conform to the provisions of Title 22, California Code of Regulations, Sections 66262.31 and 66262.32. Labels shall be marked with date when the waste is generated, the words "Hazardous Waste," composition and physical state of the waste (for example, asphalt grindings with thermoplastic or paint), the word "Toxic," the name and address of the Engineer, the Engineer's telephone number, contract number, and Contractor or subcontractor. The containers shall be a type approved by the United States Department of Transportation for the transportation and temporary storage of the removed residue. The containers shall be handled so that no spillage will occur. The containers shall be stored in a secured fenced enclosure at a location within the project limits until disposal, as approved by the Engineer.

If the yellow thermoplastic and yellow painted traffic stripe and pavement marking residue is transported to a Class 1 disposal facility as a hazardous waste, a manifest shall be used, and the transporter shall be registered with the California Department of Toxic Substance Control. The Engineer will obtain the United States Environmental Protection Agency Identification Number and sign all manifests as the generator within 2 working days of receiving sample test results and approving the test methods.

Nothing in these Special Provisions shall relieve the Contractor of the Contractor's responsibilities as specified in Section 7-1.09, "Public Safety," of the Standard Specifications.

MEASUREMENT AND PAYMENT

Full compensation for doing all the work involved in preparing the Lead Compliance Plan, including paying the Certified Industrial Hygienist, and for providing personnel protective equipment, training, air monitoring, and medical surveillance, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the contract prices paid per foot for "REMOVE PAINTED TRAFFIC STRIPE," "REMOVE THERMOPLASTIC TRAFFIC STRIPE" and per square foot for "REMOVE THERMOPLASTIC PAVEMENT MARKING," and no separate payment will be made therefor.

Full compensation for providing a written work plan for the removal, storage, and disposal of yellow thermoplastic and yellow painted traffic stripe and pavement marking shall be considered as included in the contract prices paid per foot for Remove Painted Traffic Stripe, Remove Thermoplastic Traffic Stripe and per

square foot for Remove Thermoplastic Pavement Marking, and no separate Payment will be made therefor.

The contract price paid per linear foot of "REMOVE PAINTED TRAFFIC STRIPE" and "REMOVE THERMOPLASTIC TRAFFIC STRIPE" and per square foot for "REMOVE THERMOPLSTIC MARKING" shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in removing painted traffic stripes, pavement markers and disposal of possible hazardous materials and particulates as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

10-1.10B REMOVE ASPHALT CONCRETE

The existing asphalt concrete surfacing required to be removed for the street improvements shall be saw cut along the line(s) as shown on the plans, broken up and removed. The saw cut shall be a neat vertical cut, no less than 0.2-feet in depth. Care is to be taken to protect the surfacing that is to remain in place.

The Contractor shall be responsible for removal and replacement of any pavement areas damaged beyond the saw-cut line(s) that have been judged by the Engineer to have been damaged by the Contractor's operations. All cost for removal and replacement of such damaged pavement shall be the responsibility of the Contractor, and is not considered as included in the cost paid for, "REMOVE ASPHALT CONCRETE", and no additional compensation shall be allowed therefor.

Some of the asphalt concrete surfacing which is required to be removed shall remain in place as long as necessary for the convenience of handling traffic during construction. The completion of the asphalt concrete surfacing removal shall be scheduled when it becomes necessary to do so.

All of the asphalt concrete material removed shall be considered as excess material and disposed of in accordance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Portable delineators shall be placed at the edge of the sawcut line after pavement has been removed, as directed by the Engineer.

"REMOVE ASPHALT CONCRETE" is a final pay quantity.

Full compensation for saw cutting, removing, and disposing of the asphalt concrete roadway surfacing shall be considered as included in the price paid per square foot for, "REMOVE ASPHALT CONCRETE" and no additional compensation will be allowed therefor.

10-1.10C REMOVE ROADSIDE SIGN

Existing roadside signs, at those locations shown on the plans to be removed, shall be removed and disposed of.

Existing roadside signs shall not be removed until replacement signs have been installed or until the existing signs are no longer required for the direction of public traffic, unless otherwise directed by the Engineer.

“REMOVE ROADSIDE SIGN” will be measured and paid for by the unit in the manner specified in Section 15, “Existing Highway Facilities,” of the Standard Specifications.

10-1.10D REMOVE CULVERT

Existing culverts shall be removed and disposed of in accordance with the provisions in Section 15, “Existing Highway Facilities,” and Section 7-1.13, “Disposal of Material Outside the Highway Right of Way,” of the Standard Specifications.

Remove Culvert shall consist of the removal of the culvert, removal of wood retaining wall, removal of existing head wall in conformance with the plans, the provisions in Section 15-2.02, “Removal Methods” of the Standard Specifications and these Special Provisions.

Culvert shall be removed at the locations shown on the plans, as necessary for construction and as directed by the Engineer. Removal shall include any bedding, subbase, inlet/outlet structure and any other appurtenances to the culvert being removed. Existing asphalt requiring removal falls under the Remove Asphalt Concrete bid item.

Attention is directed to "Construction Site Management" of these Special Provisions.

The contract price paid per linear foot of “REMOVE CULVERT” shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in removing and disposal of culverts, headwall, wood retaining wall outside the right of way at a permitted site and other appurtenances listed above, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and no additional compensation will be allowed therefor.

10-1.10E RESET MAILBOX

Reset Mailbox consists of the relocation of all mailboxes and providing new posts in conformance with the plans, the provisions in Section 15-2.08B “Reset Mailboxes” of the Standard Specifications and these Special Provisions.

Existing mailboxes shall be removed and relocated to the new locations as directed by the Engineer.

There shall be no interruption in service.

Attention is directed to "Construction Site Management" of these Special Provisions.

“RESET MAILBOX” will be measured and paid for by the unit in the manner specified in Section 15, “Existing Highway Facilities,” of Standard Specifications.

10-1.10F RELOCATE ROADSIDE SIGN

Relocate Roadside Sign consists of the relocation of all roadside signs in conformance with the plans, the provisions in 15-2.09C, “Relocate Roadside Signs” of the Standard Specifications and these Special Provisions.

Existing roadside signs shall be removed and relocated to the new locations shown on the plans.

Each roadside sign shall be installed at the new location on the same day that the sign is removed from its original location.

Attention is directed to "Construction Site Management" of these Special Provisions.

“RELOCATE ROADSIDE SIGN” will be measured and paid for by the unit in the manner specified in Section 15, “Existing Highway Facilities,” of Standard Specifications.

10-1.11 EARTHWORK

Earthwork shall conform to the provisions in Section 19, "EARTHWORK" of the Standard Specifications and these Special Provisions.

There is approximately 660 cubic yards of surplus excavated material. Surplus excavated material can be used for shoulder backing and roadway embankment as approved by the Engineer. Surplus excavated material which cannot be utilized in accordance with the provisions in Section 19-2.06, "SURPLUS MATERIAL," shall become the property of the Contractor and shall be disposed of by the Contractor outside the highway right of way in accordance with the provision in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. The Contractor shall take material to a permitted disposal site, or provide proof of waiver from the appropriate Planning Department for an exempt site.

CLEARING AND GRUBBING

"CLEARING AND GRUBBING" shall be considered as included in the various items of work under "Roadway Excavation," as per Section 16-1.06 of the Standard Specifications, and no separate payment will be allowed therefor.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work specified for roadway excavation and embankment construction in Section 19, "Earthwork," of the Standard Specifications, shall be considered as included in the contract price paid per cubic yard for, "ROADWAY EXCAVATION" and no additional compensation will be allowed therefor.

10-1.11A PREPARE SUB-GRADE

Preparing sub-grade shall consist of performing all necessary earthwork items to complete the road widening and driveway conforms for the placement of aggregate base and new asphalt concrete pavement to the line and grades shown on the plans.

Attention is direction to "Obstructions" of these Special Provisions regarding the requirements for work near the existing gas line.

Full compensation for furnishing all labor materials, tools, equipment and incidentals and for doing all the work involved in preparing the sub-grade to complete the road widening and conforms for the placements of aggregate base and new asphalt concrete pavement to the lines and grades shown on the plans, as specified in the Standard Specification and these Special Provisions, shall be considered as included in the contract paid per cubic yard for "ROADWAY EXCAVATION," and no additional compensation will be allowed therefor.

10-1.12 EROSION CONTROL (HYDROSEED)

“Erosion Control (Hydroseed)” shall consist of providing, and placing hydroseed and hydromulch in conformance with the plans, the provisions in Section 21-1.03E “Hydromulch and Hydroseed" of the Standard Specifications and these Special Provisions.

Application rate and mix shall be as follows:

Material		Pounds Per Acre (Slope Measurement)
Seed		20.5
Fiber		2,500
Stabilizing Emulsion (Solids)		60 lbs/150 gallons of water
Seed		
Botanical Name	Common Name	Pounds Pure Live Seed Per Acre (Slope Measurement)
Bromus Carinatus	Cucamonga Brome	20 lbs
Trifolium Tridentatum	Tomcat Clover	4 lbs
Vulpia Microstachys	Small Fescue	8 lbs
*Seed produced in California only.		

Order of work shall add 2” of compost to soil prior to Hydroseed being applied.

MEASUREMENT AND PAYMENT

The contract price paid per acre of “EROSION CONTROL (HYDROSEED)” shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals and for doing all work involved in Erosion Control including seed, compost and track walking, placement of 2” compost overlay, as specified in the

Standard Specifications and the Special Provisions and as directed by the Engineer. The area will be calculated on the basis of actual or computed slope measurements.

10-1.13 2" COMPOST OVERLAY

GENERAL

Summary

This work includes removing and disposing of weeds and incorporating compost into the surface of 2" Compost Overlay areas with a slope of 4:1 (horizontal:vertical) or flatter as shown on the plans.

Comply with Section 20-3, "Erosion Control (Hydroseed)," of the Standard Specifications and these Special Provisions.

Apply compost when an area is ready to receive it as determined by the Engineer.

The Engineer will designate the ground location of all 2" Compost Overlay areas in increments of one acre or smaller by directing the placing of stakes or other suitable markers. Furnish all tools, labor, materials, and transportation required to adequately indicate the various compost (incorporate) locations.

MATERIALS

Compost

The compost producer must be fully permitted as specified under the California Integrated Waste Management Board, Local Enforcement Agencies and any other State and Local Agencies that regulate solid waste facilities. If exempt from State permitting requirements, the composting facility must certify that it follows guidelines and procedures for production of compost meeting the environmental health standards of Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7.

The compost producer must be a participant in the United States Composting Council's Seal of Testing Assurance program.

Compost may be derived from any single or mixture of any of the following feedstock materials:

1. Green material consisting of chipped, shredded, or ground vegetation; or clean processed recycled wood products
2. Biosolids
3. Manure
4. Mixed food waste

Compost feedstock materials such that weed seeds, pathogens and deleterious materials are reduced as specified under Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7, Section 17868.3.

Compost must not be derived from mixed municipal solid waste and must be reasonably free of visible contaminants. Compost must not contain paint, petroleum products, pesticides or any other chemical residues harmful to animal life or plant growth. Compost must not possess objectionable odors.

Metal concentrations in compost must not exceed the maximum metal concentrations listed in Title 14, California Code of Regulations, Division 7, Chapter 3.1, Section 17868.2.

Compost must comply with the following:

Physical and Chemical Requirements

Property	Test Method	Requirement
pH	TMECC 04.11-A Elastometric pH 1:5 Slurry Method pH Units	6.0–8.0
Soluble Salts	TMECC 04. 1 O-A Electrical Conductivity 1:5 Slurry Method dS/m (mmhos/cm)	0-10.0
Moisture Content	TMECC 03.09-A Total Solids & Moisture at 70+/- 5 deg C % Wet Weight Basis	30-60
Organic Matter Content	TMECC 05.07-A Loss-On-Ignition Organic Matter Method (LOI) % Dry Weight Basis	30-65
Maturity	TMECC 05.05-A Germination and Vigor Seed Emergence Seedling Vigor % Relative to Positive Control	80 or Above 80 or Above
Stability	TMECC 05.08-B Carbon Dioxide Evolution Rate mg CO ₂ -C/g OM per day	8 or below
Particle Size	TMECC 02.02-B Sample Sieving for Aggregate Size Classification % Dry Weight Basis	Inches % Passing 3 99% 3/8 < 25% Max. Length 4 inches
Pathogen	TMECC 07.01-B Fecal Coliform Bacteria < 1000 MPN/gram dry wt.	Pass
Pathogen	TMECC 07.01-B Salmonella < 3 MPN/4 grams dry wt.	Pass
Physical Contaminants	TMECC 02.02-C Man Made Inert Removal and Classification: Plastic, Glass and Metal % > 4mm fraction	Combined Total: < 1.0

Physical Contaminants	TMECC 02.02-C Man Made Inert Removal and Classification: Sharps (Sewing needles, straight pins and hypodermic needles) % > 4mm fraction	None Detected
-----------------------	--	---------------

NOTE: TMECC refers to "Test Methods for the Examination of Composting and Compost," published by the United States Department of Agriculture and the United States Compost Council (USCC).

Before compost application, submit a copy of the compost producer's compost technical data sheet and a copy of the compost producers Seal of Testing Assurance certification. The compost technical data sheet must include:

1. Laboratory analytical test results
2. List of product ingredients

Before compost application, submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

CONSTRUCTION

Site Preparation

Immediately prior to applying compost to compost (Incorporate) areas, remove trash, debris and weeds.

Removed weeds must be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

MEASUREMENT AND PAYMENT

Payment for 2" Compost Overlay shall be included in the Contract unit price for "EROSION CONTROL (HYDROSEED)" and no separate payment will be made therefor.

10-1.14 CLASS 2 AGGREGATE BASE

Aggregate base must comply with Section 26, "Aggregate Bases," of the Standard Specifications and these Special Provisions.

Aggregate base must be Class 2.

Do not store reclaimed asphalt concrete or aggregate base with reclaimed asphalt concrete within 100 feet measured horizontally of any culvert, watercourse or bridge.

"CLASS 2 AGGREGATE BASE" will be measured and paid for by the cubic yard in the manner specified in Section 26, "Aggregate Bases," of the Standard Specifications.

10-1.15 FOG SEAL COAT

Fog Seal Coat shall consist of providing and placing asphaltic emulsion fog seal coat in conformance with the plans, the provisions in Section 37, "Bituminous Seals," of the Standard Specifications and these Special Provisions.

Fog Seal Coat shall be spread at a rate of 0.04 gallons per square yard.

Apply asphaltic emulsion when the ambient air temperature is from 65 to 110 degrees F and the pavement surface temperature is at least 80 degrees F.

The contract price paid per square foot of "FOG SEAL COAT" shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals and for doing all work involved in Fog Seal Coat as specified in the Standard Specifications and the Special Provisions and as directed by the Engineer.

10-1.16 HOT MIX ASPHALT (TYPE A)
GENERAL

Hot Mix Asphalt (HMA) shall be Type A using the Method process and shall conform to the provisions in Section 39, "Hot Mix Asphalt," of the Standard Specifications and these Special Provisions.

The grade of asphalt binder to be mixed with aggregate for HMA Type A shall be Performance Grade PG 64-10 and shall conform to the provisions in Section 92, "Asphalts," of the Standard Specifications.

The aggregate for HMA Type A shall comply with the 3/4-inch maximum grading.

All Job Mix Formulas in accordance with Section 39-1.03, "Hot Mix Asphalt Mix Design Requirements," of the Standard Specifications shall be submitted within 15 calendar days, not including Saturdays, Sundays, and legal holidays of the Engineer's request.

The first paragraph of Section 39-1.07, "Production Start-up Evaluation," of the Standard Specifications is modified to read: "The Engineer evaluates HMA production and placement at start-up or at any location agreed upon at least 3 business days in advance."

In addition to the requirements of Section 39-2.02B, "Quality Control Testing," of the Standard Specifications, the Contractor shall submit QC test reports to the Engineer on Caltrans Form CEM 3501 within 2 days of production.

In addition to the requirements of Sections 6-1.04, "Defective Materials," 39-2.03A, "Testing," and 39-3.02A, "Testing," of the Standard Specifications, a credit to the County of \$5 per ton, at the discretion of the Engineer, will be taken for each ton of HMA represented by acceptance tests that do not comply with these provisions.

Item 1 of the third paragraph of Sections 39-2.03A and 39-3.02A, "Testing," of the Standard Specifications is hereby modified to read: "Stop production if directed by the Engineer."

CONSTRUCTION

Vertical Joints

Longitudinal vertical joints are not allowed on the traveled way open to traffic, regardless of thickness. Place HMA on adjacent traveled way lanes so that at the end of each work shift, the distance between the ends of HMA layers on adjacent lanes is between 5 feet and 10 feet. Place additional HMA along the transverse edge at each lane's end and along the exposed longitudinal edges between adjacent lanes. Hand rake and compact the additional HMA to form temporary conforms. Kraft paper or another approved bond breaker may be placed under the conform tapers to facilitate the taper removal when paving operations resume.

Do not leave a vertical joint more than 0.15 foot high between driveways and adjacent lanes.

Smoothness

The first paragraph 39-1.12A is hereby modified to read: "Determine HMA smoothness with a straightedge."

Section 30-1.12C, "Profilograph", of the Standard Specifications shall not apply.

The fourth paragraph of Section 39-1.12D, "Smoothness Correction", is hereby modified to read: "After grinding, measure the ground HMA pavement surface with a 12-foot straightedge until the pavement is within specified tolerances. If straightedged pavement cannot be ground to within specified tolerances, remove and replace the pavement."

Compaction Testing

Relative density of HMA of 0.15 foot or more, and in widths 5 feet or more will be determined by nuclear gage in backscatter mode in accordance with California Test 375.

Section 39-1.04F, "Cores," of the Standard Specification is hereby deleted.

The first paragraph of Section 39-1.07, "Production Start-up Evaluation," of the Standard Specifications is hereby modified to read: "The Engineer evaluates HMA production and placement at start-up or at any location agreed upon at least 3 business days in advance."

The fourth and fifth paragraphs of Section 39-2.03A, "Testing," of the Standard Specifications are hereby modified to read:

"The Engineer determines the percent of maximum theoretical density of the HMA in 500 ton lots, using a calibrated nuclear gauge, with a minimum of ten tests per lot. The Engineer will provide the Contractor the final results of the nuclear gauge

tests based on the maximum theoretical density of that day's production within 24 hours. If the maximum theoretical density results for any day's production are not available by the end of shift, the Engineer will provide the Contractor preliminary results based on the maximum theoretical density of a previous day's material.

If the relative compaction of any lot, based on the calibrated nuclear gauge, is less than 89%, or greater than 99%, the Contractor shall take two cores from each 500 ton lot at random locations designated by the Engineer, in accordance with the procedures specified above. The Engineer determines the percent of maximum theoretical density for each core by determining the core's density and dividing by the maximum theoretical density. The average percent of maximum theoretical density of the two cores will be considered final for determining removal and replacement requirements."

MEASUREMENT AND PAYMENT

"HOT MIX ASPHALT (TYPE A)" will be measured and paid for by the ton in the manner specified in Section 39, "Hot Mix Asphalt," of the Standard Specifications.

Full compensation for tack coat shall be considered as included in the contract price paid per ton for "HOT MIX ASPHALT (TYPE A)" and no additional compensation will be allowed therefor.

10-1.17 HOT MIX ASPHALT (MISCELLANEOUS AREA)

This work includes producing hot mix asphalt (HMA), placing it at driveway conforms and as directed by the Engineer.

Comply with Section 39, "Hot Mix Asphalt," of the Standard Specifications.

Place Hot Mix Asphalt (Miscellaneous Area) is limited to the areas listed on the plans, as directed by the Engineer, and is in addition to the contract items for the materials involved.

MEASUREMENT AND PAYMENT

"PLACE HOT MIX ASPHALT (MISCELLANEOUS AREA)" will be measured and paid for by the square yard (measured as the in-place compacted area) in the manner specified in Section 39, "Hot Mix Asphalt," of the Standard Specifications, in addition to the price paid for material involved under the contract price per ton for "HOT MIX ASPHALT (TYPE A)".

Full compensation for tack coat for miscellaneous areas is considered as included in the contract price paid per ton for the hot mix asphalt used in miscellaneous areas and no separate payment will be made therefor.

10-1.18 ROADSIDE SIGN, ONE POST

Roadside signs shall be furnished and installed at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in

Section 56-2, "Roadside Signs," of the Standard Specifications and these Special Provisions.

The Contractor shall furnish roadside sign panels in conformance with the provisions in "Furnish Sign" of these Special Provisions. Contractor to provide Certificate of Compliance to Engineer prior to placement.

Wood posts shall be pressure treated after fabrication in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," of the Standard Specifications and AWWA Use Category System: UC4A, Commodity Specification A or B.

The quantity of Roadside Sign, One Post to be paid for will be measured by the count of each sign. All roadside signs designated on the plans, regardless of size or mounting type shall be counted in Roadside Sign, One Post bid item.

"ROADSIDE SIGN, ONE POST" will be measured and paid for by the unit in the manner specified in Section 56-2,"Roadside Signs," of the Standard Specifications.

10-1.19 FURNISH SIGN

Signs shall be fabricated and furnished in accordance with details shown on the plans, the Traffic Sign Specifications, and these Special Provisions.

Traffic Sign Specifications for California sign codes are available for review at:

<http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm>

Traffic Sign Specifications for signs referenced with Federal MUTCD sign codes can be found in Standard Highway Signs Book, administered by the Federal Highway Administration, which is available for review at:

http://mutcd.fhwa.dot.gov/ser-shs_millennium.htm

Information on cross-referencing California sign codes with the Federal MUTCD sign codes is available at:

<http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm>

Temporary or permanent signs shall be free from blemishes that may affect the serviceability and detract from the general sign color and appearance when viewing during daytime and nighttime from a distance of 25 feet. The face of each finished sign shall be uniform, flat, smooth, and free of defects, scratches, wrinkles, gel, hard spots, streaks, extrusion marks, and air bubbles. The front, back, and edges of the sign panels shall be free of router chatter marks, burns, sharp edges, loose rivets, delaminated skins, excessive adhesive over spray and aluminum marks.

QUALITY CONTROL FOR SIGNS

The requirements of "Quality Control for Signs" in this section shall not apply to construction area signs.

No later than 14 days before sign fabrication, the Contractor shall submit a written copy of the quality control plan for signs to the Engineer for review. The Engineer will have 10 days to review the quality control plan. Sign fabrication shall not begin until the Engineer approves the Contractor's quality control plan in writing. The Contractor shall submit to the Engineer at least 3 copies of the approved quality control plan. The quality control plan shall include, but not be limited to the following requirements:

- A. Identification of the party responsible for quality control of signs,
- B. Basis of acceptance for incoming raw materials at the fabrication facility,
- C. Type, method and frequency of quality control testing at the fabrication facility,
- D. List (by manufacturer and product name) of process colors, protective overlay film, retroreflective sheeting and black non-reflective film,
- E. Recommended cleaning procedure for each product, and
- F. Method of packaging, transport and storage for signs.

No legend shall be installed at the project site. Legend shall include letters, numerals, tildes, bars, arrows, route shields, symbols, logos, borders, artwork, and miscellaneous characters. The style, font, size, and spacing of the legend shall conform to the Standard Alphabets published in the FHWA Standard Highway Signs Book. The legend shall be oriented in the same direction in accordance with the manufacturer's orientation marks found on the retroreflective sheeting.

On multiple panel signs, legend shall be placed across joints without affecting the size, shape, spacing, and appearance of the legend. Background and legend shall be wrapped around interior edges of formed panel signs as shown on plans to prevent delamination.

The following notation shall be placed on the lower right side of the back of each sign where the notation will not be blocked by the sign post or frame:

- A. PROPERTY OF COUNTY OF SAN LUIS OBISPO,
- B. Name of the sign manufacturer,
- C. Month and year of fabrication,
- D. Type of retroreflective sheeting, and
- E. Manufacturer's identification and lot number of retroreflective sheeting.

The above notation shall be applied directly to the aluminum sign panels in 1/4-inch upper case letters and numerals by die-stamp and applied by similar method to the fiberglass reinforced plastic signs. Painting, screening, or engraving the notation will not be allowed. The notation shall be applied without damaging the finish of the sign.

Signs with a protective overlay film shall be marked with a dot of 3/8 inch in diameter. The dot placed on white border shall be black, while the dot placed on black border shall be white. The dot shall be placed on the lower border of the sign before application of the protective overlay film and shall not be placed over the legend and bolt holes. The application method and exact location of the dot shall be determined by the manufacturer of the signs.

For sign panels that have a minor dimension of 48 inches or less, no splice will be allowed in the retroreflective sheet except for the splice produced during the manufacturing of the retroreflective sheeting. For sign panels that have a minor dimension greater than 48 inches, only one horizontal splice will be allowed in the retroreflective sheeting.

Unless specified by the manufacturer of the retroreflective sheeting, splices in retroreflective sheeting shall overlap by a minimum of one inch. Splices shall not be placed within 2 inches from edges of the panels. Except at the horizontal borders, the splices shall overlap in the direction from top to bottom of the sign to prevent moisture penetration. The retroreflective sheeting at the overlap shall not exhibit a color difference under the incident and reflected light.

Signs exhibiting a significant color difference between daytime and nighttime shall be replaced immediately.

Repairing sign panels will not be allowed except when approved by the Engineer.

Regardless of kind, size, type, or whether delivered by the Contractor or by a common carrier, signs shall be protected by thorough wrapping, tarping, or other methods to ensure that signs are not damaged by weather conditions and during transit. Signs shall be dry during transit and shipped on palettes, in crates, or tier racks. Padding and protective materials shall be placed between signs as appropriate. Finished sign panels shall be transported and stored by method that protects the face of signs from damage. The Contractor shall replace wet, damaged, and defective signs.

Signs shall be stored in dry environment at all times. Signs shall not rest directly on the ground or become wet during storage. Signs, whether stored indoor or outdoor, shall be free standing. In areas of high heat and humidity signs shall be stored in enclosed climate-controlled trailers or containers. Signs shall be stored indoor if duration of the storage will exceed 30 days.

Screen processed signs shall be protected, transported and stored as recommended by the manufacturer of the retroreflective sheeting.

When requested, the Contractor shall provide the Engineer test samples of signs and materials used at various stages of production. Sign samples shall be 12" x 12" in size with applied background, letter or numeral, and border strip.

The Contractor shall assume the costs and responsibilities resulting from the use of patented materials, equipment, devices, and processes for the Contractor's work.

SHEET ALUMINUM

Alloy and temper designations for sheet aluminum shall be in accordance with ASTM Designation: B 209.

The Contractor shall furnish the Engineer a Certificate of Compliance in conformance with Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the sheet aluminum.

Sheet aluminum shall be pretreated in accordance to ASTM Designation: B 449. Surface of the sheet aluminum shall be cleaned, deoxidized, and coated with a light and tightly adherent chromate conversion coating free of powdery residue. The conversion coating shall be Class 2 with a weight between 10 milligrams per square foot and 35 milligrams per square foot, and an average weight of 25 milligrams per square foot. Following the cleaning and coating process, the sheet aluminum shall be protected from exposure to grease, oils, dust, and contaminants.

Sheet aluminum shall be free of buckles, warps, dents, cockles, burrs, and defects resulting from fabrication.

Base plate for standard route marker shall be die cut.

RETROREFLECTIVE SHEETING

The Contractor shall furnish retroreflective sheeting for sign background and legend in conformance with ASTM Designation: D 4956 and "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Retroreflective sheeting shall be applied to sign panels as recommended by the retroreflective sheeting manufacturer without stretching, tearing, and damage.

Class 1, 3, or 4 adhesive backing shall be used for Type II, III, IV, VII, VIII, and IX retroreflective sheeting. Class 2 adhesive backing may also be used for Type II retroreflective sheeting. The adhesive backing shall be pressure sensitive and fungus resistant.

When the color of the retroreflective sheeting determined from instrumental testing is in dispute, the Engineer's visual test will govern.

PROCESS COLOR AND FILM

The Contractor shall furnish and apply screened process color, non-reflective opaque black film, and protective overlay film of the type, kind, and product that are approved by the manufacturer of the retroreflective sheeting.

The Contractor shall furnish the Engineer a Certificate of Compliance in accordance to Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for

the screened process color, non-reflective opaque black film, and protective overlay film.

The surface of the screened process color shall be flat and smooth. When the screened process colors determined from the instrumental testing in accordance to ASTM Designation: D 4956 are in dispute, the Engineer's visual test will govern.

The Contractor shall provide patterns, layouts, and set-ups necessary for the screened process.

The Contractor may use green, red, blue, and brown reverse-screened process colors for background and non-reflective opaque black film or black screened process color for legend. The coefficient of retroreflection for reverse-screened process colors on white retroreflective sheeting shall not be less than 70 percent of the coefficient of retroreflection specified in ASTM Designation: D 4956.

The screened process colors and non-reflective opaque black film shall have the same outdoor weatherability as that of the retroreflective sheeting.

After curing, screened process colors shall withstand removal when tested by applying 3M Company Scotch Brand Cellophane Tape No. 600 or equivalent tape over the color and removing with one quick motion at 90° angle.

SINGLE SHEET ALUMINUM SIGN

Single sheet aluminum signs shall be fabricated and furnished with or without frame. The Contractor shall furnish the sheet aluminum in accordance to "Sheet Aluminum" of these special provisions. Single sheet aluminum signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H38.

Single Sheet aluminum signs shall not have a vertical splice in the sheet aluminum. For signs with depth greater than 48 inches, one horizontal splice will be allowed in the sheet aluminum.

Framing for single sheet aluminum signs shall consist of aluminum channel or rectangular aluminum tubing. The framing shall have a length tolerance of $\pm 1/8$ inch. The face sheet shall be affixed to the frame with rivets of 3/16-inch diameter. Rivets shall be placed within the web of channels and shall not be placed less than 1/2 inch from edges of the sign panels. Rivets shall be made of aluminum alloy 5052 and shall be anodized or treated with conversion coating to prevent corrosion. The exposed portion of rivets on the face of signs shall be the same color as the background or legend where the rivets are placed.

Finished signs shall be flat within a tolerance of $\pm 1/32$ inch per linear foot when measured across the plane of the sign in all directions. The finished signs shall have an overall tolerance within $\pm 1/8$ inch of the detailed dimensions.

Aluminum channels or rectangular aluminum tubings shall be welded together with the inert gas shielded-arc welding process using E4043 aluminum electrode filler

wires as shown on the plans. Width of the filler shall be equal to wall thickness of smallest welded channel or tubing.

PAYMENT

Full compensation for furnishing signs (except for construction area signs) shall be considered as included in the contract unit price paid for "ROADSIDE SIGN – ONE POST" and no additional compensation will be allowed therefor.

10-1.20

THERMOPLASTIC PAVEMENT MARKINGS

Thermoplastic pavement markings shall consist of providing and placing Thermoplastic Pavement Markings, in conformance with the plans, the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these Special Provisions.

For each batch of thermoplastic material for traffic stripes and pavement markings, the Contractor shall submit to the Engineer:

1. Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications
2. Department's Materials Engineering and Testing Services notification letter stating that the material is approved for use
3. Material Safety Data Sheet

Thermoplastic material shall be free of lead and chromium, and shall conform to the requirements in State Specification PTH-02ALKYD.

Retroreflectivity of the thermoplastic traffic stripes and pavement markings shall conform to the requirements in ASTM Designation: D 6359-99. White thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 250 mcd m⁻² lx⁻¹. Yellow thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 150 mcd m⁻² lx⁻¹.

Where striping joins existing striping, as shown on the plans, the Contractor shall begin and end the transition from the existing striping pattern into or from the new striping pattern a sufficient distance to ensure continuity of the striping pattern.

Thermoplastic traffic stripes shall be applied at the minimum thickness and application rate as specified below. The minimum application rate is based on a solid stripe of 4 inches in width.

Minimum Stripe Thickness (inch)	Minimum Application Rate (lb/ft)
0.080	0.27

Thermoplastic traffic stripes and pavement markings shall be free of runs, bubbles, craters, drag marks, stretch marks, and debris.

At the option of the Contractor, and pavement marking tape conforming to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these Special Provisions may be placed instead of the thermoplastic pavement markings specified herein. Permanent tape, if used, shall be installed in conformance with the manufacturer's specifications.

If permanent tape is placed instead of thermoplastic pavement markings, the tape will be measured and paid for by the square foot as thermoplastic pavement marking.

"THERMOPLASTIC PAVEMENT MARKINGS" will be measured and paid for by the square foot in the manner specified in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications.

10-1.21 PAVEMENT MARKERS

Pavement markers shall be placed in conformance with the provisions in Section 85, "Pavement Markers," of the Standard Specifications and these Special Provisions.

Attention is directed to "Traffic Control System For Lane Closure" of these Special Provisions regarding the use of moving lane closures during placement of pavement markers with bituminous adhesive.

The Contractor shall furnish the Engineer certificates of compliance for the pavement markers in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Retroreflective pavement markers shall be marked as abrasion resistant on the body of the markers.

"PAVEMENT MARKERS (RETROREFLECTIVE)" will be measured and paid for by the unit in the manner specified in Section 85, "Pavement Markers," of the Standard Specifications.

10-1.22 PAINT TRAFFIC STRIPE

Painted traffic stripes (traffic lines) shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these Special Provisions.

For each batch of paint for traffic stripes, the Contractor shall submit to the Engineer:

1. Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications
2. Department's Materials Engineering and Testing Services notification letter stating that the material is approved for use

3. Material Safety Data Sheet

Traffic stripe paint shall conform to the requirements in State Specification No. PTWB-01.

The color of the painted traffic stripes shall conform to the requirements in ASTM Designation: D 6628-01.

Within 14 days of applying a painted traffic stripe, the retroreflectivity of the traffic stripe or pavement marking shall be a minimum of 250 millicandelas per square meter per lux for white, and 150 millicandelas per square meter per lux for yellow. The Contractor shall test the retroreflectivity under ASTM E 1710.

“PAINT TRAFFIC STRIPE (2 COAT)” will be measured and paid for by the linear for in the manner specified in Section 84, “Painted Stripes and Pavement Markings,” of the Standard Specifications.

THIS PAGE LEFT BLANK INTENTIONALLY

SECTION 11. AMENDMENTS TO STANDARD SPECIFICATIONS

SECTION 5 CONTROL OF WORK

(Issued 06-10-10)

Add:

5-1.055 SUBCONTRACTING

5-1.055A General

No subcontract releases you from the contract or relieves you of your responsibility for a subcontractor's work.

If you violate Pub Cont Code § 4100 et seq., the Department may exercise the remedies provided under Pub Cont Code § 4110. The Department may refer the violation to the Contractors State License Board as provided under Pub Cont Code § 4111.

Except for a building-construction non-federal-aid contract, perform work equaling at least 30 percent of the value of the original total bid with your employees and with equipment owned or rented by you, with or without operators.

Each subcontract must comply with the contract.

The Department encourages you to include a dispute resolution process in each subcontract.

Each subcontractor must have an active and valid State contractor's license with a classification appropriate for the work to be performed (Bus & Prof Code, § 7000 et seq.).

Submit copies of subcontracts upon request.

Before subcontracted work starts, submit a Subcontracting Request form.

Do not use a debarred contractor; a current list of debarred contractors is available at the Department of Industrial Relations' Web site.

Upon request, immediately remove and not again use a subcontractor who fails to prosecute the work satisfactorily.

5-1.116 DIFFERING SITE CONDITIONS (23 CFR 635.109)

5-1.116A Contractor's Notification

Promptly notify the Engineer if you find either of the following:

1. Physical conditions differing materially from either of the following:
 - 1.1. Contract documents
 - 1.2. Job site examination
2. Physical conditions of an unusual nature, differing materially from those ordinarily encountered and generally recognized as inherent in the work provided for in the contract

Include details explaining the information you relied on and the material differences you discovered.

If you fail to notify the Engineer promptly, you waive the differing site condition claim for the period between your discovery of the differing site condition and your notification to the Engineer.

If you disturb the site after discovery and before the Engineer's investigation, you waive the differing site condition claim.

5-1.116B Engineer's Investigation and Decision

Upon your notification, the Engineer investigates job site conditions and:

1. Notifies you whether to resume affected work
2. Decides whether the condition differs materially and is cause for an adjustment of time, payment, or both

You may protest the Engineer's decision.

SECTION 6 CONTROL OF MATERIALS (Issued 05-01-09)

Replace Section 6-1.05 with:

6-1.05 SPECIFIC BRAND OR TRADE NAME AND SUBSTITUTION

A reference to a specific brand or trade name establishes a quality standard and is not intended to limit competition. You may use a product that is equal to or better than the specified brand or trade name if approved.

Submit a substitution request within a time period that:

1. Follows Contract award
2. Allows 30 days for review
3. Causes no delay

Include substantiating data with the substitution request that proves the substitution:

1. Is of equal or better quality and suitability
2. Causes no delay in product delivery and installation

6-1.075 GUARANTEE

Guarantee the work remains free from substantial defects for 1 year after contract acceptance except for work parts for which you were relieved of maintenance and protection. Guarantee each of these relieved work parts for 1 year after the relief date.

The guarantee excludes damage or displacement caused by an event outside your control including:

1. Normal wear and tear
2. Improper operation
3. Insufficient maintenance
4. Abuse
5. Unauthorized change
6. Act of God

During the guarantee period, repair or replace each work portion having a substantial defect.

The Department does not pay for corrective work.

During corrective work activities, provide insurance coverage specified for coverage before contract acceptance.

The contract bonds must be in full force and effect until the later of:

1. Expiration of guarantee period
2. Completion of corrective work

If a warranty specification conflicts with Section 6-1.075, "Guarantee," comply with the warranty specification.

During the guarantee period, the Engineer monitors the completed work. If the Engineer finds work having a substantial defect, the Engineer lists work parts and furnishes you the list.

Within 10 days of receipt of the list, submit for authorization a detailed plan for correcting the work. Include a schedule that includes:

1. Start and completion dates
2. List of labor, equipment, materials, and any special services you plan to use
3. Work related to the corrective work, including traffic control and temporary and permanent pavement markings

The Engineer notifies you when the plan is authorized. Start corrective work and related work within 15 days of notice.

If the Engineer determines corrective work is urgently required to prevent injury or property damage:

1. The Engineer furnishes you a request to start emergency repair work and a list of parts requiring corrective work
2. Mobilize within 24 hours and start work
3. Submit a corrective work plan within 5 days of starting emergency repair work

If you fail to perform work as specified, the Department may perform the work and bill you.

SECTION 9 MEASUREMENT AND PAYMENT

(Issued 03-11-10)

In Section 9-1.03A replace the 2nd paragraph with:

To the total of the direct costs computed as provided in Sections 9-1.03A(1), "Labor," 9-1.03A(2), "Materials," and 9-1.03A(3), "Equipment Rental," there will be added a markup of 35

percent to the cost of labor, 15 percent to the cost of materials, and 15 percent to the cost of equipment rental.

In Section 9-1.03A replace the 4th paragraph with:

If a subcontractor performs work at force account, accept an additional 10 percent markup to the total cost of that work paid at force account, including markups specified in Section 9-1.03, "Force Account Payment," as reimbursement for additional administrative costs.

Replace Section 9-1.03B with:

The Contractor, and all subcontractors obtained before or after contract execution, shall itemize the labor, material, and equipment rental costs, and shall not be deemed specialists unless the selected Contractor or available subcontractors on site are not capable of performing the specialty work and it is not the special service industry's established practice to provide cost itemization. In addition, the Engineer may approve work required to be performed at an off-site manufacturing plant or machine shop to be paid as a non-itemized specialist billing. To obtain approval as a specialist, the Contractor shall submit on behalf of the subcontractor a request to the Engineer prior to the start of the proposed specialist work.

If approval is granted, the Engineer will accept the non-itemized invoices for specialty work performed, provided the invoices are at current market rates. Markup percentages of Section 9-1.03A, "Work Performed by Contractor," will not apply. A markup of 10 percent will be added to the total cost of the extra work. The 10 percent markup shall reimburse the Contractor for additional administrative costs, and no other payment will be made by reason of performance of the extra work by a specialist.

If approval is not granted prior to the start of the proposed specialty work, the Contractor or subcontractor shall itemize labor, material, and equipment rental costs and apply percentage markups as required by Section 9-1.03A, "Work Performed by Contractor."

In Section 9-1.03C delete the 6th paragraph.

SECTION 12 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES

(Issued 11-07-08)

In Section 12-1.01 in the 2nd paragraph, replace the 1st sentence with:

Attention is directed to Part 6 of the California MUTCD.

Replace Section 12-2.01 with:

12-2.01 FLAGGERS

Flaggers while on duty and assigned to traffic control or to give warning to the public that the highway is under construction and of any dangerous conditions to be encountered as a result thereof, shall perform their duties and shall be provided with the necessary equipment in

conformance with Part 6 of the California MUTCD. The equipment shall be furnished and kept clean and in good repair by the Contractor at the Contractor's expense.

All flaggers shall wear safety apparel meeting the requirements of ANSI/ISEA 107-2004 for Class 2 or 3 garment and complying with 71 Fed Reg 67792.

In Section 12-3.01 replace the 1st paragraph with:

In addition to the requirements in Part 6 of the California MUTCD, all devices used by the Contractor in the performance of the work shall conform to the provisions in this Section 12-3.

In Section 12-3.06 in the 1st paragraph, replace the 2nd sentence with:

Construction area signs are shown in or referred to in Part 6 of the California MUTCD.

In Section 12-3.06 in the 4th paragraph, replace the 1st sentence with:

All construction area signs shall conform to the dimensions, color and legend requirements of the plans, Part 6 of the California MUTCD and these specifications.

In Section 12-3.06 in the 8th paragraph, replace the 1st sentence with:

Used signs with the specified sheeting material will be considered satisfactory if they conform to the requirements for visibility and legibility and the colors conform to the requirements in Part 6 of the California MUTCD.

SECTION 14 (BLANK)

(Issued 06-05-09)

Replace Section 14 with:

SECTION 14 ENVIRONMENTAL STEWARDSHIP

14-1 GENERAL

14-1.01 GENERAL

Environmental stewardship includes both environmental compliance and environmental resource management.

If an ESA is shown on the plans:

1. The boundaries shown are approximate; the Department marks the exact boundaries on the ground
2. Do not enter the ESA unless authorized
3. If the ESA is breached, immediately:
 - 3.1. Secure the area and stop all operations within 60 feet of the ESA boundary
 - 3.2. Notify the Engineer
4. If the ESA is damaged, the Department determines what efforts are necessary to remedy the damage and who performs the remedy; you are responsible for remedies and charges.

14-2 CULTURAL RESOURCES

14-2.01 GENERAL

Reserved

14-2.02 ARCHAEOLOGICAL RESOURCES

If archaeological resources are discovered at the job site, do not disturb the resources and immediately:

1. Stop all work within a 60-foot radius of the discovery
2. Protect the discovery area
3. Notify the Engineer

The Department investigates. Do not take archaeological resources from the job site. Do not resume work within the discovery area until authorized.

If, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of an archaeological find, or investigation or recovery of archeological materials, you will be compensated for resulting losses, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

If ordered, furnish resources to assist in the investigation or recovery of archaeological resources. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

14-2.03 ARCHAEOLOGICAL MONITORING AREA

Section 14-2.03 applies if an AMA is described in the Contract.

The Department assigns an archaeological monitor to monitor job site activities within the AMA. Do not work within the AMA unless the archeological monitor is present.

The Engineer and the Department archaeological monitor conduct an AMA location field review with you at least 5 business days before start of work. The Department marks the exact boundaries of the AMA on the ground.

If temporary fence (Type ESA) for an AMA is described in the Contract, install temporary fence (Type ESA) to define the boundaries of the AMA during the AMA location field review.

At least 5 business days before starting work within an AMA, submit a schedule of days and hours to be worked for the Engineer's approval. If you require changes in the schedule, submit an update for the Engineer's approval at least 5 business days before any changed work day.

If archaeological resources are discovered within an AMA, comply with Section 14-2.02, "Archaeological Resources."

14-2.04 HISTORIC STRUCTURES

Reserved

14-3 COMMUNITY IMPACTS AND ENVIRONMENTAL JUSTICE

Reserved

14-4 NATIVE AMERICAN CONCERNS

Reserved

14-5 AESTHETICS

Reserved

14-6 BIOLOGICAL RESOURCES

14-6.01 GENERAL

Reserved

14-6.02 BIRD PROTECTION

Protect migratory and nongame birds, their occupied nests, and their eggs.

The Department anticipates nesting or attempted nesting from February 15 to September 1.

The federal Migratory Bird Treaty Act, 16 USC § 703–711, and 50 CFR Pt 10 and Fish & Game Code §§ 3503, 3513, and 3800 protect migratory and nongame birds, their occupied nests, and their eggs.

The federal Endangered Species Act of 1973, 16 USC §§ 1531 and 1543, and the California Endangered Species Act, Fish & Game Code §§ 2050–2115.5, prohibit the take of listed species and protect occupied and unoccupied nests of threatened and endangered bird species.

The Bald and Golden Eagle Protection Act, 16 USC § 668, prohibits the destruction of bald and golden eagles and their occupied and unoccupied nests.

If migratory or nongame bird nests are discovered that may be adversely affected by construction activities or an injured or killed bird is found, immediately:

1. Stop all work within a 100-foot radius of the discovery.
2. Notify the Engineer.

The Department investigates. Do not resume work within the specified radius of the discovery until authorized.

When ordered, use exclusion devices, take nesting prevention measures, remove and dispose of partially constructed and unoccupied nests of migratory or nongame birds on a regular basis to prevent their occupation, or perform any combination of these. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

Prevent nest materials from falling into waterways.

Bird protection that causes a delay to the controlling activity is a condition unfavorable to the suitable prosecution of work as specified in Section 8-1.05, "Temporary Suspension of Work."

14-7 PALEONTOLOGICAL RESOURCES

If paleontological resources are discovered at the job site, do not disturb the material and immediately:

1. Stop all work within a 60-foot radius of the discovery
2. Protect the area
3. Notify the Engineer

The Department investigates and modifies the dimensions of the protected area if necessary. Do not take paleontological resources from the job site. Do not resume work within the specified radius of the discovery until authorized.

14-8 NOISE AND VIBRATION

14-8.01 GENERAL

Reserved

14-8.02 NOISE CONTROL

Do not exceed 86 dBa at 50 feet from the job site activities from 9 p.m. to 6 a.m.

Equip an internal combustion engine with the manufacturer-recommended muffler. Do not operate an internal combustion engine on the job site without the appropriate muffler.

14-9 AIR QUALITY

14-9.01 AIR POLLUTION CONTROL

Comply with air pollution control rules, regulations, ordinances, and statutes that apply to work performed under the Contract, including air pollution control rules, regulations, ordinances, and statutes provided in Govt Code § 11017 (Pub Cont Code § 10231).

Do not burn material to be disposed of.

14-9.02 DUST CONTROL

Prevent and alleviate dust by applying water, dust palliative, or both under Section 14-9.01.

Apply water under Section 17, "Watering."

Apply dust palliative under Section 18, "Dust Palliative."

If ordered, apply water, dust palliative, or both to control dust caused by public traffic. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

14-10 SOLID WASTE DISPOSAL AND RECYCLING

14-10.01 SOLID WASTE DISPOSAL AND RECYCLING

Submit an annual Solid Waste Disposal and Recycling Report between January 1 and 15 for each year work is performed under the Contract at any time during the previous calendar year. Show the types and amounts of project-generated solid waste taken to or diverted from landfills or reused on the project from January 1 through December 31 of the previous calendar year.

Submit a final annual Solid Waste Disposal and Recycling Report within 5 business days after Contract acceptance. Show the types and amounts of project-generated solid waste taken to or diverted from landfills or reused on the project from January 1 to Contract acceptance.

For each failure to submit a completed form, the Department withholds \$10,000.

14-11 HAZARDOUS WASTE AND CONTAMINATION

14-11.01 GENERAL

Reserved

14-11.02 ASBESTOS AND HAZARDOUS SUBSTANCES

Upon discovery, immediately stop working in and notify the Engineer of areas where asbestos or a hazardous substance is present if the:

1. Contractor reasonably believes the substance is asbestos as defined in Labor Code § 6501.7 or a hazardous substance as defined in Health & Safety Code §§ 25316 and 25317
2. Presence is not described in the Contract
3. Substance has not been made harmless

14-12 OTHER INTERAGENCY RELATIONS

Reserved

14-13 PAYMENT

Payment for work specified in Section 14 is included in the payment for the bid items involved unless:

1. Bid item for the work is shown in the verified Bid Item List
2. Work is specified as paid for as extra work
ast 2,500 vibrations per minute and must be equipped with amplitude and frequency controls.
The roller's gross static weight must be at least 7.5 tons.

SECTION 15 EXISTING HIGHWAY FACILITIES

(Issued 05-01-09)

In Section 15-1.02 replace the 1st paragraph with:

Existing facilities which are to remain in place shall be protected in conformance with the provisions in Sections 5-1.18, "Property and Facility Preservation," and 7-1.12, "Indemnification and Insurance."

SECTION 19 EARTHWORK

(Issued 09-16-11)

Replace Section 19-1.02 with:

19-1.02 (BLANK)

Replace Section 19-1.03 with:

19-1.03 GRADE TOLERANCE

Immediately prior to placing subsequent layers of material thereon, the grading plane shall conform to one of the following:

- A. When hot mix asphalt is to be placed on the grading plane, the grading plane at any point shall not vary more than 0.05 foot above or below the grade established by the Engineer.
- B. When subbase or base material to be placed on the grading plane is to be paid for by the ton, the grading plane at any point shall not vary more than 0.10 foot above or below the grade established by the Engineer.

- C. When the material to be placed on the grading plane is to be paid for by the cubic yard, the grading plane at any point shall be not more than 0.05 foot above the grade established by the Engineer.

In Section 19-3.025C replace the 1st paragraph with:

Cementitious material used in soil cement bedding shall conform to the provisions in Section 90-2.01, "Cementitious Materials." Supplementary cementitious material will not be required.

In Section 19-3.025C replace the 4th paragraph with:

The aggregate, cementitious material, and water shall be proportioned either by weight or by volume. Soil cement bedding shall contain not less than 282 pounds of cementitious material per cubic yard. The water content shall be sufficient to produce a fluid, workable mix that will flow and can be pumped without segregation of the aggregate while being placed.

In Section 19-3.06 replace the 9th paragraph with:

Unless otherwise shown on the plans or specified in these specifications or the special provisions, material for structure backfill to be compacted to a relative compaction of not less than 90 percent, except material to be placed behind retaining walls, shall consist of material free of rocks, broken concrete, other solid material exceeding 3 inches in greatest dimension, or organic or other unsatisfactory material.

In Section 19-3.062 replace the 1st paragraph with:

Slurry cement backfill shall consist of a fluid, workable mixture of aggregate, cementitious material, and water.

In Section 19-3.062 replace the 5th paragraph with:

Cementitious material shall conform to the provisions in Section 90-2.01, "Cementitious Materials." Supplementary cementitious material will not be required.

In Section 19-3.062 replace the 8th paragraph with:

The aggregate, cementitious material, and water shall be proportioned either by weight or by volume. Slurry cement backfill shall contain not less than 188 pounds of cementitious material per cubic yard. The water content shall be sufficient to produce a fluid, workable mix that will flow and can be pumped without segregation of the aggregate while being placed.

SECTION 26 AGGREGATE BASES

(Issued 02-16-07)

In Section 26-1.02A replace the 1st paragraph with:

Aggregate must be clean and free from organic matter and other deleterious substances. Aggregate must consist of any combination of:

1. Broken stone
2. Crushed gravel
3. Natural rough surfaced gravel
4. Sand
5. Up to 100 percent of any combination of processed:
 - 5.1. Asphalt concrete
 - 5.2. Portland cement concrete
 - 5.3. Lean concrete base
 - 5.4. Cement treated base

In Section 26-1.02B replace the 1st paragraph with:

Aggregate must be clean and free from organic matter and other deleterious substances.
Aggregate must consist of any combination of:

1. Broken stone
2. Crushed gravel
3. Natural rough surfaced gravel
4. Sand
5. Up to 100 percent of any combination of processed:
 - 5.1. Asphalt concrete
 - 5.2. Portland cement concrete
 - 5.3. Lean concrete base
 - 5.4. Cement treated base

SECTION 39 ASPHALT CONCRETE
(Issued 10-19-12)

Replace Section 39 with:
SECTION 39 HOT MIX ASPHALT

39-1 GENERAL

39-1.01 DESCRIPTION

Section 39 includes specifications for producing and placing hot mix asphalt (HMA) by mixing aggregate and asphalt binder at a mixing plant and spreading and compacting the HMA mixture.

The special provisions specify one or more types of HMA, including:

1. Type A
2. Type B
3. Open graded friction course (OGFC). OGFC includes hot mix asphalt (open graded)[HMA-O], rubberized hot mix asphalt (open graded) [RHMA-O] and rubberized hot mix asphalt (open graded high binder) [RHMA-O-HB]

4. Rubberized hot mix asphalt (gap graded) [RHMA-G]

The special provisions specify the HMA construction process, including:

1. Standard
2. Method
3. Quality Control / Quality Assurance (QC / QA)

39-1.02 MATERIALS

39-1.02A Geosynthetic Pavement Interlayer

Geosynthetic pavement interlayer must comply with the specifications in Section 88-1.07, "Pavement Interlayer," for the type of interlayer shown on the plans.

39-1.02B Tack Coat

Tack coat must comply with the specifications for asphaltic emulsion in Section 94, "Asphaltic Emulsion," or asphalt binder in Section 92, "Asphalts." Choose the type and grade.

Notify the Engineer if you dilute asphaltic emulsion with water. The weight ratio of added water to asphaltic emulsion must not exceed 1 to 1.

Measure added water either by weight or volume in compliance with the specifications for weighing, measuring, and metering devices under Section 9-1.01, "Measurement of Quantities," or you may use water meters from water districts, cities, or counties. If you measure water by volume, apply a conversion factor to determine the correct weight.

With each dilution, submit in writing:

1. The weight ratio of water to bituminous material in the original asphaltic emulsion
2. The weight of asphaltic emulsion before diluting
3. The weight of added water
4. The final dilution weight ratio of water to asphaltic emulsion

39-1.02C Asphalt Binder

Asphalt binder in HMA must comply with Section 92, "Asphalts," or Section 39-1.02D, "Asphalt Rubber Binder." The special provisions specify the grade.

Asphalt binder for geosynthetic pavement interlayer must comply with Section 92, "Asphalts." Choose from Grades PG 64-10, PG 64-16, or PG 70-10.

39-1.02D Asphalt Rubber Binder

General

Use asphalt rubber binder in RHMA-G, RHMA-O, and RHMA-O-HB. Asphalt rubber binder must be a combination of:

1. Asphalt binder
2. Asphalt modifier
3. Crumb rubber modifier (CRM)

The combined asphalt binder and asphalt modifier must be 80.0 ± 2.0 percent by weight of the asphalt rubber binder.

Asphalt Modifier

Asphalt modifier must be a resinous, high flash point, and aromatic hydrocarbon, and comply with:

Asphalt Modifier for Asphalt Rubber Binder

Quality Characteristic	ASTM	Specification
Viscosity, m ² /s (x 10 ⁻⁶) at 100 °C	D 445	X ± 3 ^a
Flash Point, CL.O.C., °C	D 92	207 minimum
Molecular Analysis		
Asphaltenes, percent by mass	D 2007	0.1 maximum
Aromatics, percent by mass	D 2007	55 minimum

Note:

^a The symbol "X" is the proposed asphalt modifier viscosity. "X" must be between 19 and 36. A change in "X" requires a new asphalt rubber binder design.

Asphalt modifier must be from 2.0 percent to 6.0 percent by weight of the asphalt binder in the asphalt rubber binder.

Crumb Rubber Modifier

CRM consists of a ground or granulated combination of scrap tire CRM and high natural CRM. CRM must be 75.0 ± 2.0 percent scrap tire CRM and 25.0 ± 2.0 percent high natural CRM by total weight of CRM. Scrap tire CRM must be from any combination of automobile tires, truck tires, or tire buffings.

Sample and test scrap tire CRM and high natural CRM separately. CRM must comply with:

Crumb Rubber Modifier for Asphalt Rubber Binder

Quality Characteristic	Test Method	Specification
Scrap tire CRM gradation (% passing No. 8 sieve)	LP-10	100
High natural CRM gradation (% passing No. 10 sieve)	LP-10	100
Wire in CRM (% max.)	LP-10	0.01
Fabric in CRM (% max.)	LP-10	0.05
CRM particle length (inch max.) ^a	--	3/16
CRM specific gravity ^a	CT 208	1.1 – 1.2
Natural rubber content in high natural CRM (%) ^a	ASTM D 297	40.0 – 48.0

Note

:

^a Test at mix design and for Certificate of Compliance.

Only use CRM ground and granulated at ambient temperature. If steel and fiber are cryogenically separated, it must occur before grinding and granulating. Only use cryogenically produced CRM particles that can be ground or granulated and not pass through the grinder or granulator.

CRM must be dry, free-flowing particles that do not stick together. CRM must not cause foaming when combined with the asphalt binder and asphalt modifier. You may add calcium carbonate or talc up to 3 percent by weight of CRM.

Asphalt Rubber Binder Design and Profile

Submit in writing an asphalt rubber binder design and profile that complies with the asphalt rubber binder specifications. In the design, designate the asphalt, asphalt modifier, and CRM and their proportions. The profile is not a performance specification and only serves to indicate expected trends in asphalt rubber binder properties during binder production. The profile must include the same component sources for the asphalt rubber binder used.

Design the asphalt rubber binder from testing you perform for each quality characteristic and for the reaction temperatures expected during production. The 24-hour (1,440-minute) interaction period determines the design profile. At a minimum, mix asphalt rubber binder components, take samples, and perform and record the following tests:

Asphalt Rubber Binder Reaction Design Profile

Test	Minutes of Reaction ^a							Limits
	45	60	90	120	240	360	1440	
Cone penetration @ 77 °F, 0.10-mm (ASTM D 217)	X ^b				X		X	25 - 70
Resilience @ 77 °F, percent rebound (ASTM D 5329)	X				X		X	18 min.
Field softening point, °F (ASTM D 36)	X				X		X	125 - 165
Viscosity, centipoises (LP-11)	X	X	X	X	X	X	X	1,500 - 4,000

Notes:

^a Six hours (360 minutes) after CRM addition, reduce the oven temperature to 275 °F for a period of 16 hours. After the 16-hour (1320 minutes) cool-down after CRM addition, reheat the binder to the reaction temperature expected during production for sampling and testing at 24 hours (1440 minutes).

^b "X" denotes required testing

Asphalt Rubber Binder

After interacting for a minimum of 45 minutes, asphalt rubber binder must comply with:

Asphalt Rubber Binder

Quality Characteristic	Test for Quality Control or Acceptance	Test Method	Specification	
			Minimum	Maximum
Cone penetration @ 77 °F, 0.10-mm	Acceptance	ASTM D 217	25	70
Resilience @ 77 °F, percent rebound	Acceptance	ASTM D 5329	18	--
Field softening point, °F	Acceptance	ASTM D 36	125	165
Viscosity @ 375 °F, centipoises	Quality Control	LP-11	1,500	4,000

39-1.02E Aggregate

Aggregate must be clean and free from deleterious substances. Aggregate:

1. Retained on the No. 4 sieve is coarse
2. Passing the No. 4 sieve is fine
3. Added and passing the No. 30 sieve is supplemental fine, including:
 - 3.1. Hydrated lime
 - 3.2. Portland cement
 - 3.3. Fines from dust collectors

The special provisions specify the aggregate gradation for each HMA type.

The specified aggregate gradation is before the addition of asphalt binder and includes supplemental fines. The Engineer tests for aggregate grading under California Test 202, modified by California Test 105 if there is a difference in specific gravity of 0.2 or more between the coarse and fine parts of different aggregate blends.

Choose a sieve size target value (TV) within each target value limit presented in the aggregate gradation tables.

**Aggregate Gradation
(Percentage Passing)
HMA Types A and B**

3/4-inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
1"	100	—
3/4"	90 - 100	TV \pm 5
1/2"	70 - 90	TV \pm 6
No. 4	45 - 55	TV \pm 7
No. 8	32 - 40	TV \pm 5
No. 30	12 - 21	TV \pm 4
No. 200	2 - 7	TV \pm 2

1/2-inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	95 - 99	TV \pm 6
3/8"	75 - 95	TV \pm 6
No. 4	55 - 66	TV \pm 7
No. 8	38 - 49	TV \pm 5
No. 30	15 - 27	TV \pm 4
No. 200	2 - 8	TV \pm 2

3/8-inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
1/2"	100	—
3/8"	95 - 100	TV \pm 6
No. 4	58 - 72	TV \pm 7
No. 8	34 - 48	TV \pm 6
No. 30	18 - 32	TV \pm 5
No. 200	2 - 9	TV \pm 2

No. 4 HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/8"	100	—
No. 4	95 - 100	TV \pm 7
No. 8	72 - 77	TV \pm 7
No. 30	37 - 43	TV \pm 7
No. 200	2 - 12	TV \pm 4

Rubberized Hot Mix Asphalt - Gap Graded (RHMA-G)

3/4-inch RHMA-G

Sieve Sizes	Target Value Limits	Allowable Tolerance
1"	100	—
3/4"	95 - 100	TV ±5
1/2"	83 - 87	TV ±6
3/8"	65 - 70	TV ±6
No. 4	28 - 42	TV ±7
No. 8	14 - 22	TV ±5
No. 200	0 - 6	TV ±2

1/2-inch RHMA-G

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	90 - 100	TV ±6
3/8"	83 - 87	TV ±6
No. 4	28 - 42	TV ±7
No. 8	14 - 22	TV ±5
No. 200	0 - 6	TV ±2

Open Graded Friction Course (OGFC)

1-inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
1 1/2"	100	—
1"	99 - 100	TV ±5
3/4"	85 - 96	TV ±5
1/2"	55 - 71	TV ±6
No. 4	10 - 25	TV ±7
No. 8	6 - 16	TV ±5
No. 200	1 - 6	TV ±2

1/2-inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	95 - 100	TV ±6
3/8"	78 - 89	TV ±6
No. 4	28 - 37	TV ±7
No. 8	7 - 18	TV ±5
No. 30	0 - 10	TV ±4
No. 200	0 - 3	TV ±2

3/8-inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
1/2"	100	—
3/8"	90 - 100	TV ±6
No. 4	29 - 36	TV ±7
No. 8	7 - 18	TV ±6
No. 30	0 - 10	TV ±5
No. 200	0 - 3	TV ±2

Before the addition of asphalt binder and lime treatment, aggregate must comply with:

Aggregate Quality

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Percent of crushed particles Coarse aggregate (% min.)	CT 205				
One fractured face		90	25	--	90
Two fractured faces		75	--	90	75
Fine aggregate (% min.) (Passing No. 4 sieve and retained on No. 8 sieve.)	CT 205				
One fractured face		70	20	70	90
Los Angeles Rattler (% max.)	CT 211				
Loss at 100 Rev.		12	--	12	12
Loss at 500 Rev.		45	50	40	40
Sand equivalent (min.) ^a	CT 217	47	42	47	--
Fine aggregate angularity (% min.) ^b	CT 234	45	45	45	--
Flat and elongated particles (% max. by weight @ 5:1)	CT 235	10	10	10	10

Notes:

^a Reported value must be the average of 3 tests from a single sample.

^b The Engineer waives this specification if HMA contains 10 percent or less of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.

39-1.02F Reclaimed Asphalt Pavement

You may produce HMA using reclaimed asphalt pavement (RAP). HMA produced using RAP must comply with the specifications for HMA except aggregate quality specifications do not apply to RAP. You may substitute RAP aggregate for a part of the virgin aggregate in HMA in a quantity not exceeding 15.0 percent of the aggregate blend. Do not use RAP in OGFC and RHMA-G.

Assign the substitution rate of RAP aggregate for virgin aggregate with the job mix formula (JMF) submittal. The JMF must include the percent of RAP used. If you change your assigned RAP aggregate substitution rate by more than 5 percent (within the 15.0 percent limit), submit a new JMF.

Process RAP from asphalt concrete. You may process and stockpile RAP throughout the project's life. Prevent material contamination and segregation. Store RAP in stockpiles on smooth surfaces free of debris and organic material. Processed RAP stockpiles must consist only of homogeneous RAP.

39-1.03 HOT MIX ASPHALT MIX DESIGN REQUIREMENTS

39-1.03A General

A mix design consists of performing California Test 367 and laboratory procedures on combinations of aggregate gradations and asphalt binder contents to determine the optimum binder content (OBC) and HMA mixture qualities. If RAP is used, use Laboratory Procedure LP-9. The result of the mix design becomes the proposed JMF.

Use Form CEM-3512 to document aggregate quality and mix design data. Use Form CEM-3511 to present the JMF.

Laboratories testing aggregate qualities and preparing the mix design and JMF must be qualified under the Department's Independent Assurance Program. Take samples under California Test 125.

The Engineer reviews the aggregate qualities, mix design, and JMF and verifies and accepts the JMF.

You may change the JMF during production. Do not use the changed JMF until the Engineer accepts it. Except when adjusting the JMF in compliance with Section 39-1.03E, "Job Mix Formula Verification," perform a new mix design and submit in writing a new JMF submittal for changing any of the following:

1. Target asphalt binder percentage
2. Asphalt binder supplier
3. Asphalt rubber binder supplier
4. Component materials used in asphalt rubber binder or percentage of any component materials
5. Combined aggregate gradation
6. Aggregate sources
7. Substitution rate for RAP aggregate of more than 5 percent
8. Any material in the JMF

For OGFC, submit in writing a complete JMF submittal except asphalt binder content. The Engineer determines the asphalt binder content under California Test 368 within 20 days of your complete JMF submittal and provides you a Form CEM-3513.

39-1.03B Hot Mix Asphalt Mix Design

Perform a mix design that produces HMA in compliance with:

Hot Mix Asphalt Mix Design Requirements

Quality Characteristic	Test Method	HMA Type		
		A	B	RHMA-G
Air voids content (%)	CT 367 ^a	4.0	4.0	Special Provisions
Voids in mineral aggregate (% min.)	LP-2			
No. 4 grading		17.0	17.0	--
3/8" grading		15.0	15.0	--
1/2" grading		14.0	14.0	18.0 – 23.0 ^b
3/4" grading	13.0	13.0	18.0 – 23.0 ^b	
Voids filled with asphalt (%)	LP-3			
No. 4 grading		76.0 – 80.0	76.0 – 80.0	Note d
3/8" grading		73.0 – 76.0	73.0 – 76.0	
1/2" grading		65.0 – 75.0	65.0 – 75.0	
3/4" grading	65.0 – 75.0	65.0 – 75.0		
Dust proportion	LP-4			
No. 4 and 3/8" gradings		0.9 – 2.0	0.9 – 2.0	Note d
1/2" and 3/4" gradings		0.6 – 1.3	0.6 – 1.3	
Stabilometer value (min.) ^c	CT 366			
No. 4 and 3/8" gradings		30	30	--
1/2" and 3/4" gradings		37	35	23

Notes:

^a Calculate the air voids content of each specimen using California Test 309 and Lab Procedure LP-1. Modify California Test 367, Paragraph C5, to use the exact air voids content specified in the selection of OBC.

^b Voids in mineral aggregate for RHMA-G must be within this range.

^c Modify California Test 304, Part 2.B.2.c: "After compaction in the compactor, cool to 140 °± 5 °F by allowing the briquettes to cool at room temperature for 0.5-hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

^d Report this value in the JMF submittal.

For stability and air voids content, prepare 3 briquettes at the OBC and test for compliance. Report the average of 3 tests. Prepare new briquettes and test if the range of stability for the 3 briquettes is more than 8 points. The average air void content may vary from the specified air void content by ± 0.5 percent.

You may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If you use the same briquettes and tests using bulk specific gravity fail, you may prepare 3 new briquettes and determine a new bulk specific gravity.

39-1.03C Job Mix Formula Submittal

Each JMF submittal must consist of:

1. Proposed JMF on Form CEM-3511
2. Mix design documentation on Form CEM-3512 dated within 12 months of submittal
3. JMF verification on Form CEM-3513, if applicable
4. JMF renewal on Form CEM-3514, if applicable
5. Materials Safety Data Sheets (MSDS) for:
 - 5.1. Asphalt binder
 - 5.2. Base asphalt binder used in asphalt rubber binder
 - 5.3. CRM and asphalt modifier used in asphalt rubber binder
 - 5.4. Blended asphalt rubber binder mixture
 - 5.5. Supplemental fine aggregate except fines from dust collectors
 - 5.6. Antistrip additives

If the Engineer requests in writing, sample the following materials in the presence of the Engineer and place in labeled containers weighing no more than 50 pounds each:

1. Coarse, fine, and supplemental fine aggregate from stockpiles, cold feed belts, or hot bins. Samples must include at least 120 pounds for each coarse aggregate, 80 pounds for each fine aggregate, and 10 pounds for each type of supplemental fines. The Department combines these aggregate samples to comply with the JMF target values submitted on Form CEM-3511.
2. RAP from stockpiles or RAP system. Samples must be at least 60 pounds.
3. Asphalt binder from the binder supplier. Samples must be in two 1-quart cylindrical shaped cans with open top and friction lids.
4. Asphalt rubber binder with the components blended in the proportions to be used. Samples must be in four 1-quart cylindrical shaped cans with open top and friction lids.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate and RAP, split the samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

39-1.03D Job Mix Formula Review

The Engineer reviews each mix design and proposed JMF within 5 business days from the complete JMF submittal. The review consists of reviewing the mix design procedures and comparing the proposed JMF with the specifications.

The Engineer may verify aggregate qualities during this review period.

39-1.03E Job Mix Formula Verification

If you cannot submit a Department-verified JMF on Form CEM-3513 dated within 12 months before HMA production, the Engineer verifies the JMF.

Based on your testing and production experience, you may submit on Form CEM-3511 an adjusted JMF before the Engineer's verification testing. JMF adjustments may include a change in the:

1. Asphalt binder content target value up to ± 0.6 percent from the optimum binder content value submitted on Form CEM-3512 except do not adjust the target value for asphalt rubber binder for RHMA-G below 7.0 percent
2. Aggregate gradation target values within the target value limits specified in the aggregate gradation tables

For HMA Type A, Type B, and RHMA-G, the Engineer verifies the JMF from samples taken from HMA produced by the plant to be used. Notify the Engineer in writing at least 2 business days before sampling materials.

In the Engineer's presence and from the same production run, take samples of:

1. Aggregate
2. Asphalt binder
3. RAP
4. HMA

Sample aggregate from cold feed belts or hot bins. Sample RAP from the RAP system. Sample HMA under California Test 125 except if you request in writing and the Engineer approves, you may sample from any of the following locations:

1. The plant
2. A truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

You may sample from a different project including a non-Department project if you make arrangements for the Engineer to be present during sampling.

For aggregate, RAP, and HMA, split the samples into at least 4 parts and label their containers. Submit 3 split parts to the Engineer and use 1 part for your testing.

The Engineer verifies each proposed JMF within 20 days of receiving all verification samples and the JMF submittal has been accepted. If you request in writing, the Engineer verifies RHMA-G quality requirements within 3 business days of sampling. Verification is testing for compliance with the specifications for:

1. Aggregate quality
2. Aggregate gradation (JMF TV \pm tolerance)
3. Asphalt binder content (JMF TV \pm tolerance)
4. HMA quality specified in the table Hot Mix Asphalt Mix Design Requirements except:
 - 4.1. Air voids content (design value ± 2.0 percent)

- 4.2. Voids filled with asphalt (report only if an adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC)
- 4.3. Dust proportion (report only if an adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC)

The Engineer prepares 3 briquettes from a single split sample. To verify the JMF for stability and air voids content, the Engineer tests the 3 briquettes and reports the average of 3 tests. The Engineer prepares new briquettes if the range of stability for the 3 briquettes is more than 8 points.

The Engineer may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If the Engineer uses the same briquettes and the tests using bulk specific gravity fail, the Engineer prepares 3 new briquettes and determines a new bulk specific gravity.

If the Engineer verifies the JMF, the Engineer provides you a Form CEM-3513.

If the Engineer's tests on plant-produced samples do not verify the JMF, the Engineer notifies you in writing and you must submit a new JMF submittal or submit an adjusted JMF based on your testing. JMF adjustments may include a change in the:

1. Asphalt binder content target value up to ± 0.6 percent from the optimum binder content value submitted on Form CEM-3512 except do not adjust the target value for asphalt rubber binder for RHMA-G below 7.0 percent
2. Aggregate gradation target values within the target value limits specified in the aggregate gradation tables

You may adjust the JMF only once due to a failed verification test. An adjusted JMF requires a new Form CEM-3511 and verification of a plant-produced sample.

A verified JMF is valid for 12 months.

For each HMA type and aggregate size specified, the Engineer verifies at the State's expense up to 2 proposed JMF including a JMF adjusted after verification failure. The Engineer deducts \$3,000 from payments for each verification exceeding this limit. This deduction does not apply to verifications initiated by the Engineer or JMF renewal.

39-1.03F Job Mix Formula Renewal

You may request a JMF renewal by submitting the following:

1. Proposed JMF on Form CEM-3511
2. A previously verified JMF documented on Form CEM-3513 dated within 12 months
3. Mix design documentation on Form CEM-3512 used for the previously verified JMF

If the Engineer requests in writing, sample the following materials in the presence of the Engineer and place in labeled containers weighing no more than 50 pounds each:

1. Coarse, fine, and supplemental fine aggregate from stockpiles, cold feed belts, or hot bins. Samples must include at least 120 pounds for each coarse aggregate, 80 pounds for each fine aggregate, and 10 pounds for each type of supplemental fines. The Department combines these aggregate samples to comply with the JMF target values submitted on Form CEM-3511.
2. RAP from stockpiles or RAP system. Samples must be at least 60 pounds.
3. Asphalt binder from the binder supplier. Samples must be in two 1-quart cylindrical shaped cans with open top and friction lids.

4. Asphalt rubber binder with the components blended in the proportions to be used. Samples must be in four 1-quart cylindrical shaped cans with open top and friction lids.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate and RAP, split samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

The Engineer may verify aggregate qualities during this review period.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate, RAP, and HMA, split the samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

The Engineer verifies the JMF renewal submittal under Section 39-1.03E, "Job Mix Formula Verification," except:

1. The Engineer retains samples until you provide test results for your part on Form CEM-3514.
2. The Engineer tests samples of materials obtained from the HMA production unit after you submit test results that comply with the specifications for the quality characteristics under Section 39-1.03E, "Job Mix Formula Verification."
3. The Engineer verifies each proposed JMF renewal within 20 days of receiving verification samples.
4. You may not adjust the JMF due to a failed verification.
5. For each HMA type and aggregate gradation specified, the Engineer verifies at the State's expense 1 proposed JMF renewal within a 12-month period.

The most recent aggregate quality test results within the past 12 months may be used for verification of JMF renewal or the Engineer may perform aggregate quality tests for verification of JMF renewal.

If the Engineer verifies the JMF renewal, the Engineer provides you a Form CEM-3513.

39-1.03G Job Mix Formula Modification

For an accepted JMF, you may change binder source one time during production.

Submit your modified JMF request a minimum of 3 business days before production. Each modified JMF submittal must consist of:

1. Proposed modified JMF on Form CEM-3511.
2. Mix design records on Form CEM-3512 for the accepted JMF to be modified.
3. JMF verification on Form CEM-3513 for the accepted JMF to be modified.
4. Quality characteristics test results for the modified JMF as specified in section 39-1.03B. Perform tests at the mix design OBC as shown on Form CEM-3512.
5. If required, California Test 371 test results for the modified JMF.

With an accepted modified JMF submittal, the Engineer verifies each modified JMF within 5 business days of receiving all verification samples. If California Test 371 is required, the Engineer tests for California Test 371 within 10 days of receiving verification samples.

The Engineer verifies the modified JMF after the modified JMF HMA is placed on the project and verification samples are taken within the first 750 tons following sampling requirements in Section 39-1.03E, "Job Mix Formula Verification." The Engineer tests verification samples for compliance with:

1. Stability as shown in the table titled "Hot Mix Asphalt Mix Design Requirements"
2. Air void content at design value ± 2.0 percent
3. Voids in mineral aggregate as shown in the table titled "Hot Mix Asphalt Mix Design Requirements"
4. Voids filled with asphalt if an adjustment for asphalt binder content TV is more than ± 0.3 percent from the original OBC shown on Form CEM-3512.
5. Dust proportion if an adjustment for asphalt binder content TV is more than ± 0.3 percent from OBC shown on Form CEM-3512.

If the modified JMF is verified, the Engineer revises your Form CEM-3513 to include the new binder source. Your revised Form CEM-3513 will have the same expiration date as the original Form CEM-3513 for the accepted JMF that is modified.

If a modified JMF is not verified, stop production and any HMA placed using the modified JMF is rejected.

The Engineer deducts \$2,000 from payments for each modified JMF verification. The Engineer deducts an additional \$2,000 from payments for each modified JMF verification that requires California Test 371.

39-1.03H Job Mix Formula Acceptance

You may start HMA production if:

1. The Engineer's review of the JMF shows compliance with the specifications.
2. The Department has verified the JMF within 12 months before HMA production.
3. The Engineer accepts the verified JMF.

39-1.04 CONTRACTOR QUALITY CONTROL

39-1.04A General

Establish, maintain, and change a quality control system to ensure materials and work comply with the specifications. Submit quality control test results to the Engineer within 3 business days of a request except when QC / QA is specified.

You must identify the HMA sampling location in your Quality Control Plan. During production, take samples under California Test 125. You may sample HMA from:

1. The plant
2. The truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

39-1.04B Prepaving Conference

Meet with the Engineer at a prepaving conference at a mutually agreed time and place. Discuss methods of performing the production and paving work.

39-1.04C Asphalt Rubber Binder

Take asphalt rubber binder samples from the feed line connecting the asphalt rubber binder tank to the HMA plant. Sample and test asphalt rubber binder under Laboratory Procedure LP-11.

Test asphalt rubber binder for compliance with the viscosity specifications in Section 39-1.02, "Materials." During asphalt rubber binder production and HMA production using asphalt rubber binder, measure viscosity every hour with not less than 1 reading for each asphalt rubber binder batch. Log measurements with corresponding time and asphalt rubber binder temperature. Submit the log daily in writing.

Submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance." With the Certificate of Compliance, submit test results in writing for CRM and asphalt modifier with each truckload delivered to the HMA plant. A Certificate of Compliance for asphalt modifier must not represent more than 5,000 pounds. Use an AASHTO-certified laboratory for testing.

Sample and test gradation and wire and fabric content of CRM once per 10,000 pounds of scrap tire CRM and once per 3,400 pounds of high natural CRM. Sample and test scrap tire CRM and high natural CRM separately.

Submit certified weight slips in writing for the CRM and asphalt modifier furnished.

39-1.04D Aggregate

Determine the aggregate moisture content and RAP moisture content in continuous mixing plants at least twice a day during production and adjust the plant controller. Determine the RAP moisture content in batch mixing plants at least twice a day during production and adjust the plant controller.

39-1.04E Reclaimed Asphalt Pavement

Perform RAP quality control testing each day.

Sample RAP once daily and determine the RAP aggregate gradation under Laboratory Procedure LP-9 and submit the results to the Engineer in writing with the combined aggregate gradation.

39-1.04F Density Cores

To determine density for Standard and QC / QA projects, take 4-inch or 6-inch diameter density cores at least once every 5 business days. Take 1 density core for every 250 tons of HMA from random locations the Engineer designates. Take density cores in the Engineer's presence and backfill and compact holes with material authorized by the Engineer. Before submitting a density core to the Engineer, mark it with the density core's location and place it in a protective container.

If a density core is damaged, replace it with a density core taken within 1 foot longitudinally from the original density core. Relocate any density core located within 1 foot of a rumble strip to 1 foot transversely away from the rumble strip.

39-1.04G Briquettes

Prepare 3 briquettes for each stability and air voids content determination. Report the average of 3 tests. Prepare new briquettes and test if the range of stability for the 3 briquettes is more than 12 points.

You may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If you use these briquettes and tests using bulk specific gravity fail, you may prepare 3 new briquettes and determine a new bulk specific gravity.

39-1.05 ENGINEER'S ACCEPTANCE

The Engineer's acceptance of HMA is specified in the sections for each HMA construction process.

The Engineer samples materials for testing under California Test 125 and the applicable test method except samples may be taken from:

1. The plant from:
 - 1.1. A truck
 - 1.2. An automatic sampling device
2. The mat behind the paver

Sampling must be independent of Contractor quality control, statistically-based, and random. If you request, the Engineer splits samples and provides you with a part.

The Engineer accepts HMA based on:

1. Accepted JMF
2. Accepted QCP for Standard and QC / QA
3. Compliance with the HMA Acceptance tables
4. Acceptance of a lot for QC / QA
5. Visual inspection

The Engineer prepares 3 briquettes for each stability and air voids content determination. The Engineer reports the average of 3 tests. The Engineer prepares new briquettes and test if the range of stability for the 3 briquettes is more than 8 points.

The Engineer may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If the Engineer uses the same briquettes and the tests using bulk specific gravity fail, the Engineer prepares 3 new briquettes and determines a new bulk specific gravity.

39-1.06 DISPUTE RESOLUTION

You and the Engineer must work together to avoid potential conflicts and to resolve disputes regarding test result discrepancies. Notify the Engineer in writing within 5 business days of receiving a test result if you dispute the test result.

If you or the Engineer dispute each other's test results, submit written quality control test results and copies of paperwork including worksheets used to determine the disputed test results to the Engineer. An Independent Third Party (ITP) performs referee testing. Before the ITP participates in a dispute resolution, the ITP must be accredited under the Department's Independent Assurance Program. The ITP must be independent of the project. By mutual agreement, the ITP is chosen from:

1. A Department laboratory
2. A Department laboratory in a district or region not in the district or region the project is located
3. The Transportation Laboratory
4. A laboratory not currently employed by you or your HMA producer

If split quality control or acceptance samples are not available, the ITP uses any available material representing the disputed HMA for evaluation.

39-1.07 PRODUCTION START-UP EVALUATION

The Engineer evaluates HMA production and placement at production start-up.

Within the first 750 tons produced on the first day of HMA production, in the Engineer's presence and from the same production run, take samples of:

1. Aggregate
2. Asphalt binder
3. RAP
4. HMA

Sample aggregate from cold feed belts or hot bins. Take RAP samples from the RAP system. Sample HMA under California Test 125 except if you request in writing and the Engineer approves, you may sample HMA from:

1. The plant
2. The truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

For aggregate, RAP, and HMA, split the samples into at least 4 parts and label their containers. Submit 3 split parts to the Engineer and keep 1 part.

For Standard and QC / QA projects, you and the Engineer must test the split samples and report test results in writing within 3 business days of sampling. If you proceed before receipt of the test results, the Engineer may consider the HMA placed to be represented by these test results.

For Standard and QC / QA projects, take 4-inch or 6-inch diameter density cores within the first 750 tons on the first day of HMA production. For each density core, the Engineer reports the bulk specific gravity determined under California Test 308, Method A in addition to the percent of maximum theoretical density. You may test for in-place density at the density core locations and include them in your production tests for percent of maximum theoretical density.

39-1.08 PRODUCTION

39-1.08A General

Produce HMA in a batch mixing plant or a continuous mixing plant. Proportion aggregate by hot or cold feed control.

HMA plants must be Department-qualified. Before production, the HMA plant must have a current qualification under the Department's Materials Plant Quality Program.

During production, you may adjust:

1. Hot or cold feed proportion controls for virgin aggregate and RAP
2. The set point for asphalt binder content

39-1.08B Mixing

Mix HMA ingredients into a homogeneous mixture of coated aggregates.

Asphalt binder must be between 275 °F and 375 °F when mixed with aggregate.

Asphalt rubber binder must be between 375 °F and 425 °F when mixed with aggregate.

When mixed with asphalt binder, aggregate must not be more than 325 °F except aggregate for OGFC with unmodified asphalt binder must be not more than 275 °F. Aggregate temperature specifications do not apply when you use RAP.

HMA with or without RAP must not be more than 325 °F.

39-1.08C Asphalt Rubber Binder

Deliver scrap tire CRM and high natural CRM in separate bags.

Either proportion and mix asphalt binder, asphalt modifier, and CRM simultaneously or premix the asphalt binder and asphalt modifier before adding CRM. If you premix asphalt binder and asphalt modifier, asphalt binder must be from 375 to 425 degrees F when you add the asphalt modifier. Mix them for at least 20 minutes. When you add CRM, the asphalt binder and asphalt modifier must be between 375 °F and 425 °F.

Do not use asphalt rubber binder during the first 45 minutes of the reaction period. During this period, the asphalt rubber binder mixture must be between 375 °F and the lower of 425 °F or 25 °F below the asphalt binder's flash point indicated in the MSDS.

If any asphalt rubber binder is not used within 4 hours after the reaction period, discontinue heating. If the asphalt rubber binder drops below 375 °F, reheat before use. If you add more scrap tire CRM to the reheated asphalt rubber binder, the binder must undergo a 45-minute reaction period. The added scrap tire CRM must not exceed 10 percent of the total asphalt rubber binder weight. Reheated and reacted asphalt rubber binder must comply with the viscosity specifications for asphalt rubber binder in Section 39-1.02, "Materials." Do not reheat asphalt rubber binder more than twice.

39-1.09 SUBGRADE, TACK COAT, AND GEOSYNTHETIC PAVEMENT INTERLAYER

39-1.09A General

Prepare subgrade or apply tack coat to surfaces receiving HMA. If specified, place geosynthetic pavement interlayer over a coat of asphalt binder.

39-1.09B Subgrade

Subgrade to receive HMA must comply with the compaction and elevation tolerance specifications in the sections for the material involved. Subgrade must be free of loose and extraneous material. If HMA is paved on existing base or pavement, remove loose paving particles, dirt, and other extraneous material by any means including flushing and sweeping.

39-1.09C Tack Coat

Apply tack coat:

1. To existing pavement including planed surfaces
2. Between HMA layers
3. To vertical surfaces of:
 - 3.1. Curbs
 - 3.2. Gutters
 - 3.3. Construction joints

Before placing HMA, apply tack coat in 1 application at the minimum residual rate specified for the condition of the underlying surface:

Tack Coat Application Rates for HMA Type A, Type B, and RHMA-G

HMA over:	Minimum Residual Rates (gallons per square yard)		
	CSS1/CSS1h, SS1/SS1h and QS1h/CQS1h Asphaltic Emulsion	CRS1/CRS2, RS1/RS2 and QS1/CQS1 Asphaltic Emulsion	Asphalt Binder and PMRS2/PMCRS2 and PMRS2h/PMCRS2h Asphaltic Emulsion
New HMA (between layers)	0.02	0.03	0.02
PCC and existing HMA (AC) surfaces	0.03	0.04	0.03
Planed PCC and HMA (AC) surfaces	0.05	0.06	0.04

Tack Coat Application Rates for OGFC

OGFC over:	Minimum Residual Rates (gallons per square yard)		
	CSS1/CSS1h, SS1/SS1h and QS1h/CQS1h Asphaltic Emulsion	CRS1/CRS2, RS1/RS2 and QS1/CQS1 Asphaltic Emulsion	Asphalt Binder and PMRS2/PMCRS2 and PMRS2h/PMCRS2h Asphaltic Emulsion
New HMA	0.03	0.04	0.03
PCC and existing HMA (AC) surfaces	0.05	0.06	0.04
Planed PCC and HMA (AC) surfaces	0.06	0.07	0.05

If you dilute asphaltic emulsion, mix until homogeneous before application.

Apply to vertical surfaces with a residual tack coat rate that will thoroughly coat the vertical face without running off.

If you request in writing and the Engineer authorizes, you may:

1. Change tack coat rates
2. Omit tack coat between layers of new HMA during the same work shift if:
 - 2.1. No dust, dirt, or extraneous material is present
 - 2.2. The surface is at least 140 °F

Immediately in advance of placing HMA, apply additional tack coat to damaged areas or where loose or extraneous material is removed.

Close areas receiving tack coat to traffic. Do not track tack coat onto pavement surfaces beyond the job site.

Asphalt binder tack coat must be between 285 °F and 350 °F when applied.

39-1.09D Geosynthetic Pavement Interlayer

Place geosynthetic pavement interlayer in compliance with the manufacturer's recommendations.

Before placing the geosynthetic pavement interlayer and asphalt binder:

1. Repair cracks 1/4 inch and wider, spalls, and holes in the pavement. The State pays for this repair work under Section 4-1.03D, "Extra Work."
2. Clean the pavement of loose and extraneous material.

Immediately before placing the interlayer, apply 0.25 gallon \pm 0.03 gallon of asphalt binder per square yard of interlayer or until the fabric is saturated. Apply asphalt binder the width of the geosynthetic pavement interlayer plus 3 inches on each side. At interlayer overlaps, apply asphalt binder on the lower interlayer the same overlap distance as the upper interlayer.

Asphalt binder must be from 285 °F to 350 °F and below the minimum melting point of the geosynthetic pavement interlayer when applied.

Align and place the interlayer with no overlapping wrinkles, except a wrinkle that overlaps may remain if it is less than 1/2 inch thick. If the overlapping wrinkle is more than 1/2 inch thick, cut the wrinkle out and overlap the interlayer no more than 2 inches.

The minimum HMA thickness over the interlayer must be 0.12 foot thick including conform tapers. Do not place the interlayer on a wet or frozen surface.

Overlap the interlayer borders between 2 inches and 4 inches. In the direction of paving, overlap the following roll with the preceding roll at any break.

You may use rolling equipment to correct distortions or wrinkles in the interlayer.

If asphalt binder tracked onto the interlayer or brought to the surface by construction equipment causes interlayer displacement, cover it with a small quantity of HMA.

Before placing HMA on the interlayer, do not expose the interlayer to:

1. Traffic except for crossings under traffic control and only after you place a small HMA quantity
2. Sharp turns from construction equipment
3. Damaging elements

Pave HMA on the interlayer during the same work shift.

39-1.10 SPREADING AND COMPACTING EQUIPMENT

Paving equipment for spreading must be:

1. Self-propelled
2. Mechanical
3. Equipped with a screed or strike-off assembly that can distribute HMA the full width of a traffic lane
4. Equipped with a full-width compacting device
5. Equipped with automatic screed controls and sensing devices that control the thickness, longitudinal grade, and transverse screed slope

Install and maintain grade and slope references.

The screed must produce a uniform HMA surface texture without tearing, shoving, or gouging.

The paver must not leave marks such as ridges and indentations unless you can eliminate them by rolling.

Rollers must be equipped with a system that prevents HMA from sticking to the wheels. You may use a parting agent that does not damage the HMA or impede the bonding of layers.

In areas inaccessible to spreading and compacting equipment:

1. Spread the HMA by any means to obtain the specified lines, grades and cross sections.
2. Use a pneumatic tamper, plate compactor, or equivalent to achieve thorough compaction.

39-1.11 TRANSPORTING, SPREADING, AND COMPACTING

Do not pave HMA on a wet pavement or frozen surface.

You may deposit HMA in a windrow and load it in the paver if:

1. Paver is equipped with a hopper that automatically feeds the screed
2. Loading equipment can pick up the windrowed material and deposit it in the paver hopper without damaging base material
3. Activities for deposit, pick-up, loading, and paving are continuous
4. HMA temperature in the windrow does not fall below 260 °F

You may pave HMA in 1 or more layers on areas less than 5 feet wide and outside the traveled way including shoulders. You may use mechanical equipment other than a paver for these areas. The equipment must produce a uniform smoothness and texture.

HMA handled, spread, or windrowed must not stain the finished surface of any improvement including pavement.

Do not use petroleum products such as kerosene or diesel fuel to release HMA from trucks, spreaders, or compactors.

HMA must be free of:

1. Segregation
2. Coarse or fine aggregate pockets
3. Hardened lumps

Longitudinal joints in the top layer must match specified lane edges. Alternate longitudinal joint offsets in lower layers at least 0.5 foot from each side of the specified lane edges. You may request in writing other longitudinal joint placement patterns.

Until the adjoining through lane's top layer has been paved, do not pave the top layer of:

1. Shoulders
2. Tapers
3. Transitions
4. Road connections
5. Driveways
6. Curve widenings
7. Chain control lanes
8. Turnouts
9. Turn pockets

If the number of lanes change, pave each through lane's top layer before paving a tapering lane's top layer. Simultaneous to paving a through lane's top layer, you may pave an adjoining area's top layer including shoulders. Do not operate spreading equipment on any area's top layer until completing final compaction.

If HMA (leveling) is specified, fill and level irregularities and ruts with HMA before spreading HMA over base, existing surfaces, or bridge decks. You may use mechanical equipment other than a paver for these areas. The equipment must produce a uniform smoothness

and texture. HMA used to change an existing surface's cross slope or profile is not HMA (leveling).

If placing HMA against the edge of existing pavement, sawcut or grind the pavement straight and vertical along the joint and remove extraneous material without damaging the surface remaining in place. If placing HMA against the edge of a longitudinal or transverse construction joint and the joint is damaged or not placed to a neat line, sawcut or grind the pavement straight and vertical along the joint and remove extraneous material without damaging the surface remaining in place. Repair or remove and replace damaged pavement at your expense.

Rolling must leave the completed surface compacted and smooth without tearing, cracking, or shoving. Complete finish rolling activities before the pavement surface temperature is:

1. Below 150 °F for HMA with unmodified binder
2. Below 140 °F for HMA with modified binder
3. Below 200 °F for RHMA-G

If a vibratory roller is used as a finish roller, turn the vibrator off.

Do not use a pneumatic tired roller to compact RHMA-G.

For Standard and QC/QA, if a 3/4-inch aggregate grading is specified, you may use a 1/2-inch aggregate grading if the specified total paved thickness is at least 0.15 foot and less than 0.20 foot thick.

Spread and compact HMA under Section 39-3.03, "Spreading and Compacting Equipment," and Section 39-3.04, "Transporting, Spreading, and Compacting," for any of the following:

1. Specified paved thickness is less than 0.15 foot.
2. Specified paved thickness is less than 0.20 foot and a 3/4-inch aggregate grading is specified and used.
3. You spread and compact at:
 - 3.1. Asphalt concrete surfacing replacement areas
 - 3.2. Leveling courses
 - 3.3. Areas the Engineer determines conventional compaction and compaction measurement methods are impeded

Do not open new HMA pavement to public traffic until its mid-depth temperature is below 160 °F.

If you request in writing and the Engineer authorizes, you may cool HMA Type A and Type B with water when rolling activities are complete. Apply water under Section 17, "Watering."

Spread sand at a rate between 1 pound and 2 pounds per square yard on new RHMA-G, RHMA-O, and RHMA-O-HB pavement when finish rolling is complete. Sand must be free of clay or organic matter. Sand must comply with Section 90-3.03, "Fine Aggregate Grading." Keep traffic off the pavement until spreading sand is complete.

39-1.12 SMOOTHNESS

39-1.12A General

Determine HMA smoothness with a profilograph and a straightedge.

Smoothness specifications do not apply to OGFC placed on existing pavement not constructed under the same project.

If portland cement concrete is placed on HMA:

1. Cold plane the HMA finished surface to within specified tolerances if it is higher than the grade specified by the Engineer.
2. Remove and replace HMA if the finished surface is lower than 0.05 foot below the grade specified by the Engineer.

39-1.12B Straightedge

The HMA pavement top layer must not vary from the lower edge of a 12-foot long straightedge:

1. More than 0.01 foot when the straight edge is laid parallel with the centerline
2. More than 0.02 foot when the straightedge is laid perpendicular to the centerline and extends from edge to edge of a traffic lane
3. More than 0.02 foot when the straightedge is laid within 24 feet of a pavement conform

39-1.12C Profilograph

Under California Test 526, determine the zero (null) blanking band Profile Index (PI_0) and must-grinds on the top layer of HMA Type A, Type B, and RHMA-G pavement. Take 2 profiles within each traffic lane, 3 feet from and parallel with the edge of each lane.

A must-grind is a deviation of 0.3 inch or more in a length of 25 feet. You must correct must-grinds.

For OGFC, only determine must-grinds when placed over HMA constructed under the same project. The top layer of the underlying HMA must comply with the smoothness specifications before placing OGFC.

Profile pavement in the Engineer's presence. Choose the time of profiling.

On tangents and horizontal curves with a centerline radius of curvature 2,000 feet or more, the PI_0 must be at most 2.5 inches per 0.1-mile section.

On horizontal curves with a centerline radius of curvature between 1,000 feet and 2,000 feet including pavement within the superelevation transitions, the PI_0 must be at most 5 inches per 0.1-mile section.

Before the Engineer accepts HMA pavement for smoothness, submit written final profilograms.

Submit 1 electronic copy of profile information in Microsoft Excel and 1 electronic copy of longitudinal pavement profiles in ".erd" format or other ProVAL compatible format to the Engineer and to:

Smoothness@dot.ca.gov

The following HMA pavement areas do not require a PI_0 . You must measure these areas with a 12-foot straightedge and determine must-grinds with a profilograph:

1. New HMA with a total thickness less than 0.25 foot
2. HMA sections of city or county streets and roads, turn lanes and collector lanes that are less than 1,500 feet in length

The following HMA pavement areas do not require a PI_0 . You must measure these areas with a 12-foot straightedge:

1. Horizontal curves with a centerline radius of curvature less than 1,000 feet including pavement within the superelevation transitions of those curves

2. Within 12 feet of a transverse joint separating the pavement from:
 - 2.1. Existing pavement not constructed under the same project
 - 2.2. A bridge deck or approach slab
3. Exit ramp termini, truck weigh stations, and weigh-in-motion areas
4. If steep grades and superelevation rates greater than 6 percent are present on:
 - 4.1. Ramps
 - 4.2. Connectors
5. Turn lanes
6. Areas within 15 feet of manholes or drainage transitions
7. Acceleration and deceleration lanes for at-grade intersections
8. Shoulders and miscellaneous areas
9. HMA pavement within 3 feet from and parallel to the construction joints formed between curbs, gutters, or existing pavement

39-1.12D Smoothness Correction

If the top layer of HMA Type A, Type B, or RHMA-G pavement does not comply with the smoothness specifications, grind the pavement to within tolerances, remove and replace it, or place a layer of HMA. The Engineer must authorize your choice of correction before the work begins.

Remove and replace the areas of OGFC not in compliance with the must-grind and straightedge specifications, except you may grind OGFC for correcting smoothness:

1. At a transverse joint separating the pavement from pavement not constructed under the same project
2. Within 12 feet of a transverse joint separating the pavement from a bridge deck or approach slab

Corrected HMA pavement areas must be uniform rectangles with edges:

1. Parallel to the nearest HMA pavement edge or lane line
2. Perpendicular to the pavement centerline

Measure the corrected HMA pavement surface with a profilograph and a 12-foot straightedge and correct the pavement to within specified tolerances. If a must-grind area or straightedged pavement cannot be corrected to within specified tolerances, remove and replace the pavement.

On ground areas not overlaid with OGFC, apply fog seal coat under Section 37-1, "Seal Coats."

39-1.13 MISCELLANEOUS AREAS AND DIKES

Miscellaneous areas are outside the traveled way and include:

1. Median areas not including inside shoulders
2. Island areas
3. Sidewalks
4. Gutters

5. Gutter flares
6. Ditches
7. Overside drains
8. Aprons at the ends of drainage structures

Spread miscellaneous areas in 1 layer and compact to the specified lines and grades.
For miscellaneous areas and dikes:

1. Do not submit a JMF.
2. Choose the 3/8-inch or 1/2-inch HMA Type A and Type B aggregate gradations.
3. Minimum asphalt binder content must be 6.8 percent for 3/8-inch aggregate and 6.0 percent for 1/2-inch aggregate. If you request in writing and the Engineer authorizes, you may reduce the minimum asphalt binder content.
4. Choose asphalt binder Grade PG 70-10 or the same grade specified for HMA.

39-2 STANDARD

39-2.01 DESCRIPTION

If HMA is specified as Standard, construct it under Section 39-1, "General," this Section 39-2, "Standard," and Section 39-5, "Measurement and Payment."

39-2.02 CONTRACTOR QUALITY CONTROL

39-2.02A Quality Control Plan

Establish, implement, and maintain a Quality Control Plan (QCP) for HMA. The QCP must describe the organization and procedures you will use to:

1. Control the quality characteristics
2. Determine when corrective actions are needed (action limits)
3. Implement corrective actions

When you submit the proposed JMF, submit the written QCP. You and the Engineer must discuss the QCP during the prepaving conference.

The QCP must address the elements affecting HMA quality including:

1. Aggregate
2. Asphalt binder
3. Additives
4. Production
5. Paving

The Engineer reviews each QCP within 5 business days from the submittal. Hold HMA production until the Engineer accepts the QCP in writing. The Engineer's QCP acceptance does not mean your compliance with the QCP will result in acceptable HMA. Section 39-1.05, "Engineer's Acceptance," specifies HMA acceptance.

39-2.02B Quality Control Testing

Perform sampling and testing at the specified frequency for the following quality characteristics:

Minimum Quality Control – Standard

Quality Characteristic	Test Method	Minimum Sampling and Testing Frequency	HMA Type			
			A	B	RHMA-G	OGFC
Aggregate gradation ^a	CT 202	1 per 750 tons and any remaining part at the end of the project	JMF ± Tolerance ^b			
Sand equivalent (min.) ^c	CT 217		47	42	47	--
Asphalt binder content (%)	CT 379 or 382		JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (% , max.)	CT 226 or CT 370	1 per 2,500 tons but not less than 1 per paving day	1.0	1.0	1.0	1.0
Field compaction, (% , max. theoretical density) ^{d,e}	Quality control plan	2 per business day (min.)	91 - 97	91 - 97	91 - 97	--
Stabilometer value (min.) ^{c,f} No. 4 and 3/8" gradings 1/2" and 3/4" gradings	CT 366	One per 4,000 tons or 2 per 5 business days, whichever is more	30	30	--	--
			37	35	23	--
Air voids content (%) ^{c,g}	CT 367		4 ± 2	4 ± 2	Specification ± 2	--
Aggregate moisture content at continuous mixing plants and RAP moisture content at continuous mixing plants and batch mixing plants ^h	CT 226 or CT 370	2 per day during production	--	--	--	--
Percent of crushed particles coarse aggregate (% , min.) One fractured face Two fractured faces Fine aggregate (% , min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face	CT 205	As necessary and designated in the QCP. At least once per project	90	25	--	90
			75	--	90	75
			70	20	70	90
Los Angeles Rattler (% , max.) Loss at 100 rev. Loss at 500 rev.	CT 211		12 45	-- 50	12 40	12 40

Flat and elongated particles (% max. by weight @ 5:1)	CT 235		Report only	Report only	Report only	Report only
Fine aggregate angularity (% min.) ⁱ	CT 234		45	45	45	--
Voids filled with asphalt (%) ^j No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-3		76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	Report only	--
Voids in mineral aggregate (% min.) ^j No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-2		17.0 15.0 14.0 13.0	17.0 15.0 14.0 13.0	-- -- 18.0 – 23.0 ^k 18.0 – 23.0 ^k	--
Dust proportion ^j No. 4 and 3/8" gradings 1/2" and 3/4" gradings	LP-4		0.9 – 2.0 0.6 – 1.3	0.9 – 2.0 0.6 – 1.3	Report only	--
Smoothness	Section 39-1.12	--	12-foot straightedge, must-grind, and PI ₀	12-foot straightedge, must-grind, and PI ₀	12-foot straightedge, must-grind, and PI ₀	12-foot straightedge and must-grind
Asphalt rubber binder viscosity @ 375 °F, centipoises	Section 39-1.02D	Section 39-1.04C	--	--	1,500 – 4,000	1,500 – 4,000
Asphalt modifier	Section 39-1.02D	Section 39-1.04C	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Section 39-1.02D	Section 39-1.04C	--	--	Section 39-1.02D	Section 39-1.02D

Notes:

^a Determine combined aggregate gradation containing RAP under Laboratory Procedure LP-9.

^b The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

^c Report the average of 3 tests from a single split sample.

^d Determine field compaction for any of the following conditions:

- 1/2-inch, 3/8-inch, No. 4 aggregate grading is used and the specified total paved thickness is at least 0.15 foot.
- 3/4-inch aggregate grading is used and the specified total paved thickness is at least 0.20 foot.

^e To determine field compaction use:

- In-place density measurements using the method specified in your QC.
- California Test 309 to determine maximum theoretical density at the frequency specified in California Test 375, Part 5C.

^f Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

^g Determine the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

^h For adjusting the plant controller at the HMA plant.

ⁱ The Engineer waives this specification if HMA contains 10 percent or less of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.

^j Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

^k Voids in mineral aggregate for RHMA-G must be within this range.

For any single quality characteristic except smoothness, if 2 consecutive quality control test results do not comply with the action limits or specifications:

1. Stop production.
2. Notify the Engineer in writing.
3. Take corrective action.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

39-2.03 ENGINEER'S ACCEPTANCE

39-2.03A Testing

The Engineer samples for acceptance testing and tests for:

HMA Acceptance - Standard

Quality Characteristic	Test Method	HMA Type							
		A	B	RHMA-G	OGFC				
Aggregate gradation ^a	CT 202	JMF ± Tolerance ^c	JMF ± Tolerance ^c	JMF ± Tolerance ^c	JMF ± Tolerance ^c				
Sieve						3/4 "	1/2 "	3/8 "	
1/2"						X ^b			
3/8"							X		
No. 4								X	
No. 8						X	X	X	
No. 200						X	X	X	
Sand equivalent (min.) ^d	CT 217	47	42	47	--				
Asphalt binder content (%)	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50				
HMA moisture content (% max.)	CT 226 or CT 370	1.0	1.0	1.0	1.0				
Field compaction (% max. theoretical density) ^{e,f}	CT 375	91 – 97	91 – 97	91 – 97	--				
Stabilometer value (min.) ^{d,g}	CT 366	30	30	--	--				
No. 4 and 3/8" gradings									
1/2" and 3/4" gradings		37	35	23	--				
Air voids content (%) ^{d,h}	CT 367	4 ± 2	4 ± 2	Specification ± 2	--				
Percent of crushed particles	CT 205								
Coarse aggregate (% min.)									
One fractured face						90	25	--	90
Two fractured faces						75	--	90	75
Fine aggregate (% min.)									
(Passing No. 4 sieve and retained on No. 8 sieve.)									
One fractured face	70	20	70	90					
Los Angeles Rattler (% max.)	CT 211	12	--	12	12				
Loss at 100 rev.						45	50	40	40
Loss at 500 rev.									
Fine aggregate angularity (% min.) ⁱ	CT 234	45	45	45	--				
Flat and elongated particles (% max. by weight @ 5:1)	CT 235	Report only	Report only	Report only	Report only				
Voids filled with asphalt (%) ^j	LP-3	76.0 – 80.0	76.0 – 80.0	Report only	--				
No. 4 grading									
3/8" grading						73.0 – 76.0	73.0 – 76.0		
1/2" grading						65.0 – 75.0	65.0 – 75.0		
3/4" grading		65.0 – 75.0	65.0 – 75.0						
Voids in mineral aggregate (% min.) ^j	LP-2								
No. 4 grading						17.0	17.0	--	--
3/8" grading						15.0	15.0	--	--
1/2" grading						14.0	14.0	18.0 – 23.0 ^k	
3/4" grading	13.0	13.0	18.0 – 23.0 ^k						
Dust proportion ^j	LP-4	0.9 – 2.0	0.9 – 2.0	Report only	--				
No. 4 and 3/8" gradings									
1/2" and 3/4" gradings		0.6 – 1.3	0.6 – 1.3						
Smoothness	Section 39-1.12	12-foot straightedge, must-grind, and PI ₀	12-foot straightedge, must-grind, and PI ₀	12-foot straightedge, must-grind, and PI ₀	12-foot straightedge and must-grind				
Asphalt binder	Various	Section 92	Section 92	Section 92	Section 92				

Asphalt rubber binder	Various	--	--	Section 92-1.02(C) and Section 39-1.02D	Section 92-1.02(C) and Section 39-1.02D
Asphalt modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D

^a The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.

^b "X" denotes the sieves the Engineer considers for the specified aggregate gradation.

^c The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

^d The Engineer reports the average of 3 tests from a single split sample.

^e The Engineer determines field compaction for any of the following conditions:

1. 1/2-inch, 3/8-inch, or No.4 aggregate grading is used and the specified total paved thickness is at least 0.15 foot.
2. 3/4-inch aggregate grading is used and the specified total paved thickness is at least 0.20 foot.

^f To determined field compaction, the Engineer uses:

1. California Test 308, Method A, to determine in-place density of each density core.
2. California Test 309 to determine maximum theoretical density at the frequency specified in California Test 375, Part 5C.

^g Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ±5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

^h The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

ⁱ The Engineer waives this specification if HMA contains 10 percent or less of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.

^j Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

^k Voids in mineral aggregate for RHMA-G must be within this range.

No single test result may represent more than the smaller of 750 tons or 1 day's production.

For any single quality characteristic except smoothness, if 2 consecutive acceptance test results do not comply with the specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

The Engineer tests the density core you take from each 250 tons of HMA production. The Engineer determines the percent of maximum theoretical density for each density core by determining the density core's density and dividing by the maximum theoretical density.

The Engineer determines the percent of maximum theoretical density from density cores taken from the final layer measured the full depth of the total paved HMA thickness if any of the following applies:

1. 1/2-inch, 3/8-inch, or No. 4 aggregate grading is used and the specified total paved thickness is at least 0.15 foot and any layer is less than 0.15 foot.
2. 3/4-inch aggregate grading is used and the specified total paved thickness is at least 0.20 foot and any layer is less than 0.20 foot.

For percent of maximum theoretical density, the Engineer determines a deduction for each test result outside the specifications in compliance with:

Reduced Payment Factors for Percent of Maximum Theoretical Density

HMA Type A and B and RHMA-G Percent of Maximum Theoretical Density	Reduced Payment Factor	HMA Type A and B and RHMA-G Percent of Maximum Theoretical Density	Reduced Payment Factor
91.0	0.0000	97.0	0.0000
90.9	0.0125	97.1	0.0125
90.8	0.0250	97.2	0.0250
90.7	0.0375	97.3	0.0375
90.6	0.0500	97.4	0.0500
90.5	0.0625	97.5	0.0625
90.4	0.0750	97.6	0.0750
90.3	0.0875	97.7	0.0875
90.2	0.1000	97.8	0.1000
90.1	0.1125	97.9	0.1125
90.0	0.1250	98.0	0.1250
89.9	0.1375	98.1	0.1375
89.8	0.1500	98.2	0.1500
89.7	0.1625	98.3	0.1625
89.6	0.1750	98.4	0.1750
89.5	0.1875	98.5	0.1875
89.4	0.2000	98.6	0.2000
89.3	0.2125	98.7	0.2125
89.2	0.2250	98.8	0.2250
89.1	0.2375	98.9	0.2375
89.0	0.2500	99.0	0.2500
< 89.0	Remove and Replace	> 99.0	Remove and Replace

39-2.04 TRANSPORTING, SPREADING, AND COMPACTING

Determine the number of rollers needed to obtain the specified density and surface finish.

39-3 METHOD

39-3.01 DESCRIPTION

If HMA is specified as Method, construct it under Section 39-1, "General," this Section 39-3, "Method," and Section 39-5, "Measurement and Payment."

39-3.02 ENGINEER'S ACCEPTANCE

39-3.02A Testing

The Engineer samples for acceptance testing and tests for:

HMA Acceptance - Method

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Aggregate gradation ^a	CT 202	JMF ± Tolerance ^b			
Sand equivalent (min.) ^c	CT 217	47	42	47	--
Asphalt binder content (%)	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (% max.)	CT 226 or CT 370	1.0	1.0	1.0	1.0
Stabilometer value (min.) ^{c,d}	CT 366				
No. 4 and 3/8" gradings		30	30	--	--
1/2" and 3/4" gradings		37	35	23	--
Percent of crushed particles	CT 205				
Coarse aggregate (% min.)					
One fractured face		90	25	--	90
Two fractured faces		75	--	90	75
Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.)					
One fractured face		70	20	70	90
Los Angeles Rattler (% max.)	CT 211				
Loss at 100 rev.		12	--	12	12
Loss at 500 rev.		45	50	40	40
Air voids content (%) ^{c,e}	CT 367	4 ± 2	4 ± 2	Specification ± 2	--
Fine aggregate angularity (% min.) ^f	CT 234	45	45	45	--
Flat and elongated particles (% max. by weight @ 5:1)	CT 235	Report only	Report only	Report only	Report only
Voids filled with asphalt (%) ^g	LP-3			Report only	
No. 4 grading		76.0 – 80.0	76.0 – 80.0		--
3/8" grading		73.0 – 76.0	73.0 – 76.0		
1/2" grading		65.0 – 75.0	65.0 – 75.0		
3/4" grading		65.0 – 75.0	65.0 – 75.0		
Voids in mineral aggregate (% min.) ^g	LP-2				
No. 4 grading		17.0	17.0	--	--
3/8" grading		15.0	15.0	--	--
1/2" grading		14.0	14.0	18.0 – 23.0 ^h	
3/4" grading		13.0	13.0	18.0 – 23.0 ^h	
Dust proportion ^g	LP-4			Report only	
No. 4 and 3/8" gradings		0.9 – 2.0	0.9 – 2.0		--
1/2" and 3/4" gradings		0.6 – 1.3	0.6 – 1.3		
Smoothness	Section 39-1.12	12-foot straightedge and must-grind			
Asphalt binder	Various	Section 92	Section 92	Section 92	Section 92
Asphalt rubber binder	Various	--	--	Section 92-1.02(C) and Section 39-	Section 92-1.02(C) and Section 39-

				1.02D	1.02D
Asphalt modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D

^aThe Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.

^bThe tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

^cThe Engineer reports the average of 3 tests from a single split sample.

^dModify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ±5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

^eThe Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

^fThe Engineer waives this specification if HMA contains 10 percent or less of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.

^gReport only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

^hVoids in mineral aggregate for RHMA-G must be within this range.

No single test result may represent more than the smaller of 750 tons or 1 day's production.

For any single quality characteristic except smoothness, if 2 consecutive acceptance test results do not comply with the specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

39-3.03 SPREADING AND COMPACTING EQUIPMENT

Each paver spreading HMA Type A and Type B must be followed by 3 rollers:

1. One vibratory roller specifically designed to compact HMA. The roller must be capable of at least 2,500 vibrations per minute and must be equipped with amplitude and frequency controls. The roller's gross static weight must be at least 7.5 tons.
2. One oscillating type pneumatic-tired roller at least 4 feet wide. Pneumatic tires must be of equal size, diameter, type, and ply. The tires must be inflated to 60 psi minimum and maintained so that the air pressure does not vary more than 5 psi.
3. One steel-tired, 2-axle tandem roller. The roller's gross static weight must be at least 7.5 tons.

Each roller must have a separate operator. Rollers must be self-propelled and reversible.

Compact RHMA-G under the specifications for compacting HMA Type A and Type B except do not use pneumatic-tired rollers.

Compact OGFC with steel-tired, 2-axle tandem rollers. If placing over 300 tons of OGFC per hour, use at least 3 rollers for each paver. If placing less than 300 tons of OGFC per hour, use at least 2 rollers for each paver. Each roller must weigh between 126 pounds to 172 pounds per linear inch of drum width. Turn the vibrator off.

39-3.04 TRANSPORTING, SPREADING, AND COMPACTING

Pave HMA in maximum 0.25-foot thick compacted layers.

If the surface to be paved is both in sunlight and shade, pavement surface temperatures are taken in the shade.

Spread HMA Type A and Type B only if atmospheric and surface temperatures are:

Minimum Atmospheric and Surface Temperatures

Compacted Layer Thickness, feet	Minimum Atmospheric and Surface Temperatures			
	Atmospheric, ° F		Surface, ° F	
	Unmodified Asphalt Binder	Modified Asphalt Binder ^a	Unmodified Asphalt Binder	Modified Asphalt Binder ^a
< 0.15	55	50	60	55
0.15 – 0.25	45	45	50	50

Note:

^a Except asphalt rubber binder.

If the asphalt binder for HMA Type A and Type B is:

1. Unmodified asphalt binder, complete:
 - 1.1. First coverage of breakdown compaction before the surface temperature drops below 250 °F
 - 1.2. Breakdown and intermediate compaction before the surface temperature drops below 200 °F
 - 1.3. Finish compaction before the surface temperature drops below 150 °F
2. Modified asphalt binder, complete:
 - 2.1. First coverage of breakdown compaction before the surface temperature drops below 240 °F
 - 2.2. Breakdown and intermediate compaction before the surface temperature drops below 180 °F
 - 2.3. Finish compaction before the surface temperature drops below 140 °F

For RHMA-G:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and the surface temperature is at least 60 °F.
2. Complete the first coverage of breakdown compaction before the surface temperature drops below 285 °F.
3. Complete breakdown and intermediate compaction before the surface temperature drops below 250 °F.
4. Complete finish compaction before the surface temperature drops below 200 °F.
5. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For OGFC with unmodified asphalt binder:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and the surface temperature is at least 60 °F.
2. Complete first coverage using 2 rollers before the surface temperature drops below 240 °F.
3. Complete all compaction before the surface temperature drops below 200 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For OGFC with modified asphalt binder except asphalt rubber binder:

1. Only spread and compact if the atmospheric temperature is at least 50 °F and the surface temperature is at least 50 °F.
2. Complete first coverage using 2 rollers before the surface temperature drops below 240 °F.
3. Complete all compaction before the surface temperature drops below 180 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For RHMA-O and RHMA-O-HB:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and surface temperature is at least 60 °F.
2. Complete the 1st coverage using 2 rollers before the surface temperature drops below 280 °F.
3. Complete compaction before the surface temperature drops below 250 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until the mixture is transferred to the paver's hopper or to the pavement surface.

For RHMA-G and OGFC, tarpaulins are not required if the time from discharge to truck until transfer to the paver's hopper or the pavement surface is less than 30 minutes.

HMA compaction coverage is the number of passes needed to cover the paving width. A pass is 1 roller's movement parallel to the paving in either direction. Overlapping passes are part of the coverage being made and are not a subsequent coverage. Do not start a coverage until completing the prior coverage.

Start rolling at the lower edge and progress toward the highest part.

Perform breakdown compaction of each layer of HMA Type A, Type B, and RHMA-G with 3 coverages using a vibratory roller. The speed of the vibratory roller in miles per hour must not exceed the vibrations per minute divided by 1,000. If the HMA layer thickness is less than 0.08 foot, turn the vibrator off. The Engineer may order fewer coverages if the HMA layer thickness is less than 0.15 foot.

Perform intermediate compaction of each layer of HMA Type A and Type B with 3 coverages using a pneumatic-tired roller at a speed not to exceed 5 mph.

Perform finish compaction of HMA Type A, Type B, and RHMA-G with 1 coverage using a steel-tired roller.

Compact OGFC with 2 coverages using steel-tired rollers.

39-4 QUALITY CONTROL / QUALITY ASSURANCE

39-4.01 DESCRIPTION

If HMA is specified as Quality Control / Quality Assurance, construct it under Section 39-1, "General," this Section 39-4, "Quality Control / Quality Assurance," and Section 39-5, "Measurement and Payment."

39-4.02 GENERAL

The QC / QA construction process consists of:

1. Establishing, maintaining, and changing if needed a quality control system providing assurance the HMA complies with the specifications
2. Sampling and testing at specified intervals, or sublots, to demonstrate compliance and to control process
3. The Engineer sampling and testing at specified intervals to verify testing process and HMA quality
4. The Engineer using test results, statistical evaluation of verified quality control tests, and inspection to accept HMA for payment

A lot is a quantity of HMA. The Engineer designates a new lot when:

1. 20 sublots are complete
2. The JMF changes
3. Production stops for more than 30 days

Each lot consists of no more than 20 sublots. A subplot is 750 tons except HMA paved at day's end greater than 250 tons is a subplot. If HMA paved at day's end is less than 250 tons, you may either make this quantity a subplot or include it in the previous subplot's test results for statistical evaluation.

39-4.03 CONTRACTOR QUALITY CONTROL

39-4.03A General

Use a composite quality factor, QF_C , and individual quality factors, QF_{QCi} , to control your process and evaluate your quality control program. For quality characteristics without quality factors, use your quality control plan's action limits to control process.

Control HMA quality including:

1. Materials
2. Proportioning
3. Spreading and compacting
4. Finished roadway surface

Develop, implement, and maintain a quality control program that includes:

1. Inspection
2. Sampling
3. Testing

39-4.03B Quality Control Plan

With the JMF submittal, submit a written Quality Control Plan (QCP). The QCP must comply with the Department's Quality Control Manual for Hot Mix Asphalt Production and Placement. Discuss the QCP with the Engineer during the prepaving conference.

The Engineer reviews each QCP within 5 business days from the submittal. Hold HMA production until the Engineer accepts the QCP in writing. The Engineer's QCP acceptance does not mean your compliance with the QCP will result in acceptable HMA. Section 39-1.05, "Engineer's Acceptance," specifies HMA acceptance.

The QCP must include the name and qualifications of a Quality Control Manager. The Quality Control Manager administers the QCP and during paving must be at the job site within 3 hours of receiving notice. The Quality Control Manager must not be any of the following on the project:

1. Foreman
2. Production or paving crewmember
3. Inspector
4. Tester

The QCP must include action limits and details of corrective action you will take if a test result for any quality characteristic falls outside an action limit.

As work progresses, you must submit a written QCP supplement to change quality control procedures, personnel, tester qualification status, or laboratory accreditation status.

39-4.03C Quality Control Inspection, Sampling, And Testing

Sample, test, inspect, and manage HMA quality control.

Provide a roadway inspector while HMA paving activities are in progress. Provide a plant inspector during HMA production.

Inspectors must comply with the Department's Quality Control Manual for Hot Mix Asphalt Production and Placement.

Provide a testing laboratory and personnel for quality control testing. Provide the Engineer unrestricted access to the quality control activities. Before providing services for the project, the Engineer reviews, accredits, and qualifies the testing laboratory and personnel under the Department's Independent Assurance Program.

The minimum random sampling and testing for quality control is:

Minimum Quality Control – QC / QA

Quality Characteristic	Test Method	Minimum Sampling and Testing Frequency	HMA Type			Location of Sampling	Max. Reporting Time Allowance
			A	B	RHMA-G		
Aggregate gradation ^a	CT 202	1 per 750 tons	JMF ± Tolerance ^b	JMF ± Tolerance ^b	JMF ± Tolerance ^b	CT 125	24 hours
Asphalt binder content (%)	CT 379 or 382		JMF ±0.45	JMF ±0.45	JMF ±0.5	Loose Mix Behind Paver See CT 125	
Field compaction (% max. theoretical density) ^{c,d}	QC Plan		92 - 96	92 - 96	91 - 96	QC Plan	
Aggregate moisture content at continuous mixing plants and RAP moisture content at continuous mixing plants and batch mixing plants ^e	CT 226 or CT 370	2 per day during production	--	--	--	Stock-piles or cold feed belts	--
Sand equivalent (min.) ^f	CT 217	1 per 750 tons	47	42	47	CT 125	24 hours
HMA moisture content (% max.)	CT 226 or CT 370	1 per 2,500 tons but not less than 1 per paving day	1.0	1.0	1.0	Loose Mix Behind Paver See CT 125	24 hours
Stabilometer Value (min.) ^{f,g} No. 4 and 3/8" gradings 1/2" and 3/4" gradings	CT 366	1 per 4,000 tons or 2 per 5 business days, whichever is more	30	30	--		48 hours
			37	35	23		
Air voids content (%) ^{f,h}	CT 367		4 ± 2	4 ± 2	Specification ± 2		

Percent of crushed particles coarse aggregate (% min.) One fractured face Two fractured faces	CT 205	As necessary and designated in QCP. At least once per project.	90	25	--	CT 125	48 hours
Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face			75	--	90		
Los Angeles Rattler (% max.) Loss at 100 rev. Loss at 500 rev.	CT 211		12 45	-- 50	12 40	CT 125	
Fine aggregate angularity (% min.) ⁱ	CT 234		45	45	45	CT 125	
Flat and elongated particle (% max. by weight @ 5:1)	CT 235		Report only	Report only	Report only	CT 125	
Voids filled with asphalt (%) ^j No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-3		76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	Report only	LP-3	
Voids in mineral aggregate (% min.) ^j No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-2		17.0 15.0 14.0 13.0	17.0 15.0 14.0 13.0	-- -- 18.0 – 23.0 ^k 18.0 – 23.0 ^k	LP-2	
Dust proportion ^j No. 4 and 3/8" gradings 1/2" and 3/4" gradings	LP-4	0.9 – 2.0 0.6 – 1.3	0.9 – 2.0 0.6 – 1.3	Report only	LP-4		
Smoothness	Section 39-1.12	--	12-foot straight-edge, must-grind, and PI ₀	12-foot straight-edge, must-grind, and PI ₀	12-foot straight-edge, must-grind, and PI ₀	--	
Asphalt rubber binder viscosity @ 375 °F, centipoises	Section 39-1.02D	--	--	--	1,500 – 4,000	Section 39-1.02D	24 hours
Crumb rubber modifier	Section 39-1.02D	--	--	--	Section 39-1.02D	Section 39-1.02D	48 hours

Notes:

^a Determine combined aggregate gradation containing RAP under Laboratory Procedure LP-9.

^b The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

^c Determine field compaction for any of the following conditions:

1. 1/2-inch, 3/8-inch, No. 4 aggregate grading is used and the specified total paved thickness is at least 0.15 foot.
2. 3/4-inch aggregate grading is used and the specified total paved thickness is at least 0.20 foot.

^d To determine field compaction use:

1. In-place density measurements using the method specified in your QC.
2. California Test 309 to determine maximum theoretical density at the frequency specified in California Test 375, Part 5C.

^e For adjusting the plant controller at the HMA plant.

^f Report the average of 3 tests from a single split sample.

^g Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

^h Determine the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

ⁱ The Engineer waives this specification if HMA contains 10 percent or less of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.

^j Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

^k Voids in mineral aggregate for RHMA-G must be within this range.

Within the specified reporting time, submit written test results including:

1. Sampling location, quantity, and time
2. Testing results
3. Supporting data and calculations

If test results for any quality characteristic are beyond the action limits in the QCP, take corrective actions. Document the corrective actions taken in the inspection records under Section 39-4.03E, "Records of Inspection and Testing."

Stop production, notify the Engineer in writing, take corrective action, and demonstrate compliance with the specifications before resuming production and placement on the State highway if:

1. A lot's composite quality factor, QF_C , or an individual quality factor, QF_{QC_i} for $i = 3, 4$, or 5 , is below 0.90 determined under Section 39-4.03F, "Statistical Evaluation," using quality control data
2. An individual quality factor, QF_{QC_i} for $i = 1$ or 2 , is below 0.75 using quality control data
3. Quality characteristics for which a quality factor, QF_{QC_i} , is not determined has 2 consecutive quality control tests not in compliance with the specifications

39-4.03D Charts And Records

Record sampling and testing results for quality control on forms provided in the "Quality Control Manual for Hot Mix Asphalt," or on forms you submit with the QCP. The QCP must also include form posting locations and submittal times.

Submit quality control test results using the Department's statistical evaluation program, HMAPay, available at

www.dot.ca.gov/hq/construc/hma/index.htm

39-4.03E Records Of Inspection And Testing

During HMA production, submit in writing a daily:

1. HMA Construction Daily Record of Inspection. Also make this record available at the HMA plant and job site each day.

2. HMA Inspection and Testing Summary. Include in the summary:
 - 2.1. QC worksheet with updated test results from the HMAPay program
 - 2.2. Test forms with the testers' signatures and Quality Control Manager's initials.
 - 2.3. Inspection forms with the inspectors' signatures and Quality Control Manager's initials.
 - 2.4. A list and explanation of deviations from the specifications or regular practices.
 - 2.5. A signed statement by the Quality Control Manager that says:

"It is hereby certified that the information contained in this record is accurate, and that information, tests, or calculations documented herein comply with the specifications of the contract and the standards set forth in the testing procedures. Exceptions to this certification are documented as part of this record."

Retain for inspection the records generated as part of quality control including inspection, sampling, and testing for at least 3 years after final acceptance.

39-4.03F Statistical Evaluation

General

Determine a lot's composite quality factor, QF_C , and the individual quality factors, QF_{QC_i} . Perform statistical evaluation calculations to determine these quality factors based on quality control test results for:

1. Aggregate gradation
2. Asphalt binder content
3. Percent of maximum theoretical density

The Engineer grants a waiver and you must use 1.0 as the individual quality factor for percent of maximum theoretical density, QF_{QC5} , for HMA paved in:

1. Areas where the total paved thickness is less than 0.15 foot
2. Areas where the total paved thickness is less than 0.20 foot and a 3/4-inch grading is specified and used
3. Dig outs
4. Leveling courses
5. Areas where, in the opinion of the Engineer, compaction or compaction measurement by conventional methods is impeded

Statistical Evaluation Calculations

Use the Variability-Unknown / Standard Deviation Method to determine the percentage of a lot not in compliance with the specifications.

Determine the percentage of work not in compliance with the specification limits for each quality characteristic as follows:

1. Calculate the arithmetic mean (\bar{X}) of the test values

$$\bar{X} = \frac{\sum X}{n}$$

where:

- x = individual test values
- n = number of test values

2. Calculate the standard deviation

$$s = \sqrt{\frac{n(\sum x^2) - (\sum x)^2}{n(n-1)}}$$

where:

- $\sum(x^2)$ = sum of the squares of individual test values
- $(\sum x)^2$ = sum of the individual test values squared
- n = number of test values

3. Calculate the upper quality index (Q_u)

$$Q_u = \frac{USL - \bar{X}}{s}$$

where:

- USL = target value plus the production tolerance or upper specification limit
- s = standard deviation
- \bar{X} = arithmetic mean

4. Calculate the lower quality index (Q_L);

$$Q_L = \frac{\bar{X} - LSL}{s}$$

where:

- LSL = target value minus production tolerance or lower specification limit
- s = standard deviation
- \bar{X} = arithmetic mean

5. From the table, Upper Quality Index Q_U or Lower Quality Index Q_L , of this Section 39-4.03F, "Statistical Evaluation", determine P_U ;

where:

- P_U = the estimated percentage of work outside the USL.
- $P_U = 0$, when USL is not specified.

6. From the table, Upper Quality Index Q_U or Lower Quality Index Q_L , of this Section 39-4.03F, "Statistical Evaluation," determine P_L ;

where:

- P_L = the estimated percentage of work outside the LSL.
- $P_L = 0$, when LSL is not specified.

7. Calculate the total estimated percentage of work outside the USL and LSL, percent defective

$$\text{Percent defective} = P_U + P_L$$

P_U and P_L are determined from:

P _U or P _L	Upper Quality Index Q _U or Lower Quality Index Q _L												
	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
0	1.72	1.88	1.99	2.07	2.13	2.20	2.28	2.34	2.39	2.44	2.48	2.51	2.56
1	1.64	1.75	1.82	1.88	1.91	1.96	2.01	2.04	2.07	2.09	2.12	2.14	2.16
2	1.58	1.66	1.72	1.75	1.78	1.81	1.84	1.87	1.89	1.91	1.93	1.94	1.95
3	1.52	1.59	1.63	1.66	1.68	1.71	1.73	1.75	1.76	1.78	1.79	1.80	1.81
4	1.47	1.52	1.56	1.58	1.60	1.62	1.64	1.65	1.66	1.67	1.68	1.69	1.70
5	1.42	1.47	1.49	1.51	1.52	1.54	1.55	1.56	1.57	1.58	1.59	1.59	1.60
6	1.38	1.41	1.43	1.45	1.46	1.47	1.48	1.49	1.50	1.50	1.51	1.51	1.52
7	1.33	1.36	1.38	1.39	1.40	1.41	1.41	1.42	1.43	1.43	1.44	1.44	1.44
8	1.29	1.31	1.33	1.33	1.34	1.35	1.35	1.36	1.36	1.37	1.37	1.37	1.38
9	1.25	1.27	1.28	1.28	1.29	1.29	1.30	1.30	1.30	1.31	1.31	1.31	1.31
10	1.21	1.23	1.23	1.24	1.24	1.24	1.25	1.25	1.25	1.25	1.25	1.26	1.26
11	1.18	1.18	1.19	1.19	1.19	1.19	1.20	1.20	1.20	1.20	1.20	1.20	1.20
12	1.14	1.14	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15
13	1.10	1.10	1.10	1.10	1.10	1.10	1.11	1.11	1.11	1.11	1.11	1.11	1.11
14	1.07	1.07	1.07	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06
15	1.03	1.03	1.03	1.03	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02
16	1.00	0.99	0.99	0.99	0.99	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
17	0.97	0.96	0.95	0.95	0.95	0.95	0.94	0.94	0.94	0.94	0.94	0.94	0.94
18	0.93	0.92	0.92	0.92	0.91	0.91	0.91	0.91	0.90	0.90	0.90	0.90	0.90
19	0.90	0.89	0.88	0.88	0.88	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
20	0.87	0.86	0.85	0.85	0.84	0.84	0.84	0.83	0.83	0.83	0.83	0.83	0.83
21	0.84	0.82	0.82	0.81	0.81	0.81	0.80	0.80	0.80	0.80	0.80	0.80	0.79
22	0.81	0.79	0.79	0.78	0.78	0.77	0.77	0.77	0.76	0.76	0.76	0.76	0.76
23	0.77	0.76	0.75	0.75	0.74	0.74	0.74	0.73	0.73	0.73	0.73	0.73	0.73
24	0.74	0.73	0.72	0.72	0.71	0.71	0.70	0.70	0.70	0.70	0.70	0.70	0.70
25	0.71	0.70	0.69	0.69	0.68	0.68	0.67	0.67	0.67	0.67	0.67	0.67	0.66
26	0.68	0.67	0.67	0.65	0.65	0.65	0.64	0.64	0.64	0.64	0.64	0.64	0.63
27	0.65	0.64	0.63	0.62	0.62	0.62	0.61	0.61	0.61	0.61	0.61	0.61	0.60
28	0.62	0.61	0.60	0.59	0.59	0.59	0.58	0.58	0.58	0.58	0.58	0.58	0.57
29	0.59	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.55	0.55	0.55	0.55	0.54
30	0.56	0.55	0.54	0.54	0.53	0.53	0.52	0.52	0.52	0.52	0.52	0.52	0.52
31	0.53	0.52	0.51	0.51	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.49	0.49
32	0.50	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.46	0.46	0.46	0.46
33	0.47	0.48	0.45	0.45	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43
34	0.45	0.43	0.43	0.42	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.40
35	0.42	0.40	0.40	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.38	0.38	0.38
36	0.39	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
37	0.36	0.35	0.34	0.34	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.32
38	0.33	0.32	0.32	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.30	0.30	0.30
39	0.30	0.30	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
40	0.28	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
41	0.25	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23
42	0.23	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
43	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
44	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
45	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
46	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10
47	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
48	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
49	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

1. If the value of Q_U or Q_L does not correspond to a value in the table, use the next lower value.
2. If Q_U or Q_L are negative values, P_U or P_L is equal to 100 minus the table value for P_U or P_L.

Quality Factor Determination

Determine individual quality factors, QF_{QC_i} , using percent defective = $P_U + P_L$ and:

Quality Factor	Quality Factors												
	Maximum Allowable Percent Defective ($P_U + P_L$)												
	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
1.05			0	0	0	0	0	0	0	0	0	0	0
1.04			0	1	3	5	4	4	4	3	3	3	3
1.03		0	2	4	6	8	7	7	6	5	5	4	4
1.02		1	3	6	9	11	10	9	8	7	7	6	6
1.01	0	2	5	8	11	13	12	11	10	9	8	8	7
1.00	22	20	18	17	16	15	14	13	12	11	10	9	8
0.99	24	22	20	19	18	17	16	15	14	13	11	10	9
0.98	26	24	22	21	20	19	18	16	15	14	13	12	10
0.97	28	26	24	23	22	21	19	18	17	16	14	13	12
0.96	30	28	26	25	24	22	21	19	18	17	16	14	13
0.95	32	29	28	26	25	24	22	21	20	18	17	16	14
0.94	33	31	29	28	27	25	24	22	21	20	18	17	15
0.93	35	33	31	29	28	27	25	24	22	21	20	18	16
0.92	37	34	32	31	30	28	27	25	24	22	21	19	18
0.91	38	36	34	32	31	30	28	26	25	24	22	21	19
0.90	39	37	35	34	33	31	29	28	26	25	23	22	20
0.89	41	38	37	35	34	32	31	29	28	26	25	23	21
0.88	42	40	38	36	35	34	32	30	29	27	26	24	22
0.87	43	41	39	38	37	35	33	32	30	29	27	25	23
0.86	45	42	41	39	38	36	34	33	31	30	28	26	24
0.85	46	44	42	40	39	38	36	34	33	31	29	28	25
0.84	47	45	43	42	40	39	37	35	34	32	30	29	27
0.83	49	46	44	43	42	40	38	36	35	33	31	30	28
0.82	50	47	46	44	43	41	39	38	36	34	33	31	29
0.81	51	49	47	45	44	42	41	39	37	36	34	32	30
0.80	52	50	48	46	45	44	42	40	38	37	35	33	31
0.79	54	51	49	48	46	45	43	41	39	38	36	34	32
0.78	55	52	50	49	48	46	44	42	41	39	37	35	33
0.77	56	54	52	50	49	47	45	43	42	40	38	36	34
0.76	57	55	53	51	50	48	46	44	43	41	39	37	35
0.75	58	56	54	52	51	49	47	46	44	42	40	38	36
Reject	60	57	55	53	52	51	48	47	45	43	41	40	37
	61	58	56	55	53	52	50	48	46	44	43	41	38
	62	59	57	56	54	53	51	49	47	45	44	42	39
	63	61	58	57	55	54	52	50	48	47	45	43	40
	64	62	60	58	57	55	53	51	49	48	46	44	41

Reject Values Greater Than Those Shown Above

Notes:

- To obtain a quality factor when the estimated percent outside specification limits from table, "Upper Quality Index Q_U or Lower Quality Index Q_L ," does not correspond to a value in the table, use the next larger value.

Compute the composite of single quality factors, QF_C , for a lot using:

$$QF_C = \sum_{i=1}^5 w_i QF_{QC_i}$$

where:

$QF_C =$ the composite quality factor for the lot rounded to 2 decimal places.

- QF_{QCi} = the quality factor for the individual quality characteristic.
 w = the weighting factor listed in the table HMA Acceptance – QC / QA.
 i = the quality characteristic index number in the table HMA Acceptance – QC / QA.

39-4.04 ENGINEER'S QUALITY ASSURANCE

39-4.04A General

The Engineer assures quality by:

1. Reviewing mix designs and proposed JMF
2. Inspecting procedures
3. Conducting oversight of quality control inspection and records
4. Verification sampling and testing during production and paving

39-4.04B Verification Sampling And Testing

General

The Engineer samples:

1. Aggregate to verify gradation
2. HMA to verify asphalt binder content

Verification

For aggregate gradation and asphalt binder content, the minimum ratio of verification testing frequency to quality control testing frequency is 1:5. The Engineer performs at least 3 verification tests per lot.

Using the t-test, the Engineer compares quality control tests results for aggregate gradation and asphalt binder content with corresponding verification test results. The Engineer uses the average and standard deviation of up to 20 sequential sublots for the comparison. The Engineer uses production start-up evaluation tests to represent the first subplot. When there are less than 20 sequential sublots, the Engineer uses the maximum number of sequential sublots available. The 21st subplot becomes the 1st subplot ($n = 1$) in the next lot.

The t-value for a group of test data is computed as follows:

$$t = \frac{|\bar{X}_c - \bar{X}_v|}{S_p \sqrt{\frac{1}{n_c} + \frac{1}{n_v}}} \quad \text{and} \quad S_p^2 = \frac{S_c^2(n_c - 1) + S_v^2(n_v - 1)}{n_c + n_v - 2}$$

where:

- n_c = Number of quality control tests (2 minimum, 20 maximum).
 n_v = Number of verification tests (minimum of 1 required).
 \bar{X}_c = Mean of quality control tests.
 \bar{X}_v = Mean of verification tests.
 S_p = Pooled standard deviation (When $n_v = 1$, $S_p = S_c$).
 S_c = Standard deviation of quality control tests.
 S_v = Standard deviation of verification tests (when $n_v > 1$).

The comparison of quality control test results and the verification test results is at a level of significance of $\alpha = 0.025$. The Engineer computes t and compares it to the critical t -value, t_{crit} , from:

Critical T-Value

Degrees of freedom (n_c+n_v-2)	t_{crit} (for $\alpha = 0.025$)	Degrees of freedom (n_c+n_v-2)	t_{crit} (for $\alpha = 0.025$)
1	24.452	18	2.445
2	6.205	19	2.433
3	4.177	20	2.423
4	3.495	21	2.414
5	3.163	22	2.405
6	2.969	23	2.398
7	2.841	24	2.391
8	2.752	25	2.385
9	2.685	26	2.379
10	2.634	27	2.373
11	2.593	28	2.368
12	2.560	29	2.364
13	2.533	30	2.360
14	2.510	40	2.329
15	2.490	60	2.299
16	2.473	120	2.270
17	2.458	∞	2.241

If the t -value computed is less than or equal to t_{crit} , quality control test results are verified.

If the t -value computed is greater than t_{crit} and both \bar{X}_v and \bar{X}_c comply with acceptance specifications, the quality control tests are verified. You may continue to produce and place HMA with the following allowable differences:

1. $|\bar{X}_v - \bar{X}_c| \leq 1.0$ percent for any grading
2. $|\bar{X}_v - \bar{X}_c| \leq 0.1$ percent for asphalt binder content

If the t -value computed is greater than t_{crit} and the $|\bar{X}_v - \bar{X}_c|$ for grading or asphalt binder content are greater than the allowable differences, quality control test results are not verified and:

1. The Engineer notifies you in writing.
2. You and the Engineer must investigate why the difference exist.
3. If the reason for the difference cannot be found and corrected, the Engineer's test results are used for acceptance and pay.

39-4.05 ENGINEER'S ACCEPTANCE

39-4.05A Testing

The Engineer samples for acceptance testing and tests for:

HMA Acceptance – QC / QA

Index (i)	Quality Characteristic				Weight -ing Factor (w)	Test Method	HMA Type		
							A	B	RHMA-G
	Aggregate gradation ^a					CT 202	JMF ± Tolerance ^c		
	Sieve	3/4"	1/2"	3/8"					
1	1/2"	X ^b	--	--	0.05				
1	3/8"	--	X	--	0.05				
1	No. 4	--	--	X	0.05				
2	No. 8	X	X	X	0.10				
3	No. 200	X	X	X	0.15				
4	Asphalt binder content (%)				0.30	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.5
5	Field compaction (% max. theoretical density) ^{d,e}				0.40	CT 375	92 – 96	92 – 96	91 – 96
	Sand equivalent (min.) ^f					CT 217	47	42	47
	Stabilometer value (min.) ^{f, g}					CT 366			
	No. 4 and 3/8" gradings						30	30	--
	1/2" and 3/4" gradings					37	35	23	
	Air voids content (%) ^{f, h}					CT 367	4 ± 2	4 ± 2	Specifica- tion ± 2
	Percent of crushed particles coarse aggregate (% min.)					CT 205			
	One fractured face						90	25	--
	Two fractured faces					75	--	90	
	Fine aggregate (% min)								
	(Passing No. 4 sieve and retained on No. 8 sieve.)								
	One fractured face					70	20	70	
	HMA moisture content (% max.)					CT 226 or CT 370	1.0	1.0	1.0
	Los Angeles Rattler (% max.)					CT 211			
	Loss at 100 rev.						12	--	12
	Loss at 500 rev.					45	50	40	
	Fine aggregate angularity (% min.) ⁱ					CT 234	45	45	45
	Flat and elongated particle (% max. by weight @ 5:1)					CT 235	Report only	Report only	Report only
	Voids in mineral aggregate (% min.) ^j					LP-2			(Note k)
	No. 4 grading						17.0	17.0	--
	3/8" grading						15.0	15.0	--
	1/2" grading						14.0	14.0	18.0 - 23.0
	3/4" grading					13.0	13.0	18.0 - 23.0	
	Voids filled with asphalt (%) ^j					LP-3			Report only
	No. 4 grading						76.0 - 80.0	76.0 - 80.0	
	3/8" grading						73.0 - 76.0	73.0 - 76.0	
	1/2" grading						65.0 - 75.0	65.0 - 75.0	
	3/4" grading					65.0 - 75.0	65.0 - 75.0		
	Dust proportion ^j					LP-4			Report only
	No. 4 and 3/8" gradings						0.9 - 2.0	0.9 – 2.0	
	1/2" and 3/4" gradings					0.6 - 1.3	0.6 – 1.3		

	Smoothness		Section 39-1.12	12-foot straight-edge, must-grind, and PI ₀	12-foot straight-edge, must-grind, and PI ₀	12-foot straight-edge, must-grind, and PI ₀
	Asphalt binder		Various	Section 92	Section 92	Section 92
	Asphalt rubber binder		Various	--	--	Section 92-1.02(C) and Section 39-1.02D
	Asphalt modifier		Various	--	--	Section 39-1.02D
	Crumb rubber modifier		Various	--	--	Section 39-1.02D

Notes:

- ^a The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.
- ^b "X" denotes the sieves the Engineer considers for the specified aggregate gradation.
- ^c The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."
- ^d The Engineer determines field compaction for any of the following conditions:
1. 1/2-inch, 3/8-inch, or No.4 aggregate grading is used and the specified total paved thickness is at least 0.15 foot.
 2. 3/4-inch aggregate grading is used and the specified total paved thickness is at least 0.20 foot.
- ^e To determined field compaction, the Engineer uses:
1. California Test 308, Method A, to determine in-place density of each density core.
 2. California Test 309 to determine maximum theoretical density at the frequency specified in California Test 375, Part 5C.
- ^f The Engineer reports the average of 3 tests from a single split sample.
- ^g Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."
- ^h The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.
- ⁱ The Engineer waives this specification if HMA contains 10 percent or less of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.
- ^j Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.
- ^k Voids in mineral aggregate for RHMA-G must be within this range.

The Engineer determines the percent of maximum theoretical density from the average density of 3 density cores you take from every 750 tons of production or part thereof divided by the maximum theoretical density.

The Engineer determines the percent of maximum theoretical density from density cores taken from the final layer measured the full depth of the total paved HMA thickness if any of the following applies:

1. If 1/2-inch, 3/8-inch, or No. 4 aggregate grading is used and the specified total paved thickness is at least 0.15 foot and any layer is less than 0.15 foot.
2. If 3/4-inch aggregate grading is used and the specified total paved thickness is at least 0.20 foot and any layer is less than 0.20 foot.

The Engineer calculates QF_{QC_i} for i = 1, 2, 3, and 4 using quality control data and QF_{QC_i} for i = 5 using quality assurance data.

The Engineer stops production and terminates a lot if:

1. The lot's composite quality factor, QF_C , or an individual quality factor, QF_{QC_i} for $i = 3, 4,$ or $5,$ is below 0.90 determined under Section 39-4.03F, "Statistical Evaluation"
2. An individual quality factor, QF_{QC_i} for $i = 1$ or $2,$ is below 0.75
3. Quality characteristics for which a quality factor, $QF_{QC_i},$ is not determined has 2 consecutive acceptance or quality control tests not in compliance with the specifications

For any single quality characteristic for which a quality factor, $QF_{QC_i},$ is not determined, except smoothness, if 2 consecutive acceptance test results do not comply with specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

39-4.05B Statistical Evaluation, Determination Of Quality Factors And Acceptance

Statistical Evaluation and Determination of Quality Factors

To determine the individual quality factor, $QF_{QC_i},$ for any quality factor $i = 1$ through 5 or a lot's composite quality factor, $QF_C,$ for acceptance and payment adjustment, the Engineer uses the evaluation specifications under Section 39-4.03F, "Statistical Evaluation," and:

1. Verified quality control test results for aggregate gradation
2. Verified quality control test results for asphalt binder content
3. The Engineer's test results for percent of maximum theoretical density

Lot Acceptance Based on Quality Factors

The Engineer accepts a lot based on the quality factors determined for aggregate gradation and asphalt binder content, QF_{QC_i} for $i = 1$ through $4,$ using the total number of verified quality control test result values and the total percent defective ($P_U + P_L$).

The Engineer accepts a lot based on the quality factor determined for maximum theoretical density, $QF_{QC_5},$ using the total number of test result values from density cores and the total percent defective ($P_U + P_L$).

The Engineer calculates the quality factor for the lot, $QF_C,$ which is a composite of weighted individual quality factors, $QF_{QC_i},$ determined for each quality characteristic in the HMA Acceptance – QC / QA table in Section 39-4.05A, "Testing."

The Engineer accepts a lot based on quality factors if:

1. The current composite quality factor, $QF_C,$ is 0.90 or greater
2. Each individual quality factor, QF_{QC_i} for $i = 3, 4,$ and $5,$ is 0.90 or greater
3. Each individual quality factor, QF_{QC_i} for $i = 1$ and $2,$ is 0.75 or greater

No single quality characteristic test may represent more than the smaller of 750 tons or 1 day's production.

Payment Adjustment

If a lot is accepted, the Engineer adjusts payment with the following formula:

$$PA = \sum_{i=1}^n HMA CP * w_i * [QF_{QC_i} * (HMATT - WHMATT_i) + WHMATT_i] - (HMA CP * HMATT)$$

where:

PA =	Payment adjustment rounded to 2 decimal places.
HMA CP =	HMA contract price.
HMATT =	HMA total tons represented in the lot.
WHMATT _i =	Total tons of waived quality characteristic HMA.
QF _{QC_i} =	Running quality factor for the individual quality characteristic. QF _{QC_i} for i = 1 through 4 must be from verified Contractor's QC results. QF _{QC5} must be determined from the Engineer's results on density cores taken for percent of maximum theoretical density determination.
w =	Weighting factor listed in the HMA acceptance table.
i =	Quality characteristic index number in the HMA acceptance table.

If the payment adjustment is a negative value, the Engineer deducts this amount from payment. If the payment adjustment is a positive value, the Engineer adds this amount to payment.

The 21st subplot becomes the 1st subplot (n = 1) in the next lot. When the 21st sequential subplot becomes the 1st subplot, the previous 20 sequential sublots become a lot for which the Engineer determines a quality factor. The Engineer uses this quality factor to pay for the HMA in the lot. If the next lot consists of less than 8 sublots, these sublots must be added to the previous lot for quality factor determination using 21 to 27 sublots.

39-4.05C Dispute Resolution

For a lot, if you or the Engineer dispute any quality factor, QF_{QC_i}, or verification test result, every subplot in that lot must be retested.

Referee tests must be performed under the specifications for acceptance testing.

Any quality factor, QF_{QC_i}, must be determined using the referee tests.

For any quality factor, QF_{QC_i}, for i = 1 through 5, dispute resolution:

1. If the difference between the quality factors for QF_{QC_i} using the referee test result and the disputed test result is less than or equal to 0.01, the original test result is correct.
2. If the difference between the quality factor for QF_{QC_i} using the referee test result and the disputed test result is more than 0.01, the quality factor determined from the referee tests supersedes the previously determined quality factor.

39-5 MEASUREMENT AND PAYMENT

39-5.01 MEASUREMENT

The contract item for HMA is measured by weight. The weight of each HMA mixture designated in the Engineer's Estimate must be the combined mixture weight.

If tack coat, asphalt binder, and asphaltic emulsion are paid with separate contract items, their contract items are measured under Section 92, "Asphalts," or Section 94, "Asphaltic Emulsions," as the case may be.

If recorded batch weights are printed automatically, the contract item for HMA is measured by using the printed batch weights, provided:

1. Total aggregate and supplemental fine aggregate weight per batch is printed. If supplemental fine aggregate is weighed cumulatively with the aggregate, the total aggregate batch weight must include the supplemental fine aggregate weight.
2. Total asphalt binder weight per batch is printed.
3. Each truckload's zero tolerance weight is printed before weighing the first batch and after weighing the last batch.
4. Time, date, mix number, load number and truck identification is correlated with a load slip.
5. A copy of the recorded batch weights is certified by a licensed weighmaster and submitted to the Engineer.

The contract item for placing HMA dike is measured by the linear foot along the completed length. The contract item for placing HMA in miscellaneous areas is measured as the in-place compacted area in square yards. In addition to the quantities measured on a linear foot or square yard basis, the HMA for dike and miscellaneous areas are measured by weight.

The contract item for geosynthetic pavement interlayer is measured by the square yard for the actual pavement area covered.

39-5.02 PAYMENT

The contract prices paid per ton for hot mix asphalt as designated in the Engineer's Estimate include full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in constructing hot mix asphalt, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

If HMA is specified to comply with Section 39-4, "Quality Control / Quality Assurance," the Engineer adjusts payment under that section.

Full compensation for the Quality Control Plan and prepping conference is included in the contract prices paid per ton for hot mix asphalt as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Full compensation for performing and submitting mix designs and for Contractor sampling, testing, inspection, testing facilities, and preparation and submittal of results is included in the contract prices paid per ton for HMA as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Full compensation for reclaimed asphalt pavement is included in the contract prices paid per ton for HMA as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

The contract price paid per ton for hot mix asphalt (leveling) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in hot mix asphalt (leveling), complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The State pays for HMA dike at the contract price per linear foot for place HMA dike and by the ton for HMA. The contract prices paid per linear foot for place hot mix asphalt dike as designated in the Engineer's Estimate include full compensation for furnishing all labor, tools, equipment, and incidentals, and for doing all the work involved in placing HMA dike, complete in place, including excavation, backfill, and preparation of the area to receive the dike, as shown

on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The State pays for HMA specified to be a miscellaneous area at the contract price per square yard for place hot mix asphalt (miscellaneous area) and per ton for hot mix asphalt. The contract price paid per square yard for place hot mix asphalt (miscellaneous area) includes full compensation for furnishing all labor, tools, equipment, and incidentals, and for doing all the work involved in placing HMA (miscellaneous area) complete in place, including excavation, backfill, and preparation of the area to receive HMA (miscellaneous area), as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

If the Quality Control / Quality Assurance construction process is specified, HMA placed in dikes and miscellaneous areas is paid for at the contract price per ton for hot mix asphalt under Section 39-4, "Quality Control / Quality Assurance." Section 39-4.05B, "Statistical Evaluation, Determination of Quality Factors and Acceptance," does not apply to HMA placed in dikes and miscellaneous areas.

If there are no contract items for place hot mix asphalt dike and place hot mix asphalt (miscellaneous area) and the work is specified, full compensation for constructing HMA dikes and HMA (miscellaneous areas) including excavation, backfill, and preparation of the area to receive HMA dike or HMA (miscellaneous area) is included in the contract price paid per ton for the hot mix asphalt designated in the Engineer's Estimate and no separate payment will be made therefor.

The contract price paid per square yard for geosynthetic pavement interlayer of the type shown on the verified Bid Item List includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in placing geosynthetic pavement interlayer, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The contract price paid per ton for paving asphalt (binder, geosynthetic pavement interlayer) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying paving asphalt (binder, geosynthetic pavement interlayer), complete in place, including spreading sand to cover exposed binder material, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

Full compensation for small quantities of HMA placed on geosynthetic pavement interlayer to prevent displacement during construction is included in the contract price paid per ton for the HMA being paved over the interlayer and no separate payment will be made therefor.

The contract price paid per ton for tack coat includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying tack coat, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The Engineer does not adjust payment for increases or decreases in the quantities for tack coat, regardless of the reason for the increase or decrease. Section 4-1.03B, "Increased or Decreased Quantities," does not apply to the items for tack coat.

Full compensation for performing smoothness testing, submitting written and electronic copies of tests, and performing corrective work including applying fog seal coat is included in the contract price paid per ton for the HMA designated in the Engineer's Estimate and no separate payment will be made therefor.

Full compensation for spreading sand on RHMA-G, RHMA-O, and RHMA-O-HB surfaces and for sweeping and removing excess sand is included in the contract price paid per ton for

rubberized hot mix asphalt as designated in the Engineer's Estimate and no separate payment will be made therefor.

If the dispute resolution ITP determines the Engineer's test results are correct, the Engineer deducts the ITP's testing costs from payments. If the ITP determines your test results are correct, the State pays the ITP's testing costs. If, in the Engineer's opinion, work completion is delayed because of incorrect Engineer test results, the Department makes payment and time adjustments under Section 8-1.09, "Delays."

SECTION 56 SIGNS

(Issued 07-20-12)

In Section 56-2.03 replace the 4th paragraph with:

Backfill material for metal posts shall consist of minor concrete conforming to the provisions in Section 90-10, "Minor Concrete," and shall contain not less than 463 pounds of cementitious material per cubic yard.

SECTION 85 PAVEMENT MARKERS

(Issued 07-31-07)

In Section 85-1.06 replace the 6th paragraph with:

Pavement markers shall not be placed on new hot mix asphalt surfacing or seal coat until the surfacing or seal coat has been opened to public traffic for a period of not less than 7 days when hot melt bituminous adhesive is used, and not less than 14 days when epoxy adhesive is used.

In Section 85-1.06 in the 14th paragraph, replace the 2nd sentence with:

Cleaning shall be done by blast cleaning on all surfaces regardless of age or type, except that blast cleaning of clean, new hot mix asphalt and clean, new seal coat surfaces will not be required when hot melt bituminous adhesive is used.

THIS PAGE LEFT BLANK INTENTIONALLY

SECTION 12.

ENVIRONMENTAL PERMIT SUMMARY FORM



SAN LUIS OBISPO COUNTY
DEPARTMENT OF PUBLIC WORKS

Paavo Ogren, Director

County Government Center, Room 207 • San Luis Obispo CA 93408 • (805) 781-5252

Fax (805) 781-1229

email address: pwd@co.slo.ca.us

ENVIRONMENTAL PERMIT SUMMARY FORM

Date: October 1, 2012

To: Genaro Diaz, P.E., Project Manager

From: Mark Hutchinson, Environmental Programs Manager 

Subject: **Environmental Review & Permit Status for the Vineyard Drive Bike Lanes Project; ED01-649 (300437)**

Project Description: Widen a portion of Vineyard Drive to provide two twelve foot travel lanes and minimum five foot bike lanes in each direction and provide a ten foot shoulder for 120 ft on westbound Vineyard Drive at Bethel Road.

The environmental review and regulatory permit processes for the above referenced project are complete. The following is a summary of the environmental requirements for the project:

Permit	Status	Attachments?
CEQA Review	Categorically Exempt – June 3, 2002	X
NEPA Review	Not applicable, no federal permits or funding	
Coastal Permit	Not applicable, not in coastal zone	
CZMA	Not applicable, no federal action	
CDFG 1601	Not applicable	
USACOE 404	Not applicable	
NMFS ESA	Not applicable	
USFWS ESA	Not applicable, no listed species effects	
RWQCB 401	Not applicable	
NPDES	Not applicable if less than 1 acre disturbance	

ATTACHMENT A
POTHOLING INFORMATION

CONSTRUCTION LEGEND

-  REMOVE EXIST PAVEMENT
-  NEW PAVEMENT
-  AGGREGATE BASE
-  SAWCUT PAVEMENT
-  FILL LINE
-  CUT LINE
-  DITCH FLOWLINE
-  CONSTRUCT PER DETAIL 4, SHEET 8

NOTES

1. THE SAWCUT SHALL BE LOCATED AT LEAST 1" FROM EXISTING ETW STRIPE SUCH THAT IT IS REMOVED WITH THE SAWCUT OPERATION. AS A RESULT, THE DISTANCE FROM SAWCUT TO THE EXISTING EDGE OF PAVEMENT WILL VARY.
2. ALL DRIVEWAY PROFILES PER SHEETS 6 & 7. THE CONTRACTOR SHALL MAINTAIN DRIVEWAY ACCESS DURING CONSTRUCTION.
3. RELOCATE/PROTECT EXISTING SIGNS PER PAVEMENT DELINEATION AND SIGNAGE PLAN, SHEETS 9 TO 11.
4. TRIM TREES AS DIRECTED BY THE ENGINEER AT THE TIME OF CONSTRUCTION PER SLO CO STD DETAIL M-5d
5. PROTECT TREES IN PLACE AS DIRECTED BY THE ENGINEER AT THE TIME OF CONSTRUCTION PER SLO CO STD DETAIL M-5b.
6. RESET MAILBOX AS DIRECTED BY THE ENGINEER.

****UTILITY WARNING****

EXISTING UNDERGROUND UTILITIES SHOWN HEREON ARE SCHEMATIC AND APPROXIMATED FROM UTILITY ATLAS INFORMATION. VERIFY THE LOCATION OF EXISTING UTILITIES PRIOR TO CONSTRUCTION AND ALERT THE ENGINEER OF ANY POTENTIAL UTILITY CONFLICTS.

EXIST 4" PVC HIGH PRESSURE GAS LINE, ALONG SOUTH EDGE OF EXIST PAVEMENT, DEPTH VARIES.



EXIST OVERHEAD UTILITIES IN THIS AREA.

LOCATION AND DEPTH OF EXIST SUB-SURFACE STRUCTURES ARE NOT GUARANTEED. OTHER SUB-SURFACE STRUCTURES MAY OR MAY NOT EXIST.
DIG WITH CAUTION



DIAL TOLL FREE 8-1-1
AT LEAST TWO WORKING DAYS BEFORE YOU DIG
UNDERGROUND SERVICE ALERT OF SOUTHERN CALIFORNIA

ROAD NO.	JOB NO.	CALTRANS ID NO.	CALTRANS SHEET REF.	SHEET NO.	TOTAL SHEETS
5156	300437	BTA 1011-05-SLO-01	L-1	4	16
PROJECT ENGINEER		DATE			
REGISTERED CIVIL ENGINEER					
PLANS APPROVAL DATE					
NORTH COAST ENGINEERING, INC. 725 CRESTON ROAD, SUITE B PASO ROBLES, CA 93446			SAN LUIS OBISPO COUNTY PUBLIC WORKS COUNTY GOVERNMENT CENTER, #207 SAN LUIS OBISPO, CA 93408		

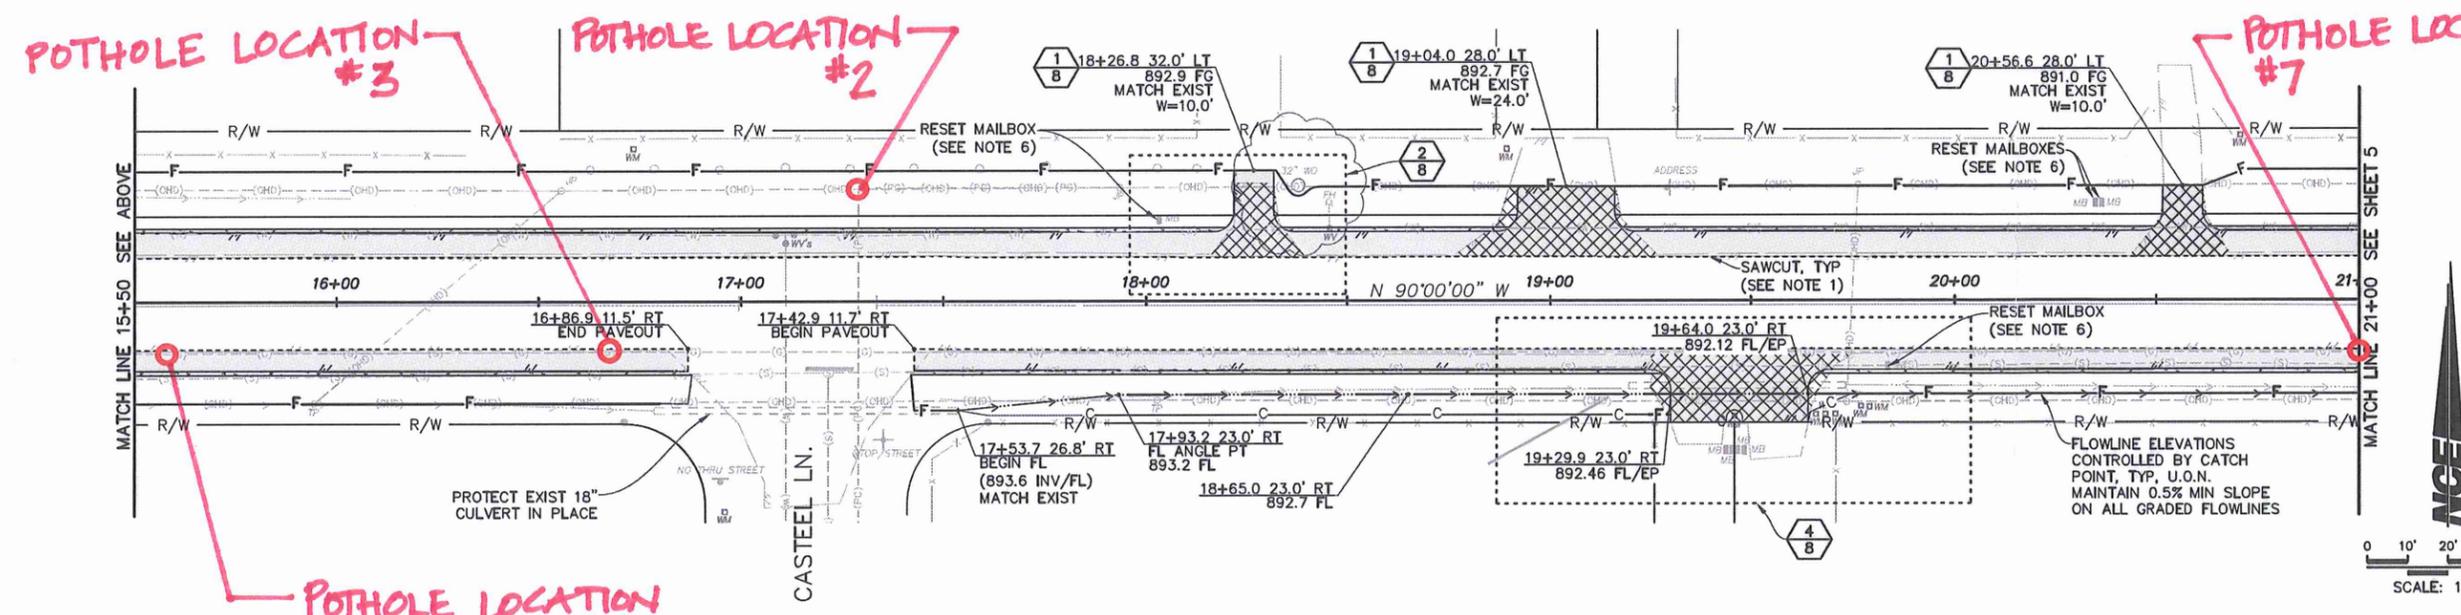
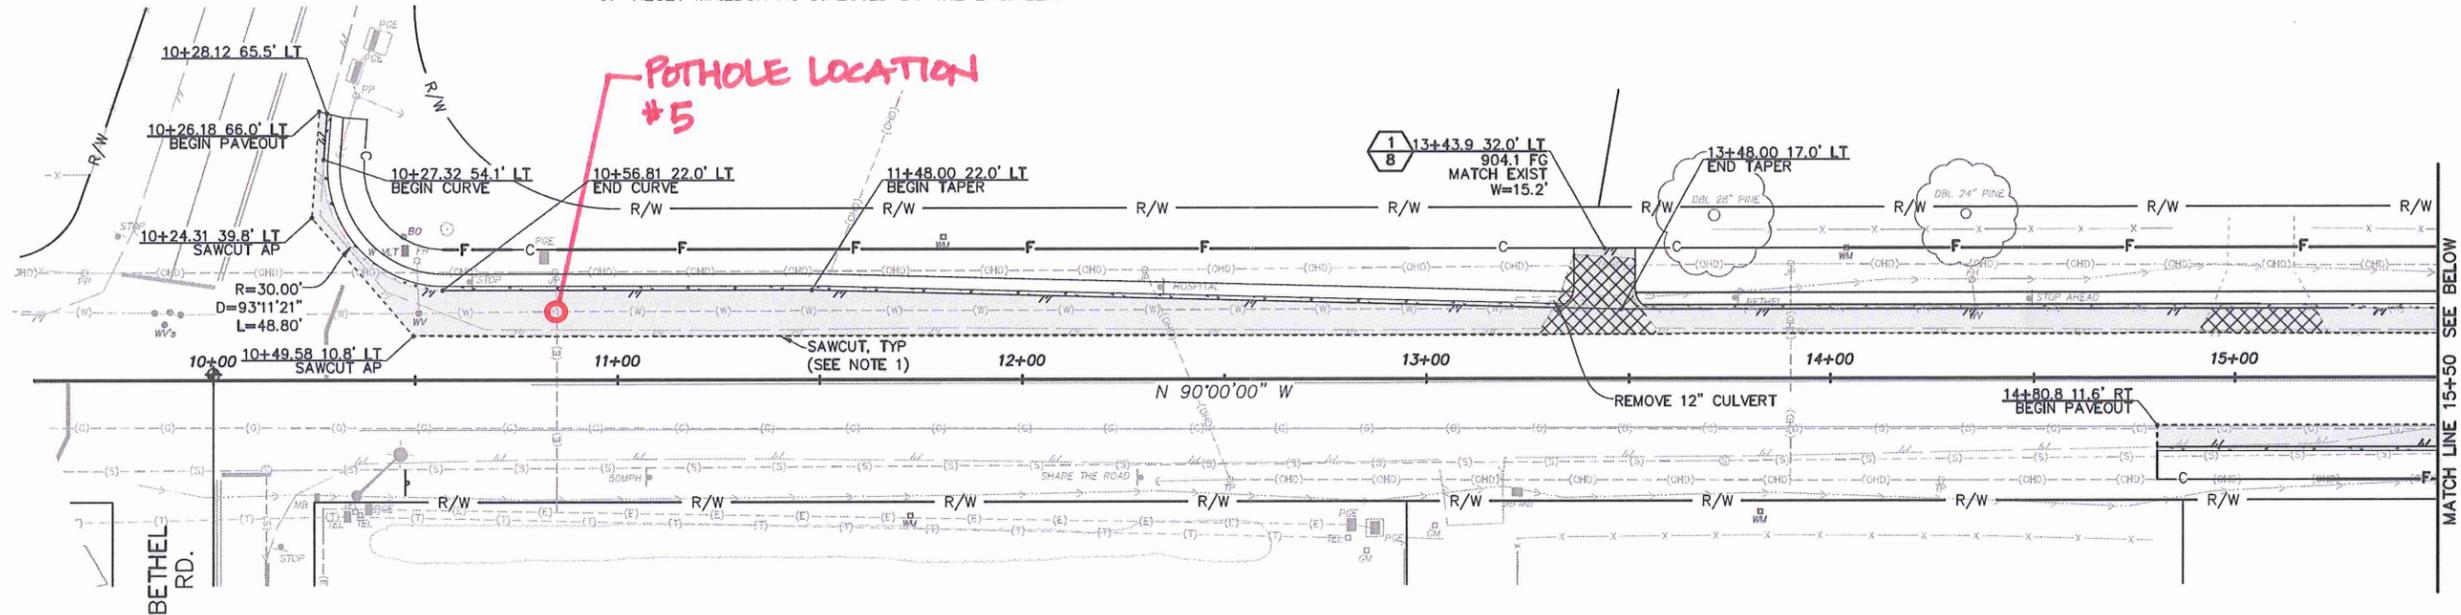


POTHOLE LOCATION #3

POTHOLE LOCATION #2

POTHOLE LOCATION #7

POTHOLE LOCATION #6



VINEYARD DRIVE BIKE LANES					
LAYOUT STA 9+50 TO 21+00					
TEMPLETON, CA					
Designer	Date	Drawn By	Date	Design Engineer	Date
CLB	9/24/2012	KSB	9/24/2012	CG	9/24/2012

CONSTRUCTION LEGEND

-  REMOVE EXIST PAVEMENT
-  NEW PAVEMENT
-  AGGREGATE BASE
-  SAWCUT PAVEMENT
-  FILL LINE
-  CUT LINE
-  DITCH FLOWLINE
-  CONSTRUCT PER DETAIL 4, SHEET 8

NOTES

1. THE SAWCUT SHALL BE LOCATED AT LEAST 1" FROM EXISTING ETW STRIPE SUCH THAT IT IS REMOVED WITH THE SAWCUT OPERATION. AS A RESULT, THE DISTANCE FROM SAWCUT TO THE EXISTING EDGE OF PAVEMENT WILL VARY.
2. ALL DRIVEWAY PROFILES PER SHEETS 6 & 7. THE CONTRACTOR SHALL MAINTAIN DRIVEWAY ACCESS DURING CONSTRUCTION.
3. RELOCATE/PROTECT EXISTING SIGNS PER PAVEMENT DELINEATION AND SIGNAGE PLAN, SHEETS 9 TO 11.
4. TRIM TREES AS DIRECTED BY THE ENGINEER AT THE TIME OF CONSTRUCTION PER SLO CO STD DETAIL M-5d
5. PROTECT TREES IN PLACE AS DIRECTED BY THE ENGINEER AT THE TIME OF CONSTRUCTION PER SLO CO STD DETAIL M-5b.
6. RESET MAILBOX AS DIRECTED BY THE ENGINEER.

****UTILITY WARNING****


EXISTING UNDERGROUND UTILITIES SHOWN HEREON ARE SCHEMATIC AND APPROXIMATED FROM UTILITY ATLAS INFORMATION. VERIFY THE LOCATION OF EXISTING UTILITIES PRIOR TO CONSTRUCTION AND ALERT THE ENGINEER OF ANY POTENTIAL UTILITY CONFLICTS.

EXIST 4" PVC HIGH PRESSURE GAS LINE, ALONG SOUTH EDGE OF EXIST PAVEMENT, DEPTH VARIES.

EXIST OVERHEAD UTILITIES IN THIS AREA.

LOCATION AND DEPTH OF EXIST SUB-SURFACE STRUCTURES ARE NOT GUARANTEED. OTHER SUB-SURFACE STRUCTURES MAY OR MAY NOT EXIST.

DIG WITH CAUTION



DIAL TOLL FREE 8-1-1 AT LEAST TWO WORKING DAYS BEFORE YOU DIG



UNDERGROUND SERVICE ALERT OF SOUTHERN CALIFORNIA

ROAD NO.	JOB NO.	CALTRANS ID NO.	CALTRANS SHEET REF.	SHEET NO.	TOTAL SHEETS
5156	300437	BTA 1011-05-SLO-01	L-2	5	16

PROJECT ENGINEER	DATE
REGISTERED CIVIL ENGINEER	

PLANS APPROVAL DATE

NORTH COAST ENGINEERING, INC. 725 CRESTON ROAD, SUITE B PASO ROBLES, CA 93446	SAN LUIS OBISPO COUNTY PUBLIC WORKS COUNTY GOVERNMENT CENTER, #207 SAN LUIS OBISPO, CA 93408
---	--

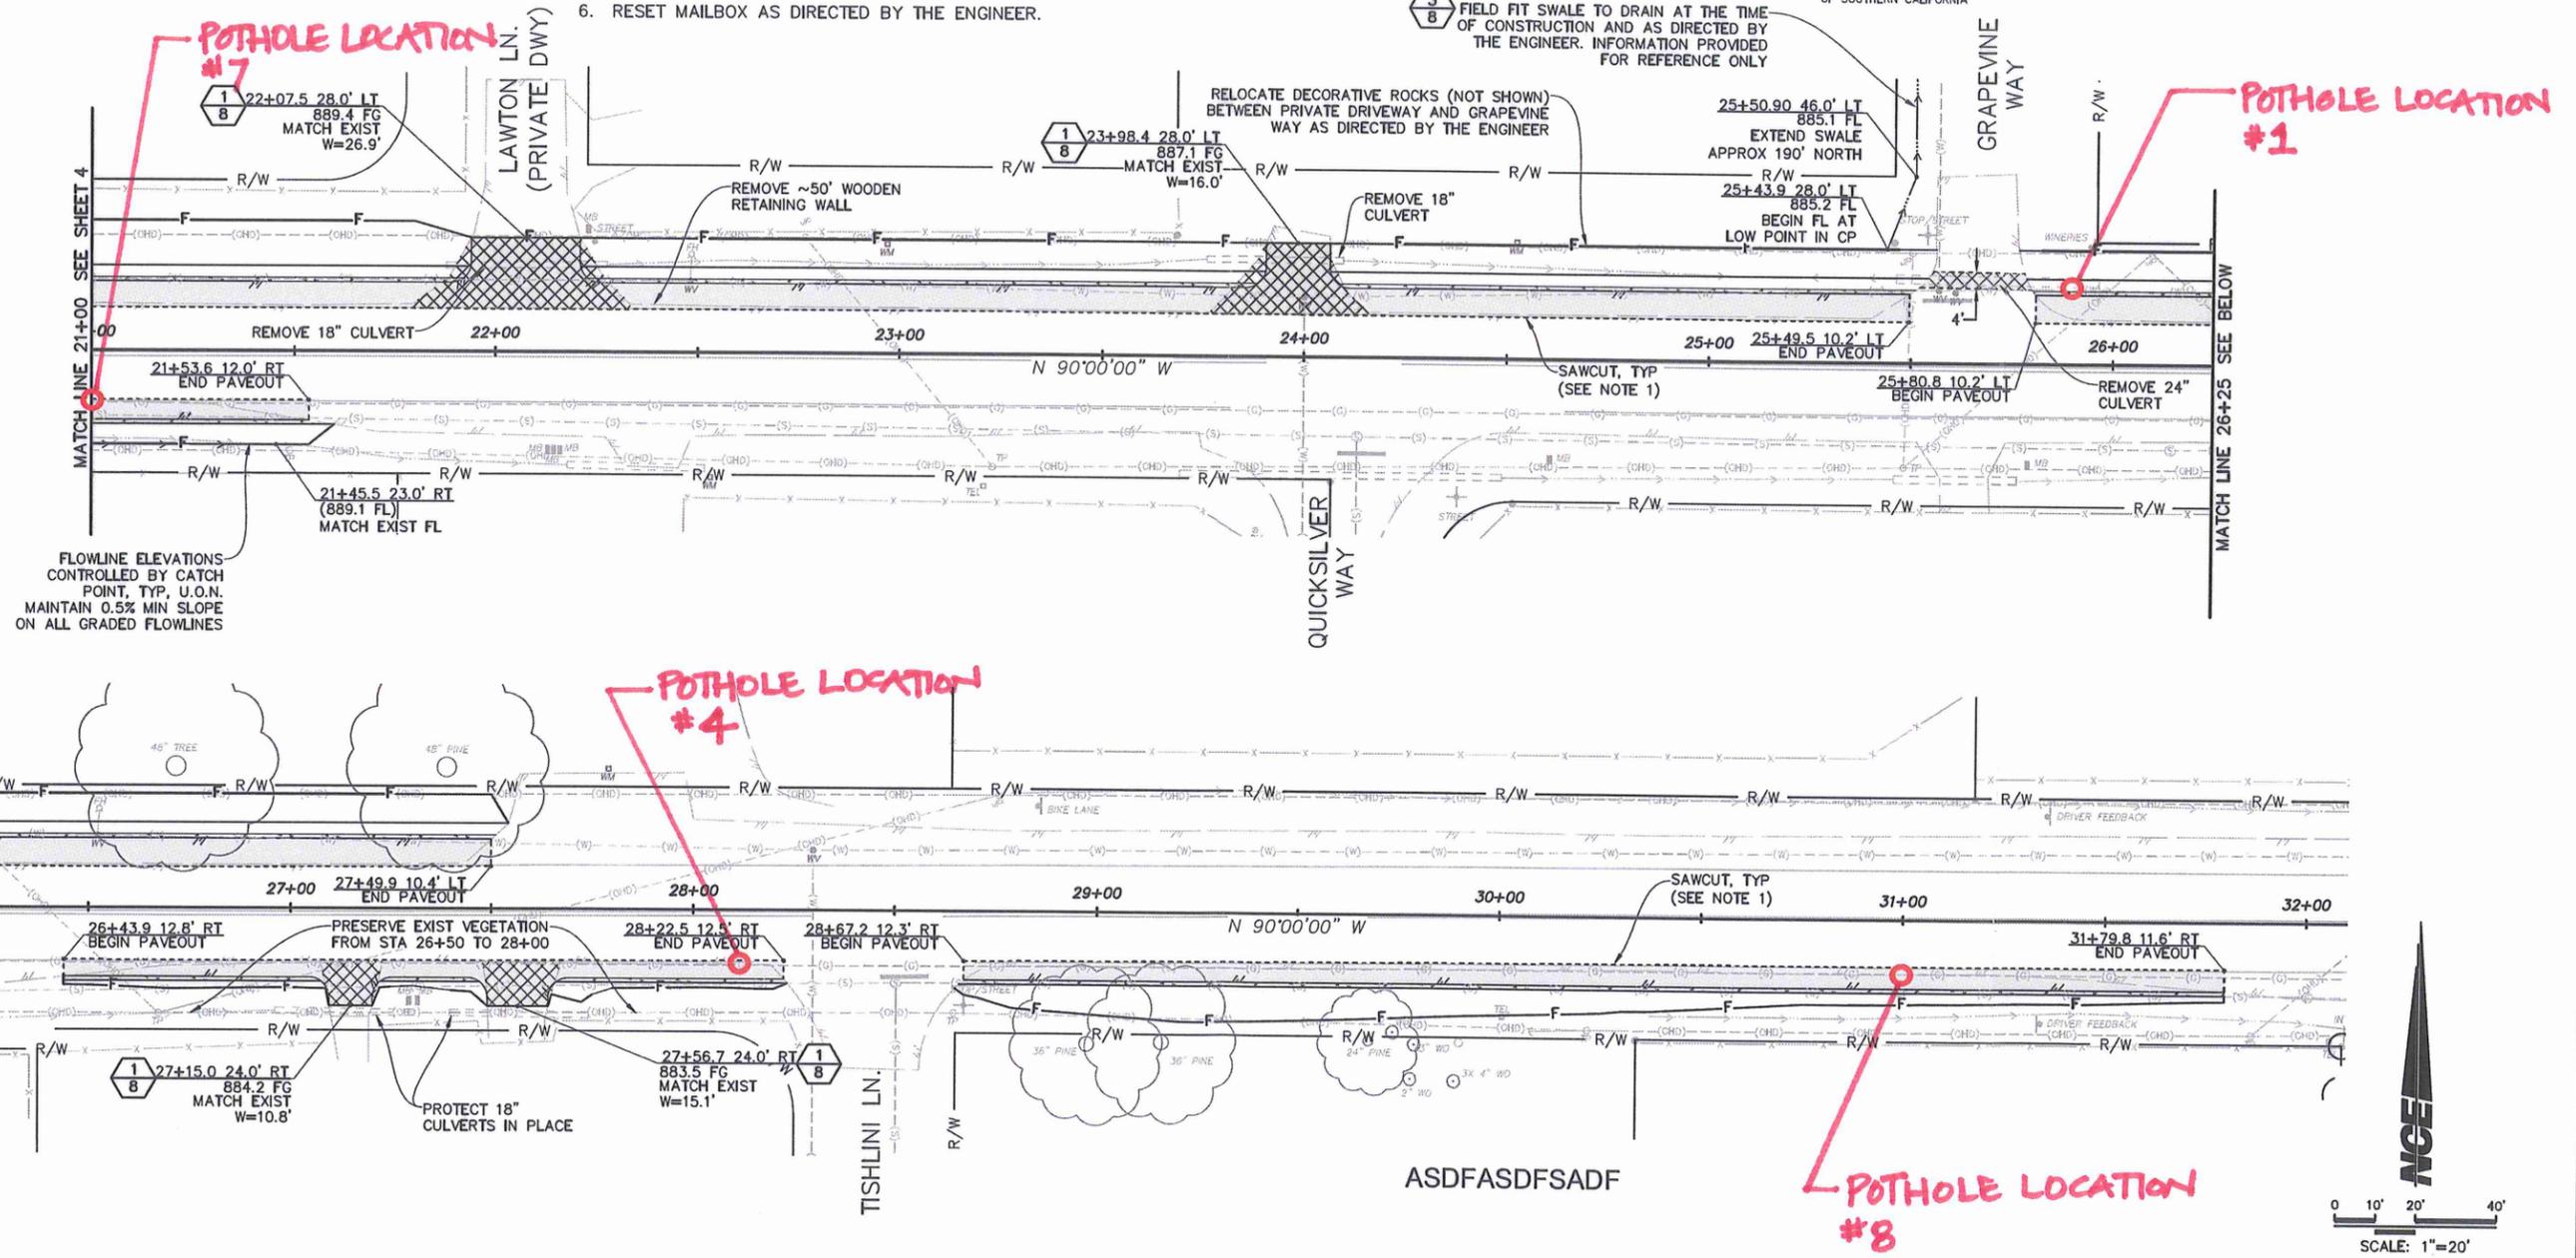

 FIELD FIT SWALE TO DRAIN AT THE TIME OF CONSTRUCTION AND AS DIRECTED BY THE ENGINEER. INFORMATION PROVIDED FOR REFERENCE ONLY

FLOWLINE ELEVATIONS CONTROLLED BY CATCH POINT, TYP, U.O.N. MAINTAIN 0.5% MIN SLOPE ON ALL GRADED FLOWLINES

VINEYARD DRIVE BIKE LANES					
LAYOUT STA 21+00 TO 32+00					
TEMPLETON, CA					
Designer	Date	Drawn By	Date	Design Engineer	Date
CLB	9/24/2012	KSB	9/24/2012	CG	9/24/2012

ORIGINAL SCALE IN INCHES FOR REDUCED PLANS



SLO COUNTY PUBLIC WORKS POTHOLING FORM


Project No.: 300437

Project Name: Vineyard Bikelanes


Observed by: Diana Matula

Physical Location <u>North side of Vineyard near Vineyard/Grapevine</u>	Pothole No. <u>1</u>
	Date <u>9/18/12</u>
	Utility Company <u>TCS</u>

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	 Draw North Arrow
---------------------------	---	---

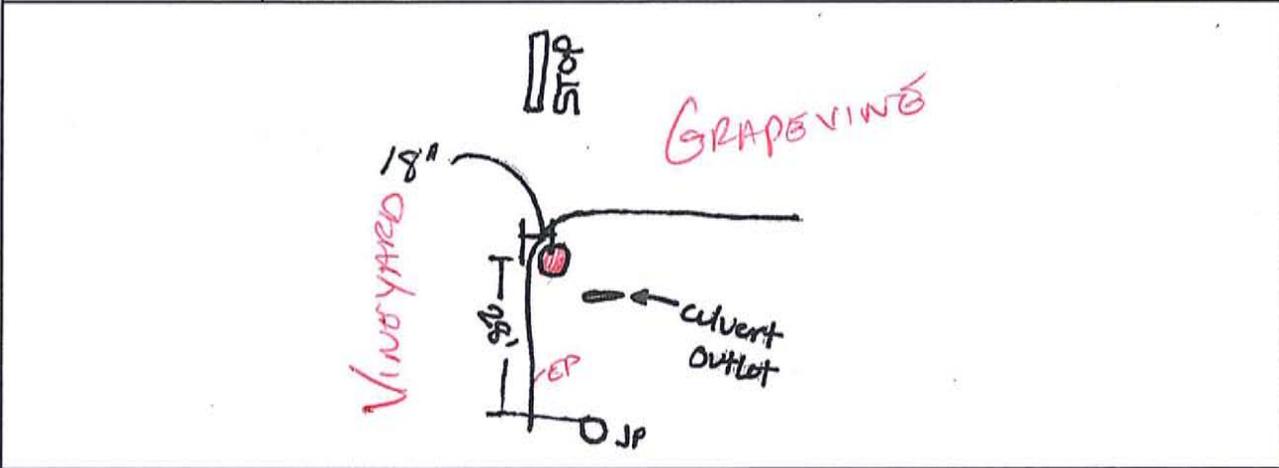

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type <u>n/a</u>
		Pavement Thickness <u>n/a</u>

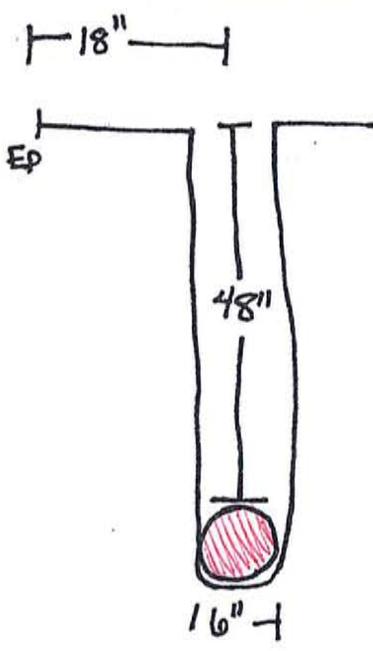	Utility Type <u>Water</u>
	Utility Material:
	Utility Size/Width <u>6"</u>
	Depth to Utility Top <u>48"</u>
	Depth to Utility Bottom <u>54"</u>

Notes
Utility found in the shoulder area.

Hole located approx 28 feet west of junction pole on west side of Grapevine



SLO COUNTY PUBLIC WORKS POTHOLING FORM


Project No.: 300437

Project Name: Vineyard Bikelanes


Observed by: Diana Matula

Physical Location North side of Vineyard Dr across from Casteel Dr	Pothole No. <u>2</u>
	Date <u>9/18/12</u>
	Utility Company <u>Water, PG&E, Charter</u>

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	 Draw North Arrow
---------------------------	---	---

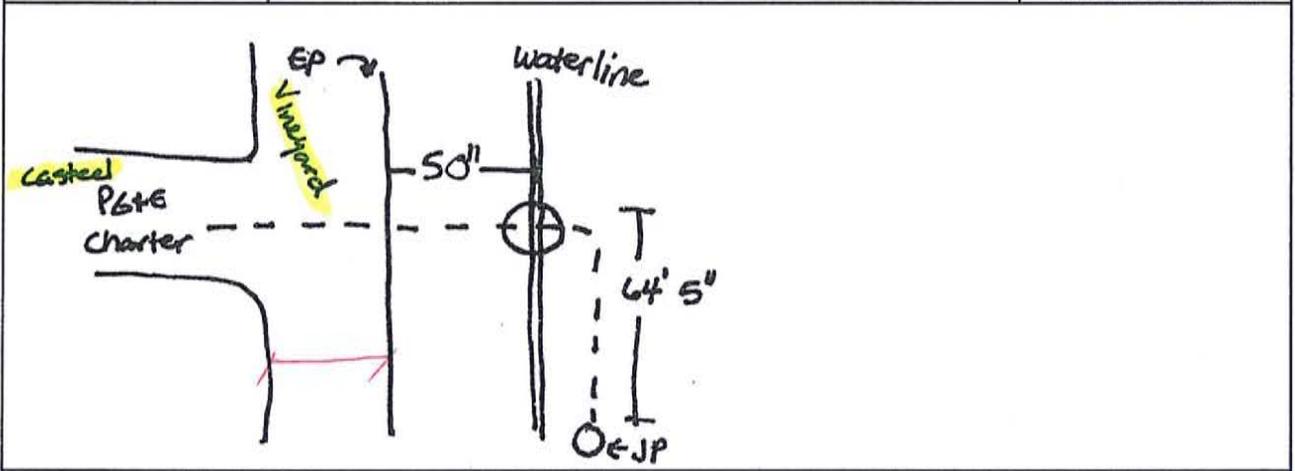

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type
		Pavement Thickness

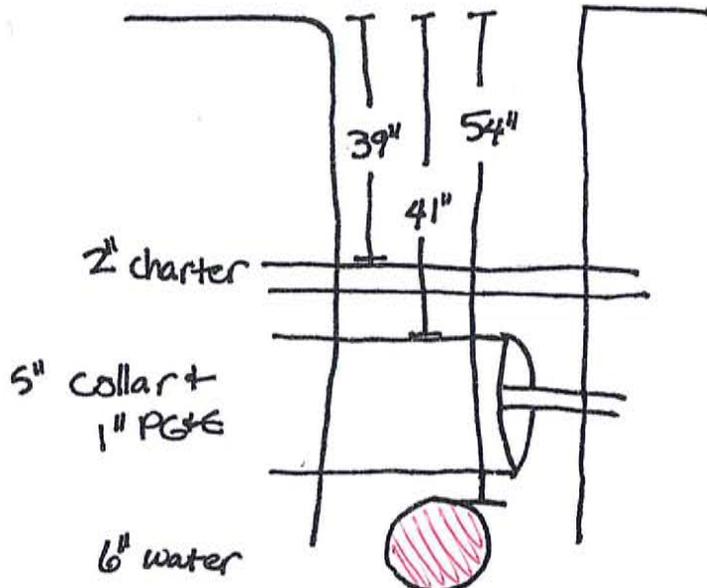	Utility Type <u>WATER / CHARTER / PG&E</u>
	Utility Material:
	Utility Size/Width
	Depth to Utility Top
	Depth to Utility Bottom
	Notes All utilities Found in the shoulder area Depths: 39" → cable TV 41" → PG&E collar 54" → water



SLO COUNTY PUBLIC WORKS POTHOLING FORM


Project No.: 300437

Project Name: Vineyard Bikelanes


Observed by: Diana Matula

Physical Location <u>South side of Vineyard</u> <u>Intersection of Vineyard / Casteel</u>	Pothole No. <u>3</u>
	Date <u>9/18/12</u>
	Utility Company <u>So cal Gas</u>

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	 Draw North Arrow
---------------------------	---	---

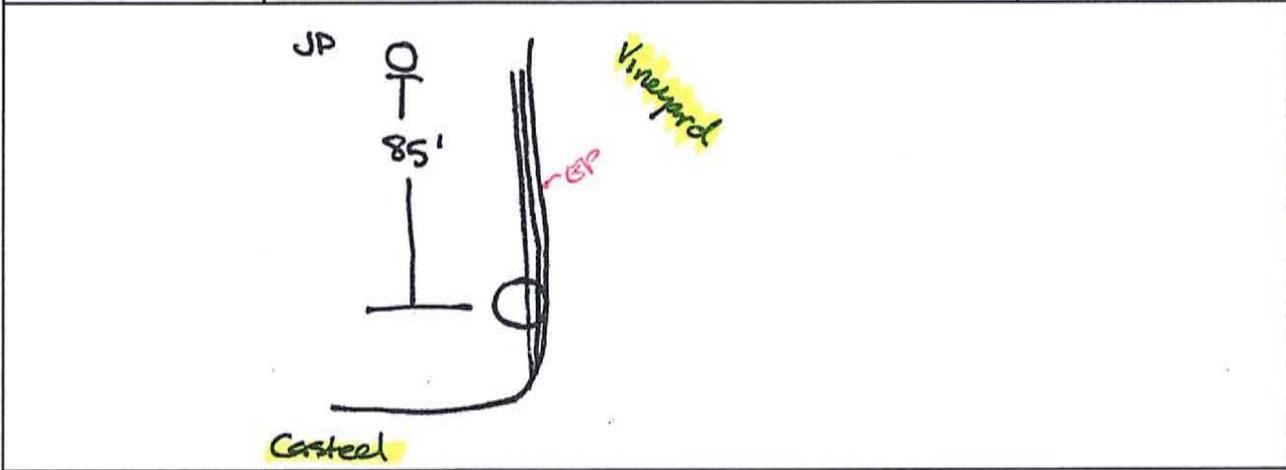

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type <u>asphalt</u>
		Pavement Thickness <u>4"</u>

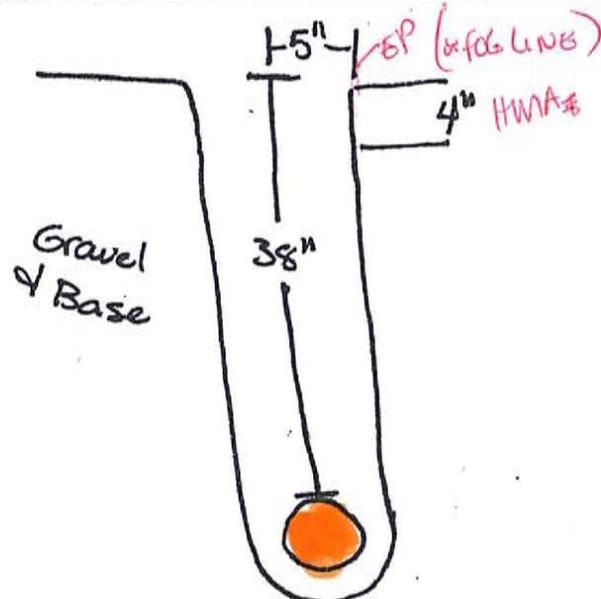

Utility Type	<u>Gas</u>
Utility Material:	<u>PVC</u>
Utility Size/Width	<u>4"</u>
Depth to Utility Top	<u>38"</u>
Depth to Utility Bottom	<u>42"</u>
Notes	<u>Utility found in shoulder, very close to edge of pavement</u>




SLO COUNTY PUBLIC WORKS POTHOLING FORM

Project No.: 300437
 Project Name: Vineyard Bikelanes
 Observed by: Diana Matula

Physical Location <u>South Side of Vineyard Dr</u> <u>Intersection of Vineyard/Tishlini</u>	Pothole No. <u>4</u>
	Date <u>9/98/12</u>
	Utility Company <u>So Cal Gas</u>

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	→ Draw North Arrow
---------------------------	---	-----------------------

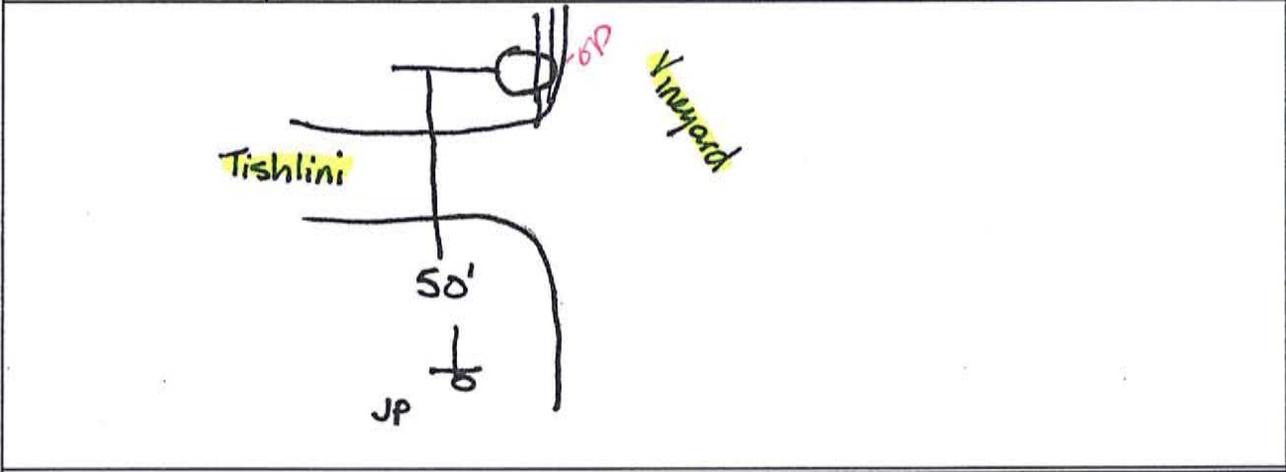

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type <u>asphalt</u>
		Pavement Thickness <u>4"</u>

	Utility Type <u>gas</u>
	Utility Material: <u>PVC</u>
	Utility Size/Width <u>4"</u>
	Depth to Utility Top <u>42"</u>
	Depth to Utility Bottom <u>46"</u>
Notes <u>Utility found in shoulder very close to existing edge of pavement</u>	



SLO COUNTY PUBLIC WORKS POTHOLING FORM


Project No.: 300437

Project Name: Vineyard Bikeways


Observed by: Diana Matula

Physical Location Vineyard Dr, Templeton Sta 10+80	Pothole No. 5
	Date 10/4/12
	Utility Company Water, PG&E, AT&T

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	↑ Draw North Arrow
---------------------------	---	-----------------------

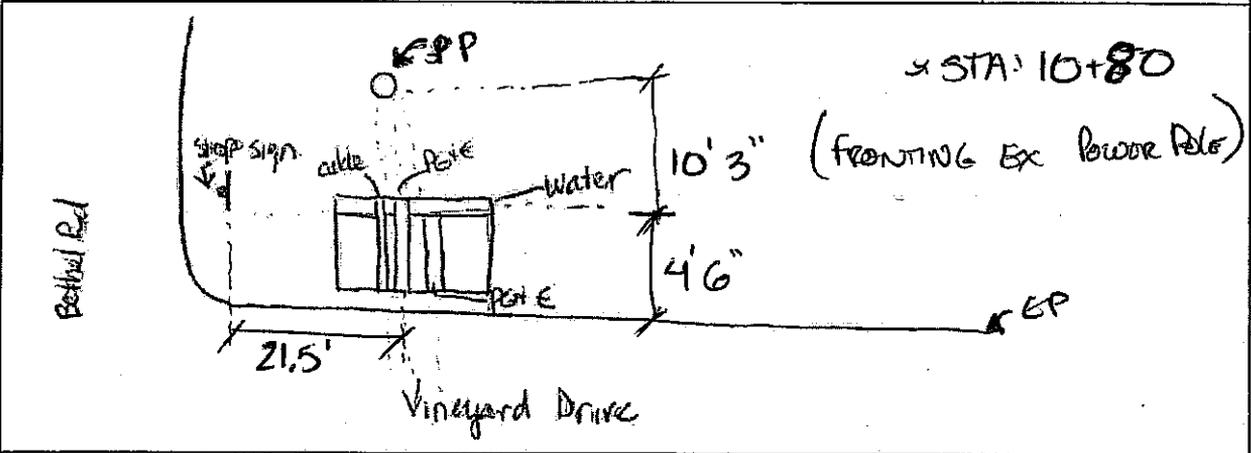

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type asphalt
		Pavement Thickness 4"

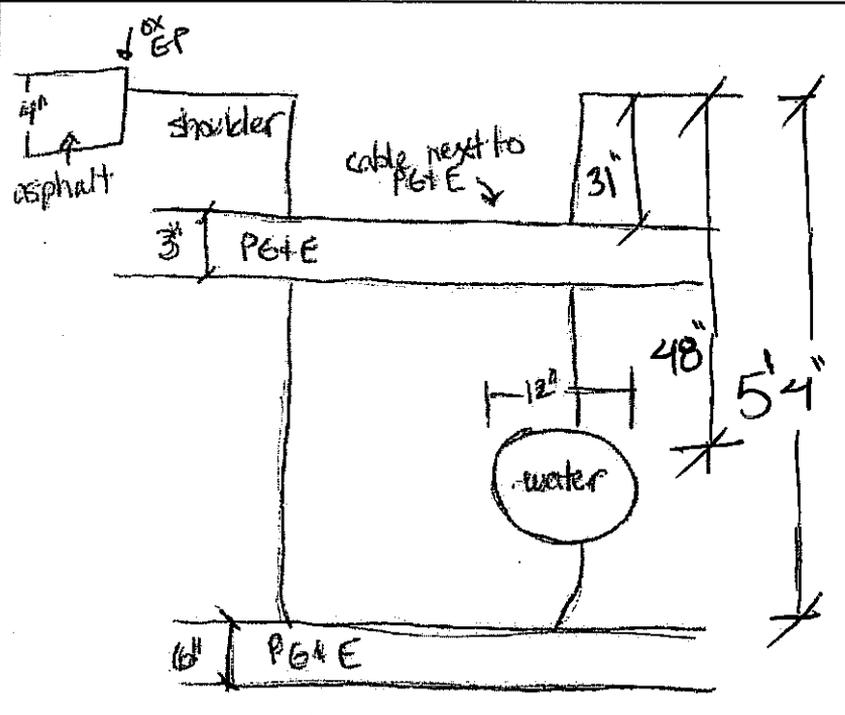

Utility Type see below
Utility Material:
Utility Size/Width
Depth to Utility Top
Depth to Utility Bottom
Notes Water is 12" ACP PG&E upper = 3" conduit PG&E lower = 6" conduit Cable = 1" conduit View is looking toward Bethel Rd



SLO COUNTY PUBLIC WORKS POTHOLING FORM


Project No.: 300437

Project Name: Vineyard Bikeways


Observed by: Benard Diaz / Diana Matuia

Physical Location <u>165' west of curb Vineyard Dr, Templeton Sta 15+60</u>	Pothole No. <u>6</u>
	Date <u>10/1/12</u>
	Utility Company <u>The Gas Co</u>

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	↑ Draw North Arrow
---------------------------	---	-----------------------

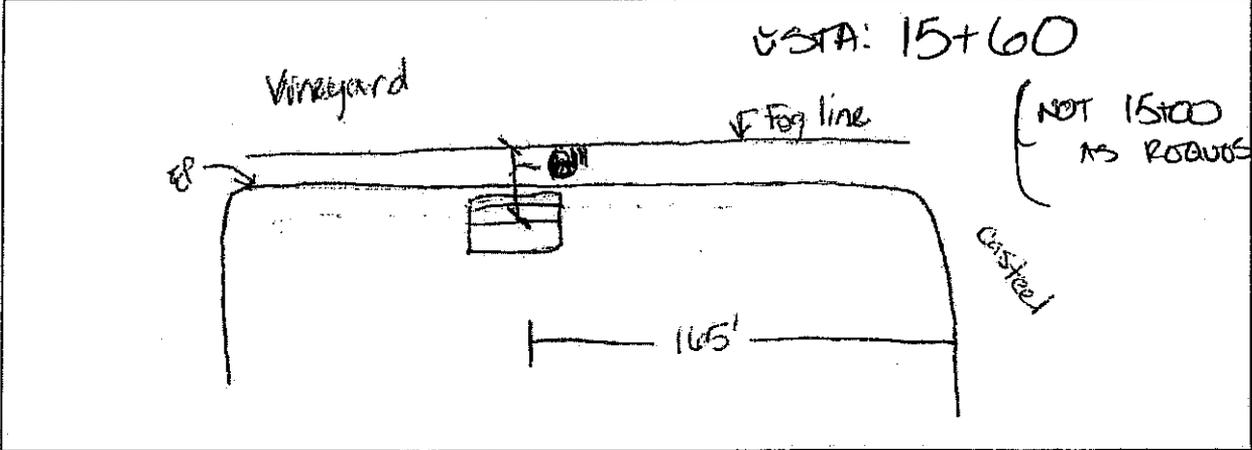

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type <u>asphalt</u>
-------------------	--	------------------------------

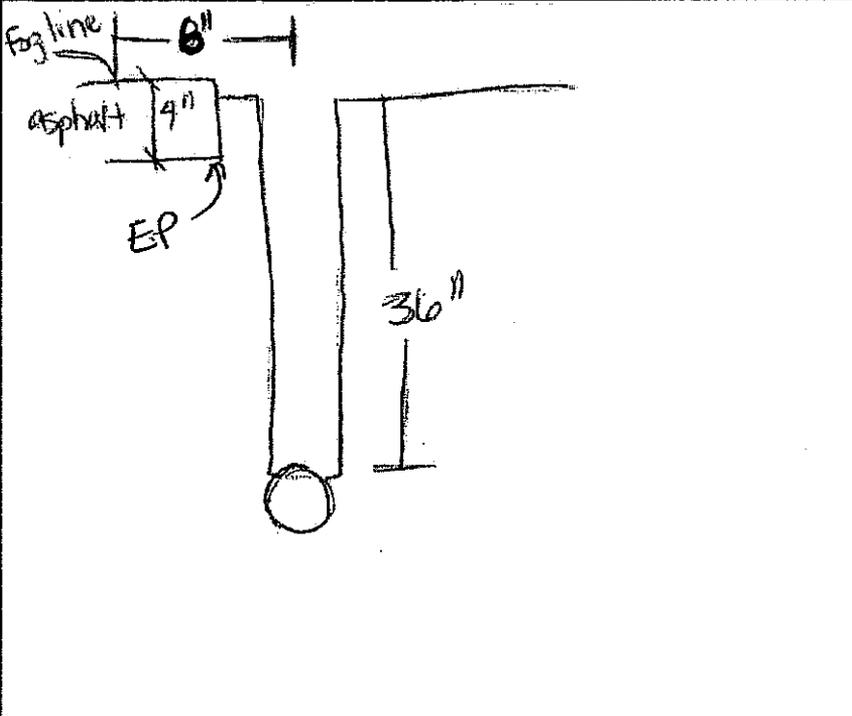

Pavement Thickness	<u>4"</u>
Utility Type	<u>gas</u>
Utility Material:	<u>PVC</u>
Utility Size/Width	<u>4"</u>
Depth to Utility Top	<u>36"</u>
Depth to Utility Bottom	<u>40"</u>

Notes
center of pipe is
8" off center
of fog line
at sta 15+60



SLO COUNTY PUBLIC WORKS POTHOLING FORM


Project No.: 300437

Project Name: Vineyard Bikelines


Observed by: Enaro Diaz / Diana Matula

Physical Location <u>Sta 21+00</u> <u>Vineyard Dr Templeton</u>	Pothole No. <u>#7</u>
	Date <u>10/4/12</u>
	Utility Company <u>The Gas Co</u>

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	↑
		Draw North Arrow

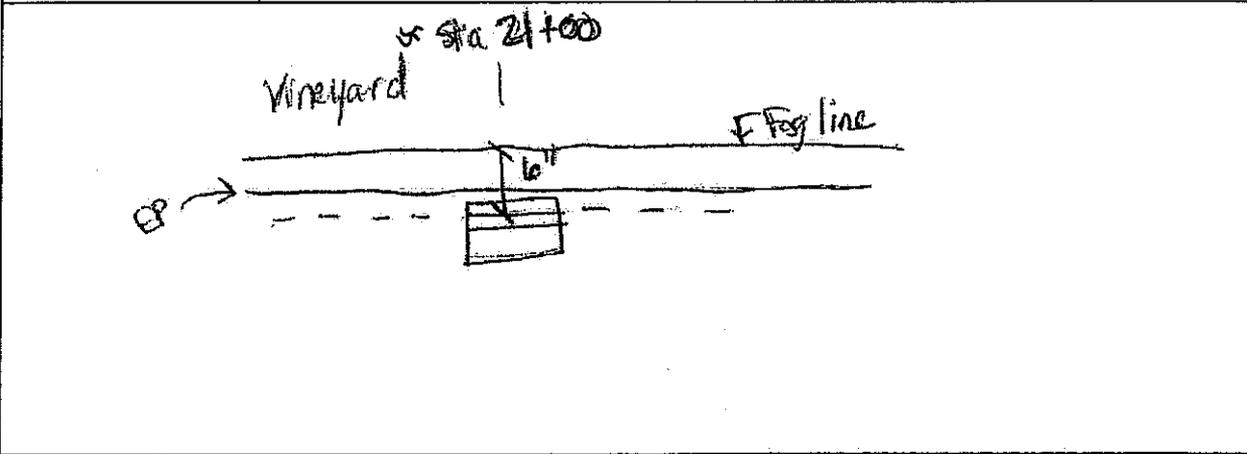

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type <u>asphalt</u>
		Pavement Thickness <u>4"</u>

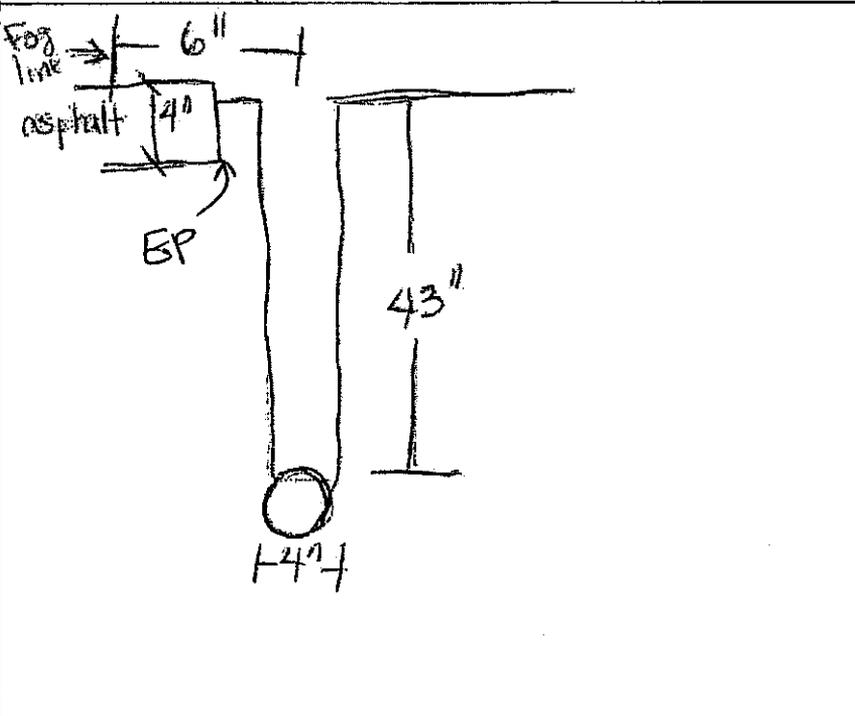

Utility Type <u>gas</u>
Utility Material: <u>PVC</u>
Utility Size/Width <u>4"</u>
Depth to Utility Top <u>43"</u>
Depth to Utility Bottom <u>47"</u>

Notes
 center of pipe is 6" off the center of the fog line at sta 21+00



SLO COUNTY PUBLIC WORKS POTHOLING FORM


Project No.: 300437

Project Name: Vineyard Bikelane S


Observed by: Genaro Diaz / Diana Matula

Physical Location Vineyard Dr Templeton STA: 31+00	Pothole No. #8
	Date 10/4/12
	Utility Company The Gas Co

Horizontal Location (NTS)	Include offset measurements to reference landmarks (eg. edge of pavement, edge of curb, fire hydrant), Sta/Offset from CL or Coordinates (if available)	↑ Draw North Arrow
---------------------------	---	-----------------------

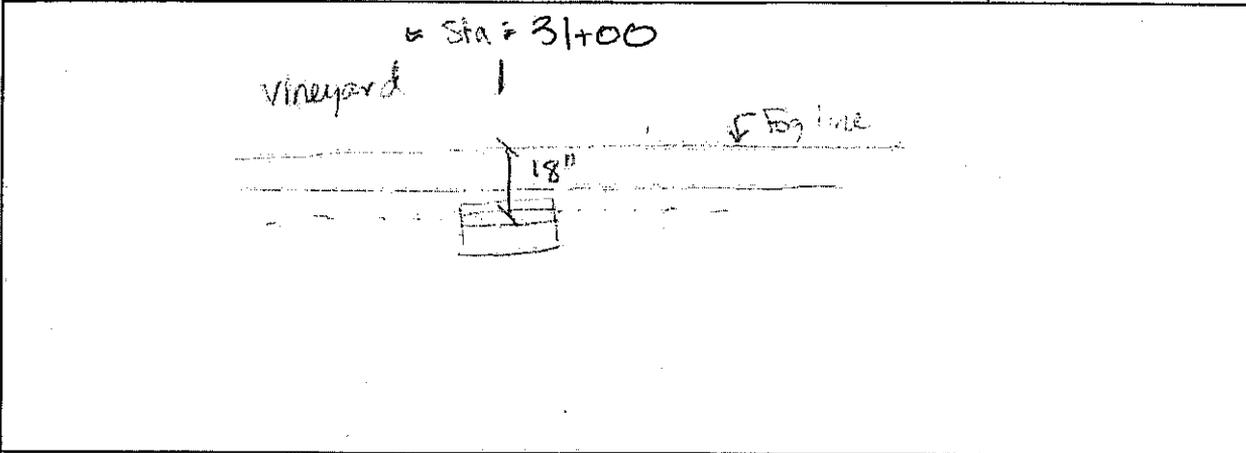

Vertical Location	Attach pictures of the identified utility/utilities, of the measurement tapes/rods, of utility direction (N,S,E,W, angle) relative to EP, CL, etc.	Pavement Type asphalt
		Pavement Thickness 4"

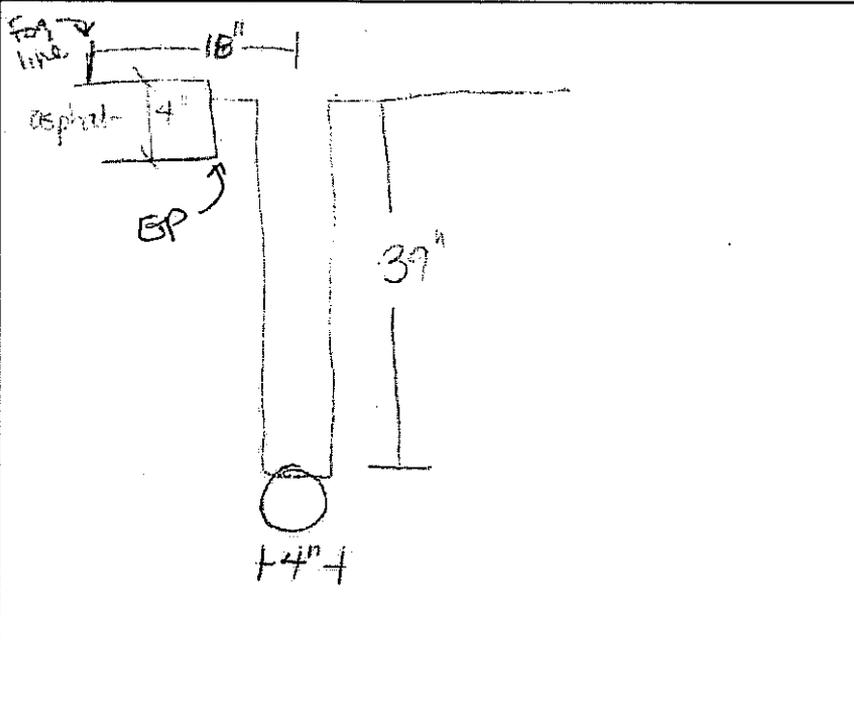

Utility Type gas
Utility Material: PVC
Utility Size/Width 4"
Depth to Utility Top 39"
Depth to Utility Bottom 43"

Notes
center of pipe is 18" off the center of the fog line at Sta

ATTACHMENT B
THE GAS COMPANY LETTER



A  Sempra Energy™ company

October 10, 2012

San Luis Obispo County
Department of Public Works
County Government Center, Room 207
Attn: Diana Matula
San Luis Obispo, CA 93408

Southern California
Gas Company

1171 More Road
Goleta, CA

Mailing Address:
P. O. Box 818
Goleta, CA
93116-0818
ML9360

Subject: Vineyard Bike Lanes, Contract #300437

Dear Diana Matula,

In response to a request by the County of San Luis Obispo, I am providing some written direction to protect our Gas Company facilities within the construction area described in the above contract.

We are requesting that the contractor cut only the minimum depth required to install the base and paving over our facilities, so that our facilities retain no less than 20" of undisturbed cover during construction. We also request of that our facilities be potholed every approximately 100' to verify consistent depth is maintained, and that no heavy vibrating compaction equipment is used over our facilities until some base material has been applied. The loads applied over our facilities during construction should not exceed a maximum pressure of 5,000 lb/sq ft. If any loads do exceed this value, it will be necessary to contact us 3 business days in advance with all the details of the equipment, including max load and contact area. If the information provided is not complete, additional time will be required.

Please let me know if you have any questions about any of this.

Sincerely,


A handwritten signature in purple ink that reads "Vagn Pedersen".

Vagn Pedersen
The Gas Company
Goleta Planning
(805) 681-8048


ATTACHMENT C

CONCEPTUAL WATER POLLUTION CONTROL PLANS

ROAD NO.	JOB NO.	CALTRANS ID NO.	CALTRANS SHT ID NO.	SHEET NO.	TOTAL SHEETS
5156	300437	BTA 1011-05-SLO-01	WPC-1	FOR REFERENCE	
PROJECT ENGINEER		DATE			
REGISTERED CIVIL ENGINEER					
PLANS APPROVAL DATE					
NORTH COAST ENGINEERING, INC. 725 CRESTON ROAD, SUITE B PASO ROBLES, CA 93446			SAN LUIS OBISPO COUNTY PUBLIC WORKS COUNTY GOVERNMENT CENTER, #207 SAN LUIS OBISPO, CA 93408		

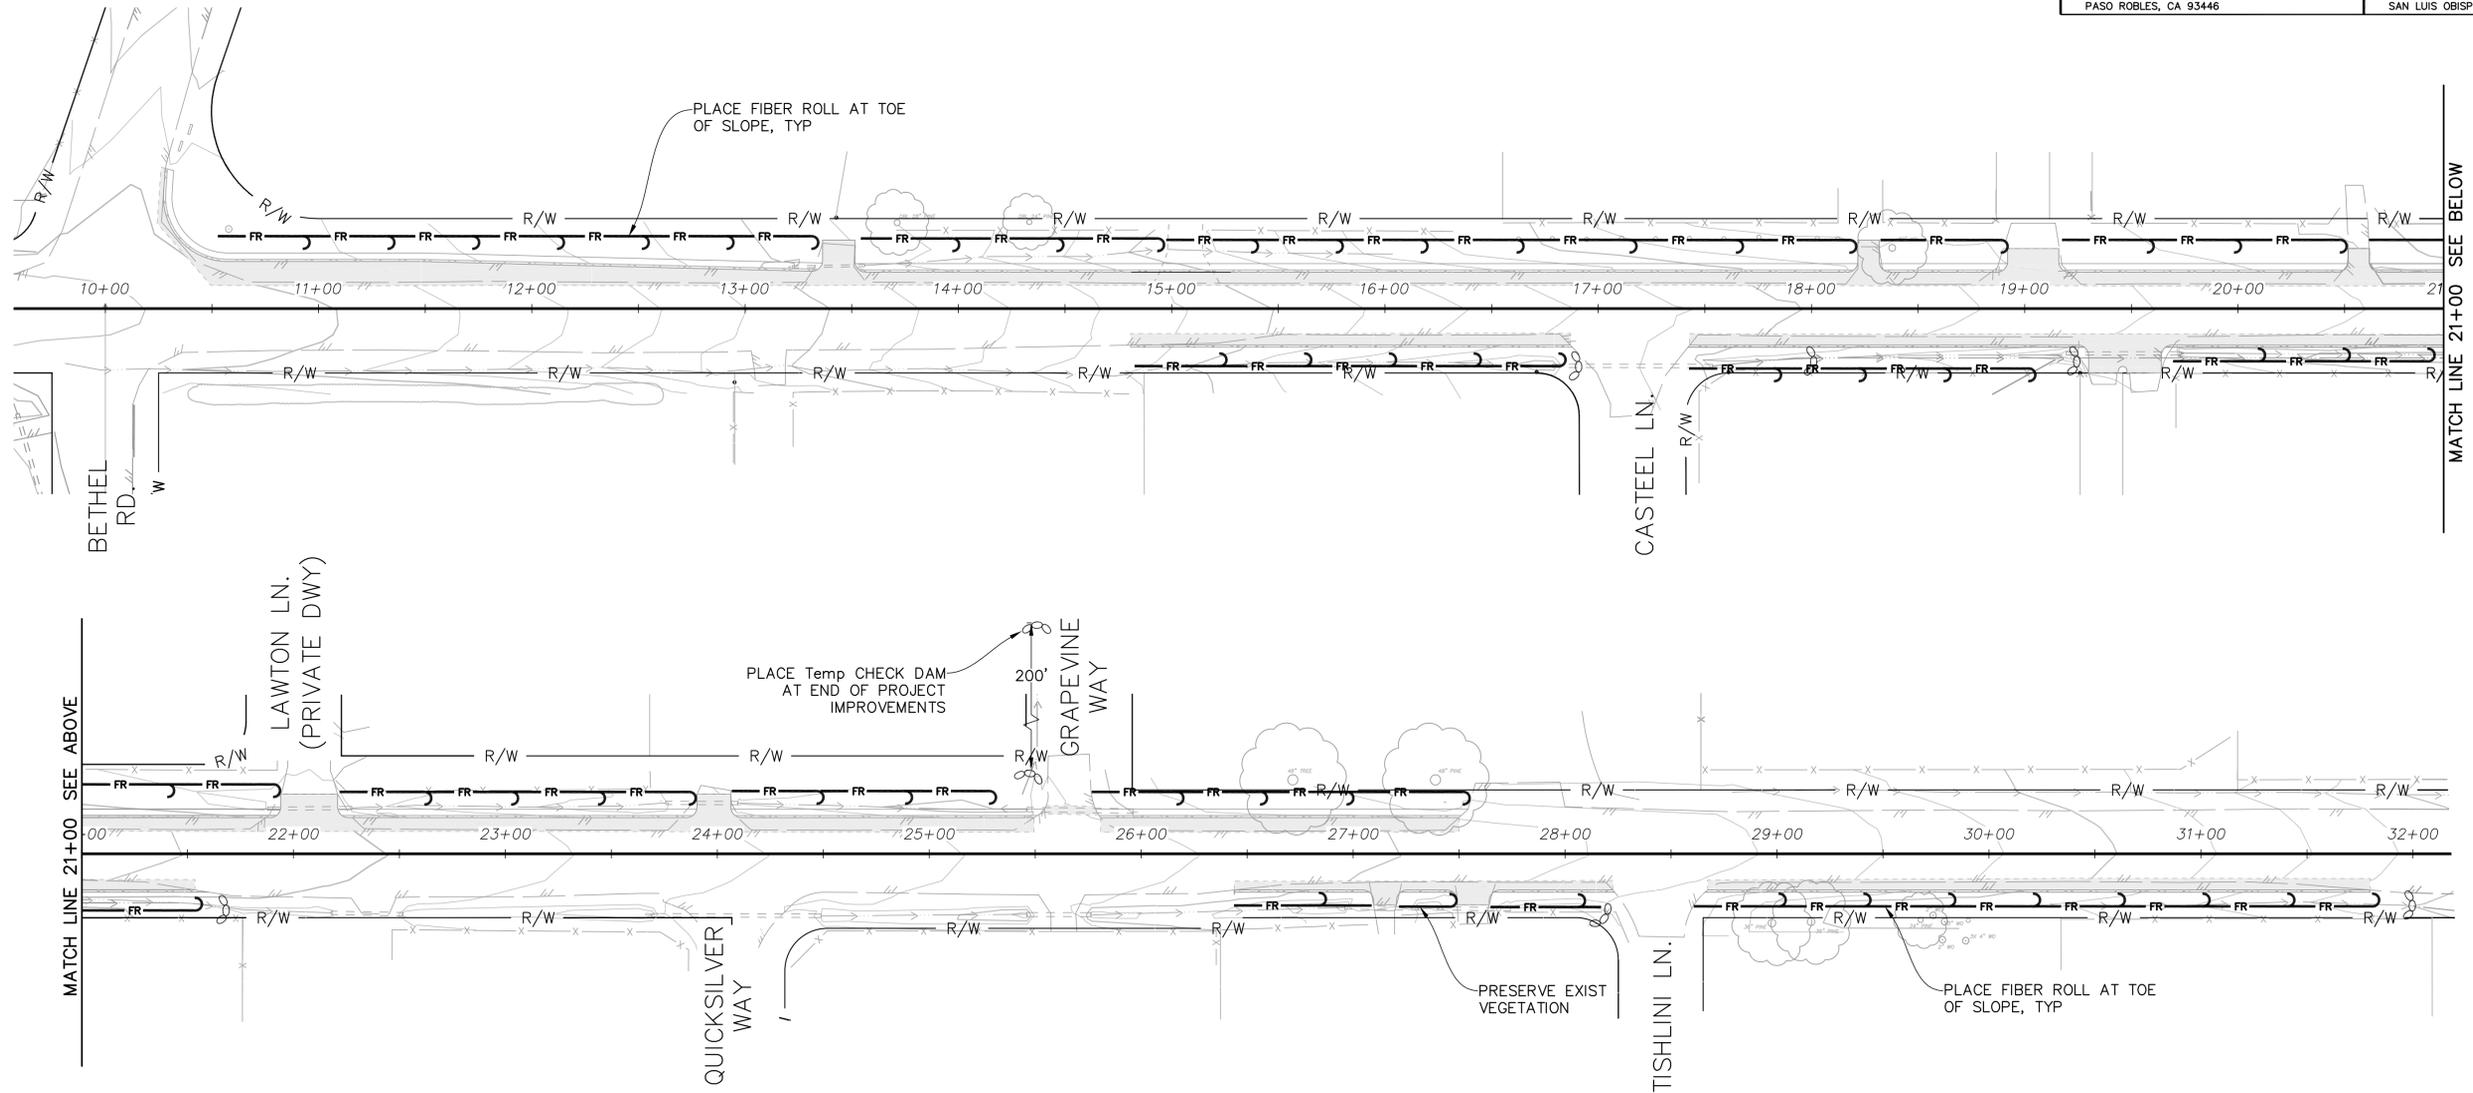

LEGEND


-  FIBER ROLL PER DETAIL 5, SHEET WPCD-1
-  FIBER ROLL SEDIMENT TRAP PER DETAIL 6, SHEET WPCD-1
-  Temp CHECK DAM, TYPE 2 PER DETAIL 8, SHEET WPCD-1




0 1 2 3
ORIGINAL SCALE IN INCHES FOR REDUCED PLANS

VINEYARD DRIVE BIKE LANES					
TEMPORARY WATER POLLUTION CONTROL					
TEMPLETON, CA					
Designer	Date	Drawn By	Date	Design Engineer	Date
CLB	9/21/2012	KSB	9/21/2012	CG	9/21/2012


ROAD NO.	JOB NO.	CALTRANS ID NO.	CALTRANS SHT ID NO.	SHEET NO.	TOTAL SHEETS
5156	300437	BTA 1011-05-SLO-01	WPCD-1	FOR REFERENCE	
PROJECT ENGINEER		DATE			
REGISTERED CIVIL ENGINEER					
PLANS APPROVAL DATE					
NORTH COAST ENGINEERING, INC. 725 CRESTON ROAD, SUITE B PASO ROBLES, CA 93446			SAN LUIS OBISPO COUNTY PUBLIC WORKS COUNTY GOVERNMENT CENTER, #207 SAN LUIS OBISPO, CA 93408		

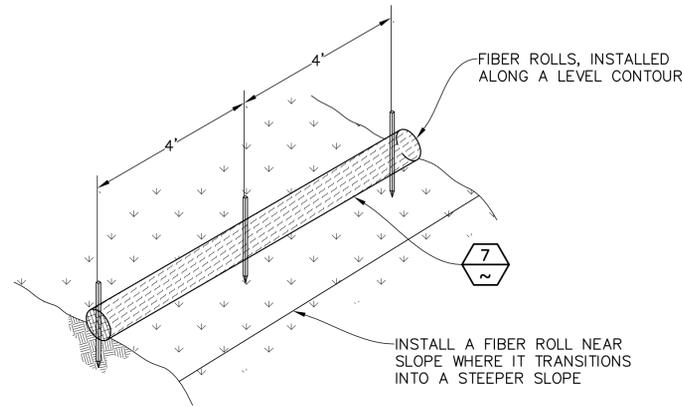


5 FIBER ROLL INSTALLATION
NTS



7 FIBER ROLL ENTRENCHMENT
NTS

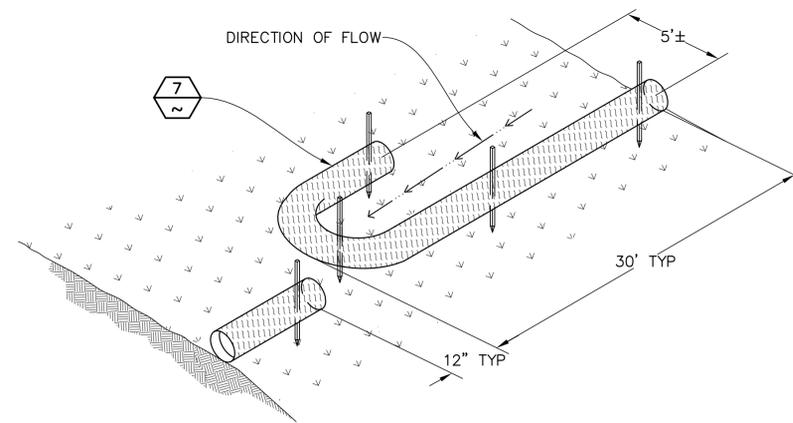

6 FIBER ROLL SEDIMENT TRAP
NTS

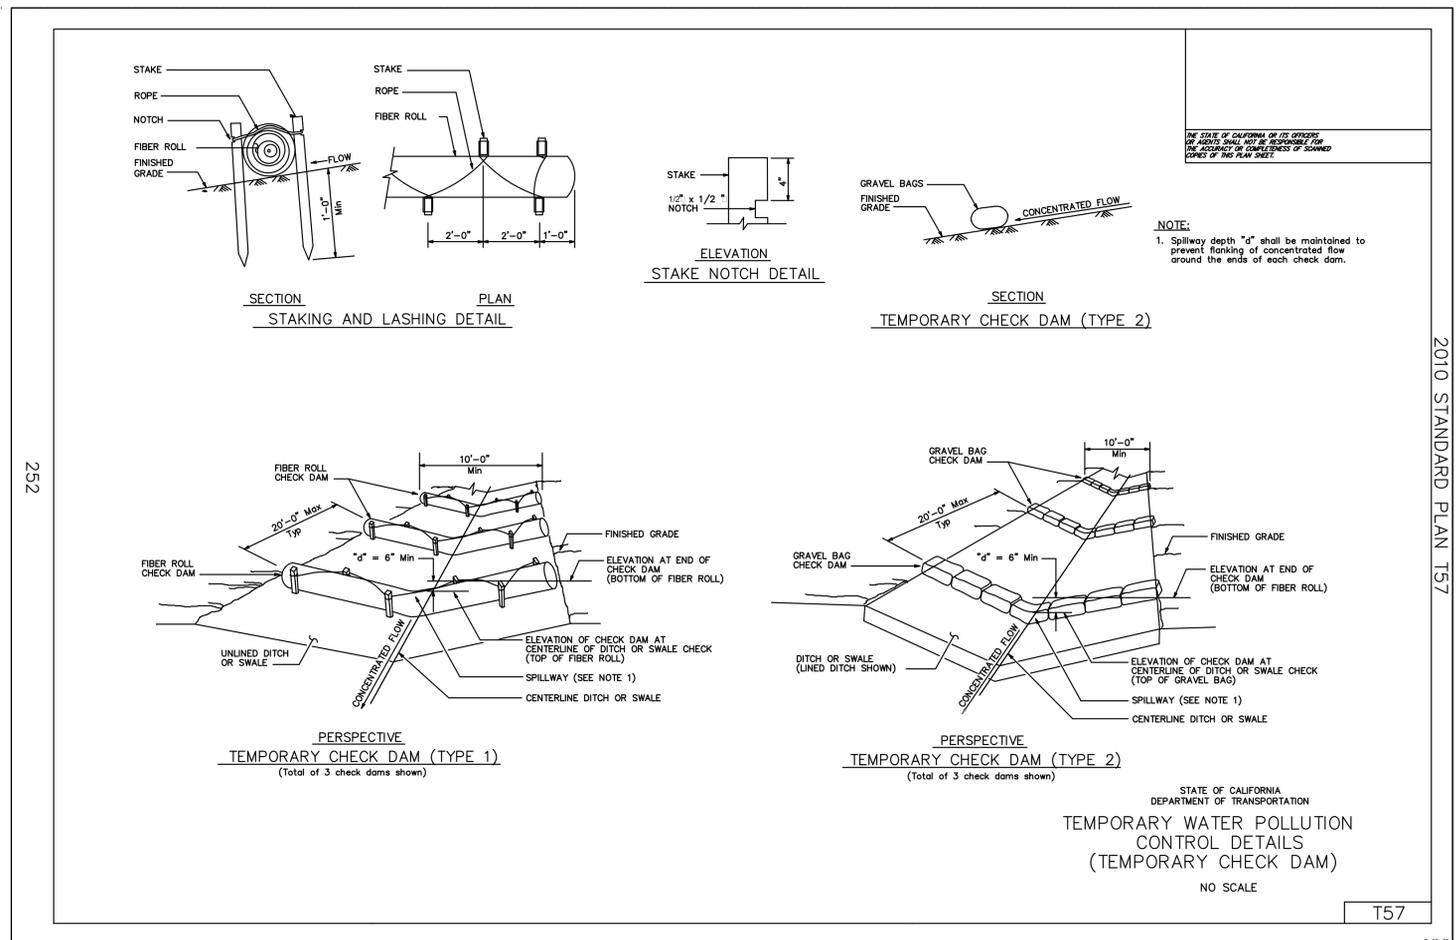

8 Temp CHECK DAM
NTS


STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION					
VINEYARD DRIVE BIKE LANES					
TEMPORARY WATER POLLUTION CONTROL DETAILS					
TEMPLETON, CA					
Designer	Date	Drawn By	Date	Design Engineer	Date
CLB	9/21/2012	KSB	9/21/2012	CG	9/21/2012

0 1 2 3
ORIGINAL SCALE IN INCHES FOR REDUCED PLANS

2010 STANDARD PLAN T57

T57

ROAD NO.	JOB NO.	CALTRANS ID NO.	CALTRANS SHT ID NO.	SHEET NO.	TOTAL SHEETS
5156	300437	BTA 1011-05-SLO-01	EC-1	FOR REFERENCE	
PROJECT ENGINEER _____ DATE _____ REGISTERED CIVIL ENGINEER					
PLANS APPROVAL DATE _____					
NORTH COAST ENGINEERING, INC. 725 ORESTON ROAD, SUITE B PASO ROBLES, CA 93446			SAN LUIS OBISPO COUNTY PUBLIC WORKS COUNTY GOVERNMENT CENTER, #207 SAN LUIS OBISPO, CA 93408		

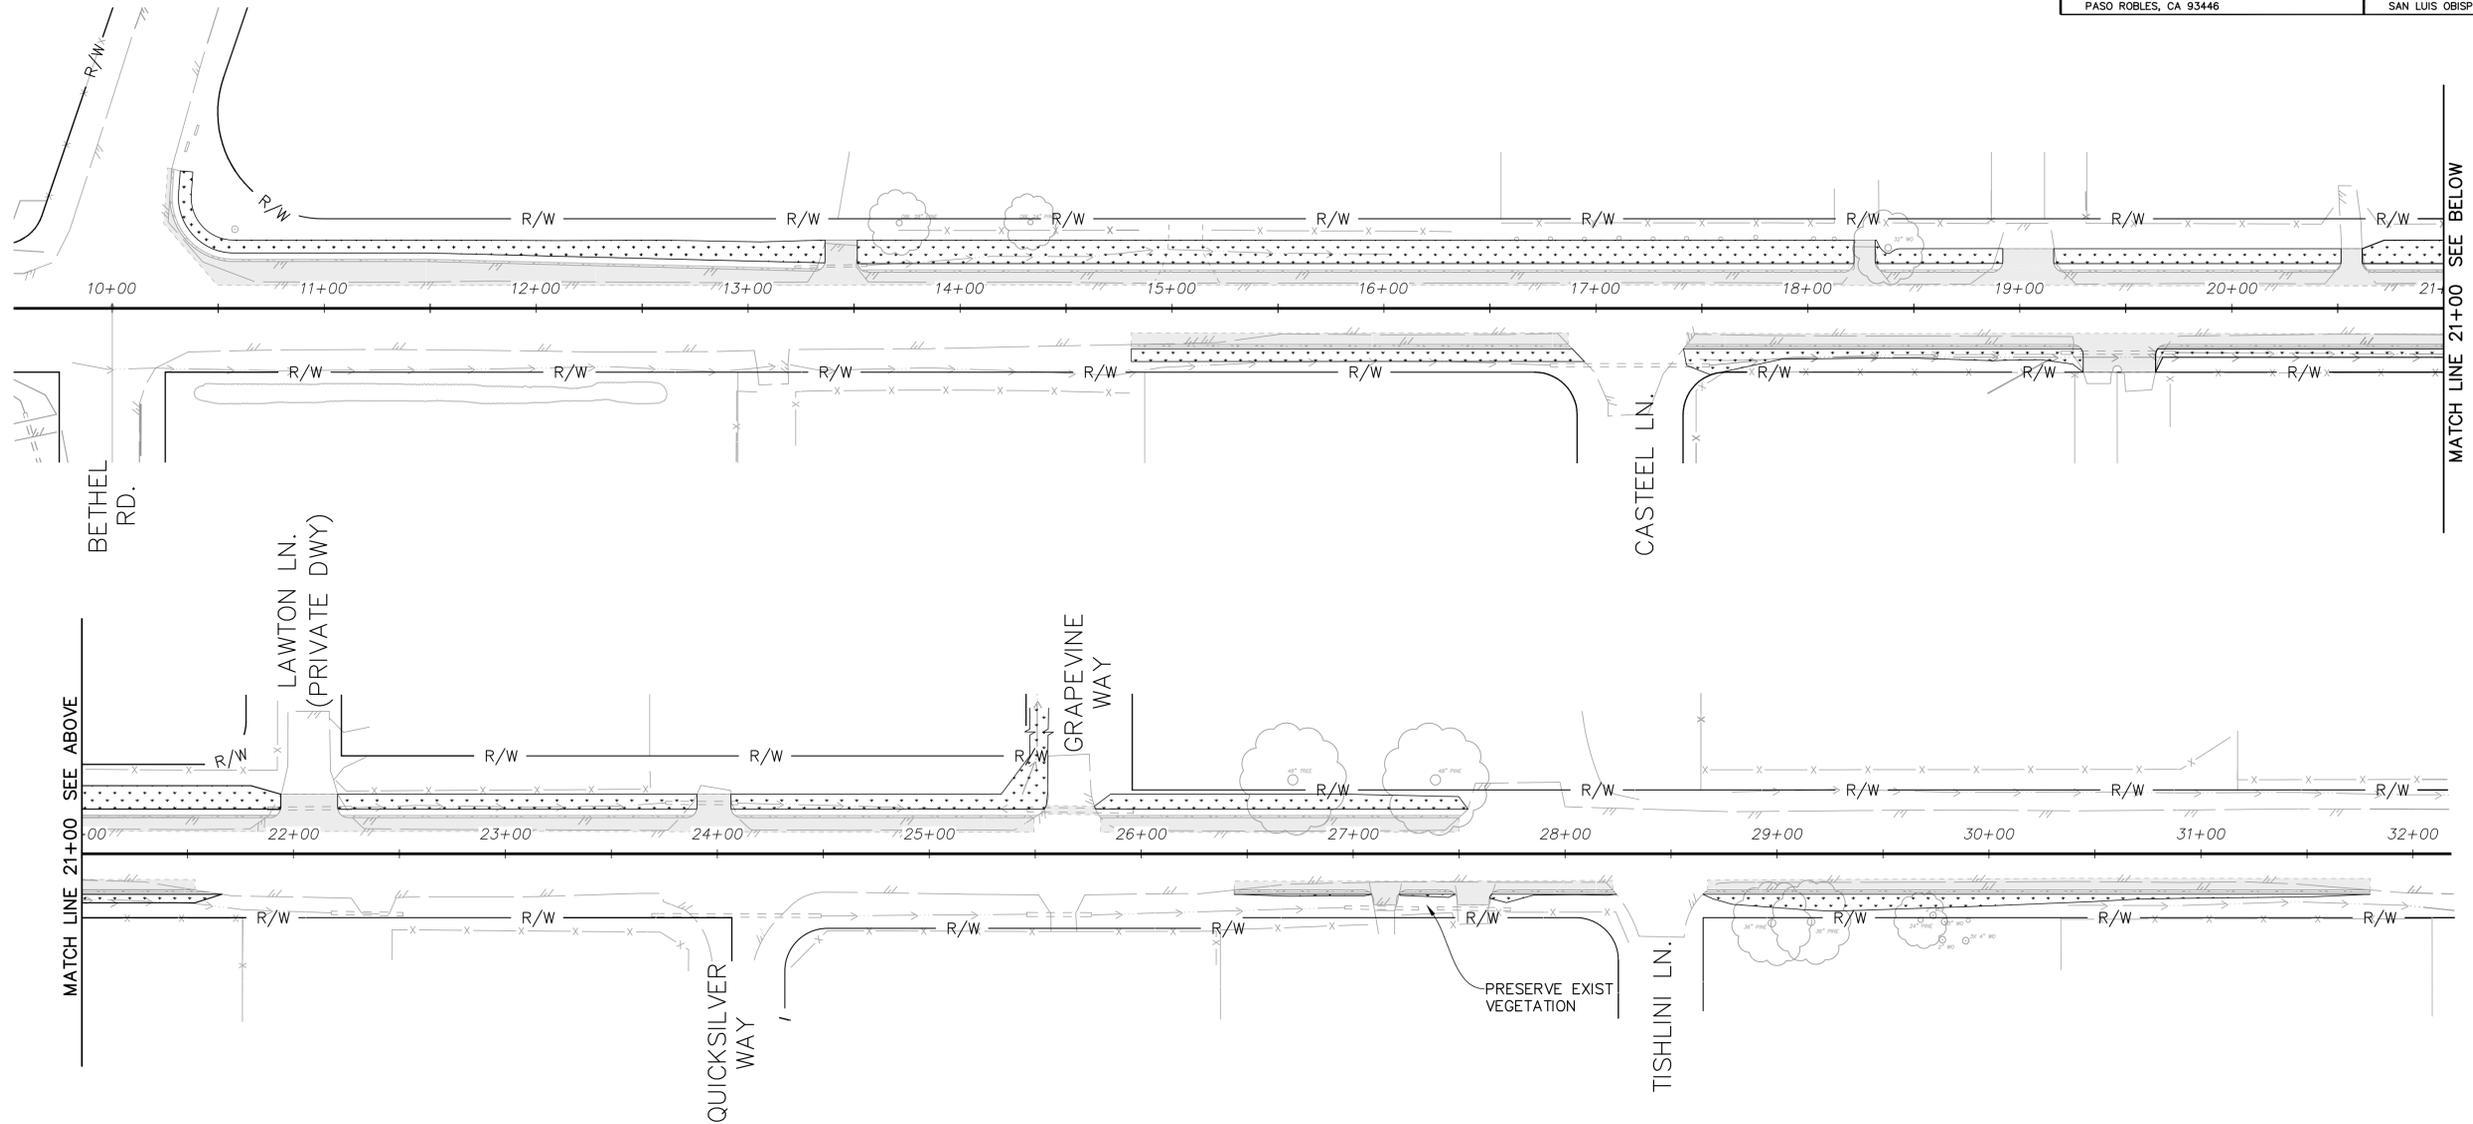


LEGEND

	EROSION CONTROL (HYDROSEED) WITH STRAW
--	--

NOTES

1. EROSION CONTROL (HYDROSEED) WITH STRAW SHALL BE REQUIRED AT ANY DISTURBED AREAS, INCLUDING THE CONSTRUCTION STAGING AREA, NOT SHOWN. LOCATION OF CONSTRUCTION STAGING AREA TO BE DETERMINED.



0 1 2 3
ORIGINAL SCALE IN INCHES FOR REDUCED PLANS

VINEYARD DRIVE BIKE LANES					
EROSION CONTROL PLAN					
TEMPLETON, CA					
Designer	Date	Drawn By	Date	Design Engineer	Date
CLB	9/21/2012	KSB	9/21/2012	CG	9/21/2012